



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp®_rate2006 = 88.7

3DBOXX WORKSTATION 8400 Special Edition

SPECfp_rate_base2006 = 78.8

CPU2006 license: 3314


Test date: Dec-2007

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Dec-2007

Tested by: BOXX Technologies, Inc.

Software Availability: Dec-2007

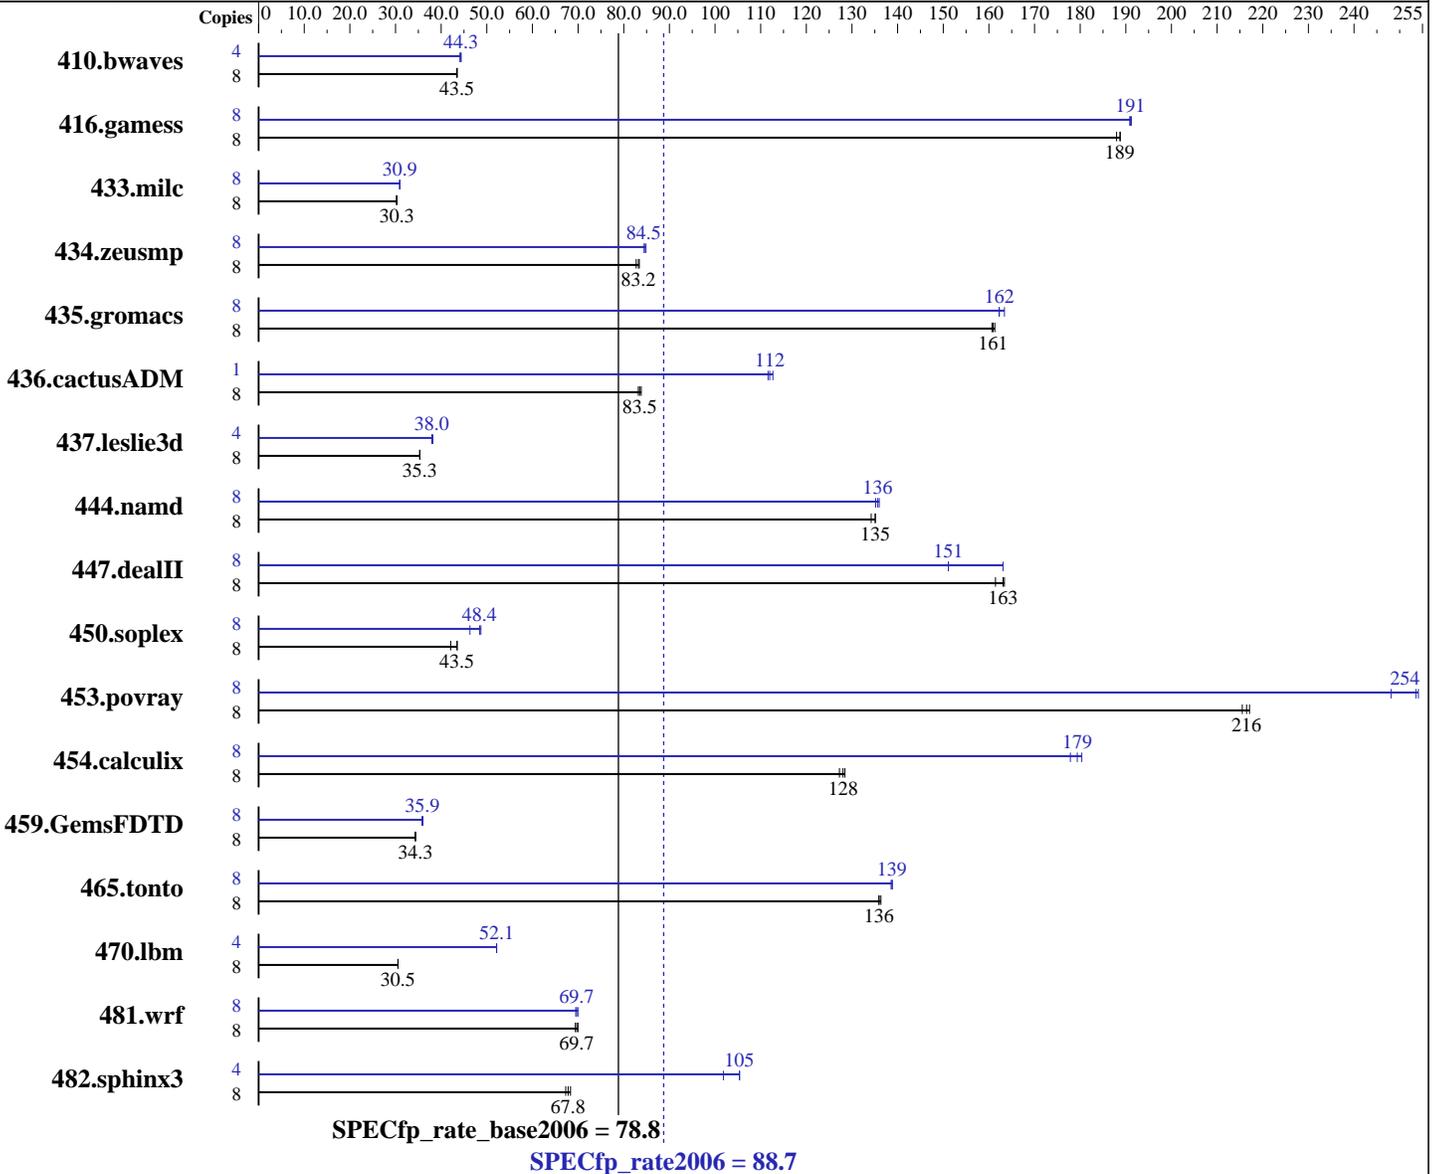

Hardware

CPU Name: Intel Xeon X5482
 CPU Characteristics: 1600 Mhz Bus Speed
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64)
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux
 Build 20070913 Package ID: l_cc_p_10.1.008,
 l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, Run Level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = **88.7**

3DBOXX WORKSTATION 8400 Special Edition

SPECfp_rate_base2006 = **78.8**

CPU2006 license: 3314

Test date: Dec-2007

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Dec-2007

Tested by: BOXX Technologies, Inc.

Software Availability: Dec-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2GB ECC PC2-6400,CL5,FBDIMM)
Disk Subsystem: 1 x 80 GB SATA, 7,200RPM
Other Hardware: None

Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>2502</u>	<u>43.5</u>	2503	43.4	2500	43.5	4	1233	44.1	<u>1226</u>	<u>44.3</u>	1226	44.4
416.gamess	8	833	188	<u>830</u>	<u>189</u>	830	189	8	819	191	<u>820</u>	<u>191</u>	821	191
433.milc	8	2430	30.2	<u>2426</u>	<u>30.3</u>	2425	30.3	8	<u>2375</u>	<u>30.9</u>	2375	30.9	2374	30.9
434.zeusmp	8	<u>875</u>	<u>83.2</u>	880	82.7	873	83.4	8	858	84.9	862	84.5	<u>861</u>	<u>84.5</u>
435.gromacs	8	<u>355</u>	<u>161</u>	354	161	356	161	8	350	163	<u>352</u>	<u>162</u>	352	162
436.cactusADM	8	<u>1145</u>	<u>83.5</u>	1149	83.2	1140	83.8	1	106	113	<u>107</u>	<u>112</u>	107	112
437.leslie3d	8	<u>2130</u>	<u>35.3</u>	2130	35.3	2128	35.3	4	991	38.0	<u>990</u>	<u>38.0</u>	984	38.2
444.namd	8	478	134	<u>475</u>	<u>135</u>	475	135	8	475	135	<u>473</u>	<u>136</u>	472	136
447.dealII	8	567	161	<u>561</u>	<u>163</u>	560	163	8	561	163	606	151	<u>606</u>	<u>151</u>
450.soplex	8	1585	42.1	<u>1535</u>	<u>43.5</u>	1533	43.5	8	1441	46.3	<u>1378</u>	<u>48.4</u>	1370	48.7
453.povray	8	196	217	<u>197</u>	<u>216</u>	197	216	8	172	248	167	254	<u>168</u>	<u>254</u>
454.calculix	8	519	127	514	128	<u>515</u>	<u>128</u>	8	366	180	<u>368</u>	<u>179</u>	371	178
459.GemsFDTD	8	2472	34.3	2469	34.4	<u>2471</u>	<u>34.3</u>	8	2357	36.0	<u>2363</u>	<u>35.9</u>	2371	35.8
465.tonto	8	<u>579</u>	<u>136</u>	577	136	579	136	8	567	139	<u>567</u>	<u>139</u>	568	139
470.lbm	8	3601	30.5	<u>3599</u>	<u>30.5</u>	3598	30.5	4	1054	52.1	<u>1054</u>	<u>52.1</u>	1053	52.2
481.wrf	8	1277	70.0	1288	69.4	<u>1282</u>	<u>69.7</u>	8	1277	70.0	1286	69.5	<u>1282</u>	<u>69.7</u>
482.sphinx3	8	2317	67.3	2282	68.3	<u>2299</u>	<u>67.8</u>	4	766	102	740	105	<u>740</u>	<u>105</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
The "taskset" command was used to bind processes to cores except for 436.cactusADM peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 88.7

3DBOXX WORKSTATION 8400 Special Edition

SPECfp_rate_base2006 = 78.8

CPU2006 license: 3314

Test date: Dec-2007

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Dec-2007

Tested by: BOXX Technologies, Inc.

Software Availability: Dec-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 88.7

3DBOXX WORKSTATION 8400 Special Edition

SPECfp_rate_base2006 = 78.8

CPU2006 license: 3314

Test date: Dec-2007

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Dec-2007

Tested by: BOXX Technologies, Inc.

Software Availability: Dec-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 88.7

3DBOXX WORKSTATION 8400 Special Edition

SPECfp_rate_base2006 = 78.8

CPU2006 license: 3314

Test date: Dec-2007

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Dec-2007

Tested by: BOXX Technologies, Inc.

Software Availability: Dec-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.06.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 88.7

3DBOXX WORKSTATION 8400 Special Edition

SPECfp_rate_base2006 = 78.8

CPU2006 license: 3314

Test date: Dec-2007

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Dec-2007

Tested by: BOXX Technologies, Inc.

Software Availability: Dec-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.06.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 15:21:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 January 2008.