



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint®_rate2006 = 83.9

Fujitsu SPARC Enterprise T5120 (gccfss)

SPECint_rate_base2006 = 76.2

CPU2006 license: 19


Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jan-2008

Hardware Availability: Oct-2007

Software Availability: Jan-2008

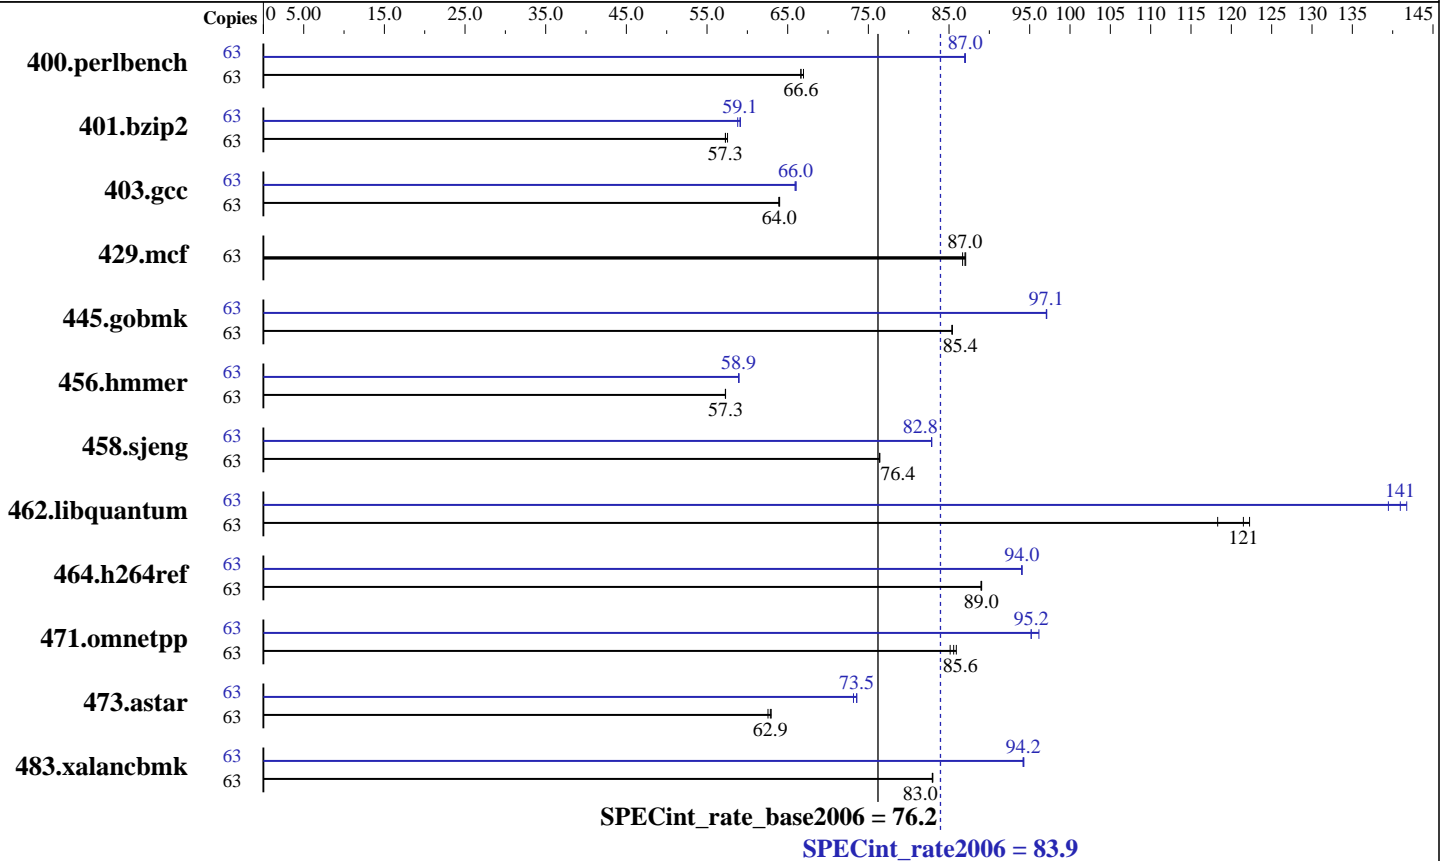

Hardware

CPU Name: UltraSPARC T2
 CPU Characteristics: 1417
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 8 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 16 KB I + 8 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 64 GB
 Disk Subsystem: 384 GB Solaris Volume Manager
 RAID 0, interlace 384KB, on
 4x SUN146G 10K RPM SAS drives
 ufs fragment size 8192 bytes
 Other Hardware: None

Software

Operating System: Solaris 10 8/07 (build s10s_u4wos_12b)
 Compiler: gccfss V4.2.0 (build 20071213)
 See additional detail below.
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 83.9

Fujitsu SPARC Enterprise T5120 (gccfss)

SPECint_rate_base2006 = 76.2

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jan-2008

Hardware Availability: Oct-2007

Software Availability: Jan-2008

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|--------|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 63 | 9193 | 67.0 | 9237 | 66.6 | <u>9236</u> | <u>66.6</u> | 63 | 7079 | 86.9 | 7073 | 87.0 | <u>7075</u> | <u>87.0</u> |
| 401.bzip2 | 63 | 10615 | 57.3 | 10565 | 57.5 | <u>10612</u> | <u>57.3</u> | 63 | <u>10288</u> | <u>59.1</u> | 10281 | 59.1 | 10339 | 58.8 |
| 403.gcc | 63 | 7924 | 64.0 | 7936 | 63.9 | <u>7930</u> | <u>64.0</u> | 63 | <u>7683</u> | <u>66.0</u> | 7694 | 65.9 | 7680 | 66.0 |
| 429.mcf | 63 | 6599 | 87.1 | <u>6606</u> | <u>87.0</u> | 6628 | 86.7 | 63 | 6599 | 87.1 | <u>6606</u> | <u>87.0</u> | 6628 | 86.7 |
| 445.gobmk | 63 | 7737 | 85.4 | <u>7740</u> | <u>85.4</u> | 7741 | 85.4 | 63 | 6809 | 97.1 | 6805 | 97.1 | <u>6807</u> | <u>97.1</u> |
| 456.hammer | 63 | 10263 | 57.3 | <u>10260</u> | <u>57.3</u> | 10259 | 57.3 | 63 | 9973 | 58.9 | 9973 | 58.9 | <u>9973</u> | <u>58.9</u> |
| 458.sjeng | 63 | 9980 | 76.4 | <u>9978</u> | <u>76.4</u> | 9975 | 76.4 | 63 | <u>9202</u> | <u>82.8</u> | 9201 | 82.8 | 9202 | 82.8 |
| 462.libquantum | 63 | <u>10744</u> | <u>121</u> | 11034 | 118 | 10677 | 122 | 63 | 9359 | 139 | 9209 | 142 | <u>9261</u> | <u>141</u> |
| 464.h264ref | 63 | 15657 | 89.0 | 15668 | 89.0 | <u>15667</u> | <u>89.0</u> | 63 | <u>14826</u> | <u>94.0</u> | 14829 | 94.0 | 14825 | 94.0 |
| 471.omnetpp | 63 | <u>4601</u> | <u>85.6</u> | 4584 | 85.9 | 4625 | 85.1 | 63 | 4095 | 96.1 | <u>4136</u> | <u>95.2</u> | 4137 | 95.2 |
| 473.astar | 63 | <u>7037</u> | <u>62.9</u> | 7025 | 63.0 | 7070 | 62.6 | 63 | 6045 | 73.2 | 6012 | 73.6 | <u>6013</u> | <u>73.5</u> |
| 483.xalancbmk | 63 | 5242 | 82.9 | 5238 | 83.0 | <u>5240</u> | <u>83.0</u> | 63 | 4611 | 94.3 | 4616 | 94.2 | <u>4613</u> | <u>94.2</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

The compiler is gccfss, "GCC for SPARC Systems", which combines gcc with the Sun Code Generator for SPARC systems. It is invoked as "gcc", and accepts source code compatible with GCC 4.2. For more information, including support, see <http://cooltools.sunsource.net/gcc/>

Operating System Notes

Processes were bound to cores using "submit" and "pbind".

A processor set was created using

```
psrset -c 1-63
```

and the runspec process was placed into the set using

```
psrset -e 1
```

ulimit -s 131072 was used to allow the stack to grow up to 131072 KB (aka 128 MB). Note that saying "131072" is preferable to "unlimited", because there is a tradeoff between space for the stack vs. space for the heap.

```
/etc/system parameters
```

```
autoup=600
```

Causes pages older than the listed number of seconds to be written by fsflush.

```
tune_t_fsflushr=10
```

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 83.9

Fujitsu SPARC Enterprise T5120 (gccfss)

SPECint_rate_base2006 = 76.2

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jan-2008

Hardware Availability: Oct-2007

Software Availability: Jan-2008

Operating System Notes (Continued)

The "webconsole" service was turned off using
svcadm disable webconsole

Platform Notes

This result was measured on a Sun SPARC Enterprise T5120. These models are electronically equivalent:

- Sun SPARC Enterprise T5120
- Fujitsu SPARC Enterprise T5120

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
 462.libquantum: -DSPEC_CPU_SOLARIS -DSPEC_CPU_NEED_COMPLEX_I
 483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:

-fast -xipo=2 -xpagesize=4M -xprefetch=no%auto

C++ benchmarks:

-fast -xipo=2 -xpagesize=4M -xprefetch=no%auto

Peak Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 83.9

Fujitsu SPARC Enterprise T5120 (gccfss)

SPECint_rate_base2006 = 76.2

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jan-2008

Hardware Availability: Oct-2007

Software Availability: Jan-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
462.libquantum: -DSPEC_CPU_SOLARIS -DSPEC_CPU_NEED_COMPLEX_I
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -xprefetch=no%auto -xalias_level=std
-xrestrict -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -xprefetch=no%auto -xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -xprefetch=no%auto -xalias_level=std

429.mcf: basepeak = yes

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -xrestrict

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -xalias_level=std

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -xprefetch=no%auto

462.libquantum: -fast -xipo=2

464.h264ref: Same as 403.gcc

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -xalias_level=std

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -xprefetch=no%auto -xalias_level=std -lfast

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 83.9

Fujitsu SPARC Enterprise T5120 (gccfss)

SPECint_rate_base2006 = 76.2

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jan-2008

Hardware Availability: Oct-2007

Software Availability: Jan-2008

Peak Optimization Flags (Continued)

```
483.xalancbmk: -xprofile=collect:./feedback(pass 1)
               -xprofile=use:./feedback(pass 2) -fast -xipo=2
               -xpagesize=4M -xprefetch=no%auto -lfast
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 15:12:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 February 2008.