



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp®_rate2006 = 70.8

PRIMERGY TX300 S4, Intel Xeon L5420, 2.50 GHz

SPECfp_rate_base2006 = 64.1

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

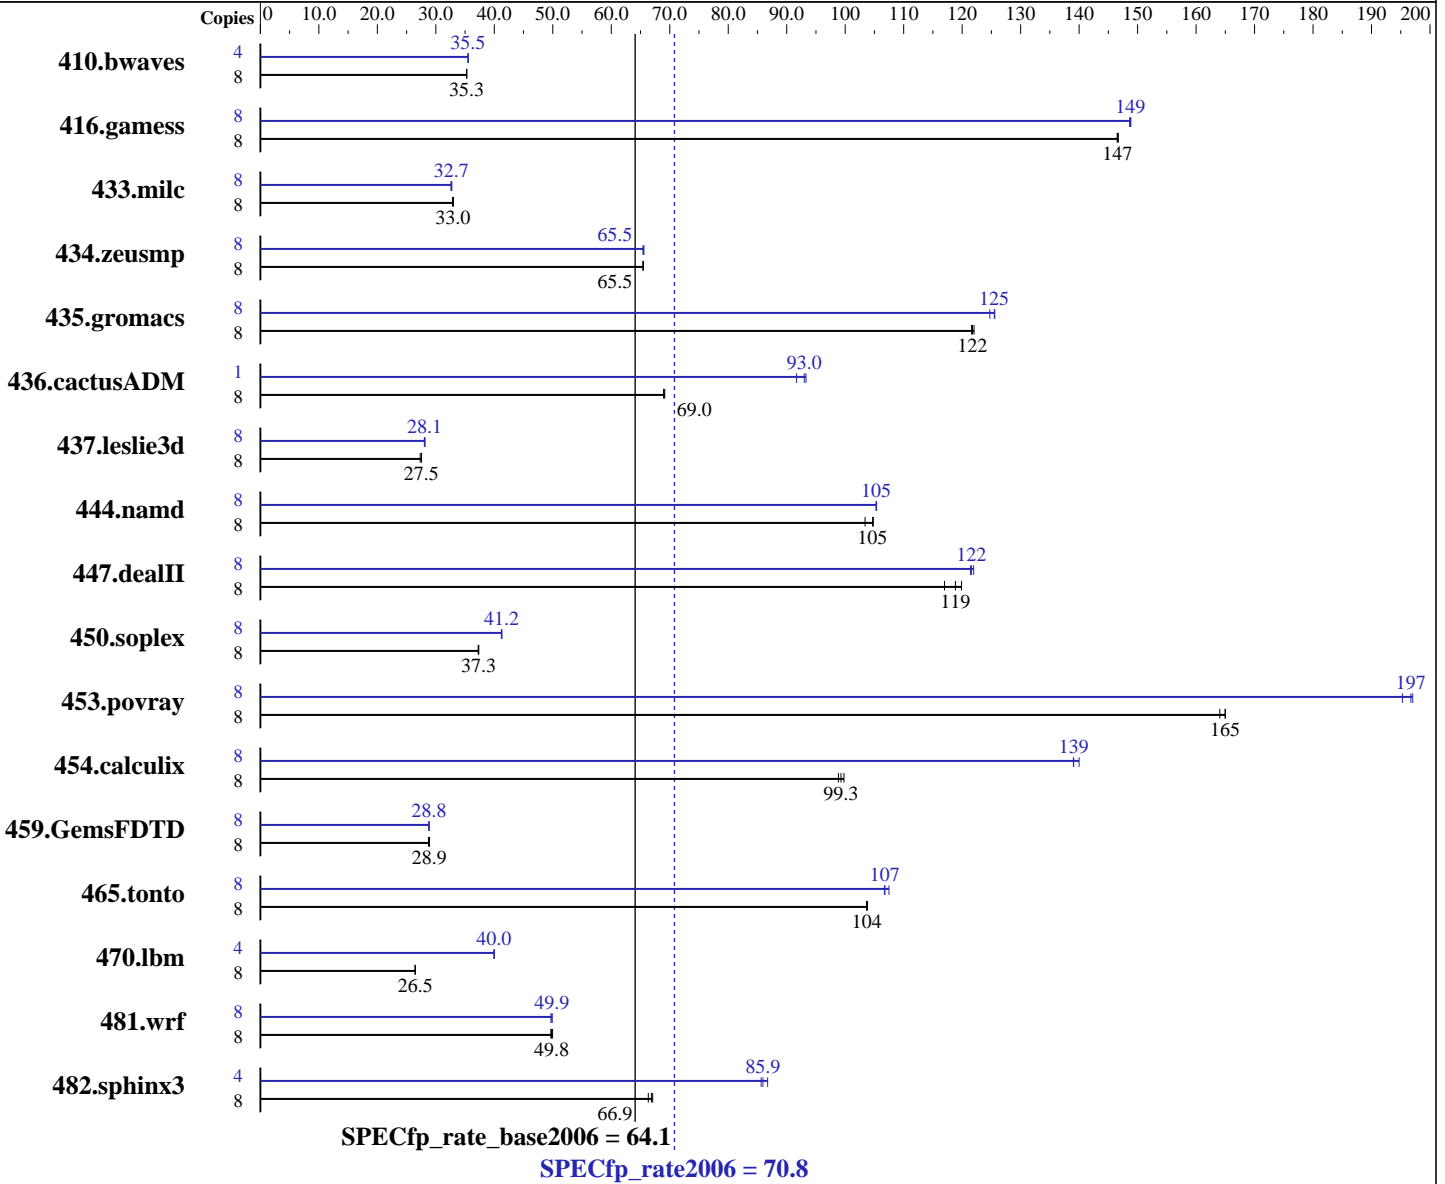

Hardware

CPU Name: Intel Xeon L5420
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **70.8**

PRIMERGY TX300 S4, Intel Xeon L5420, 2.50 GHz

SPECfp_rate_base2006 = **64.1**

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3079	35.3	3085	35.2	3084	35.3	4	1530	35.5	1531	35.5	1531	35.5		
416.gamess	8	1068	147	1069	147	1069	147	8	1053	149	1054	149	1052	149		
433.milc	8	2225	33.0	2229	33.0	2235	32.9	8	2249	32.7	2243	32.7	2254	32.6		
434.zeusmp	8	1112	65.5	1112	65.5	1113	65.4	8	1110	65.6	1113	65.4	1112	65.5		
435.gromacs	8	470	122	469	122	468	122	8	455	126	458	125	455	125		
436.cactusADM	8	1386	69.0	1385	69.0	1383	69.1	1	128	93.0	130	91.7	128	93.3		
437.leslie3d	8	2751	27.3	2730	27.5	2732	27.5	8	2670	28.2	2678	28.1	2682	28.0		
444.namd	8	620	103	613	105	612	105	8	609	105	609	105	609	105		
447.dealII	8	782	117	763	120	770	119	8	750	122	754	121	753	122		
450.soplex	8	1792	37.2	1788	37.3	1787	37.3	8	1619	41.2	1615	41.3	1618	41.2		
453.povray	8	258	165	259	164	258	165	8	218	195	216	197	216	197		
454.calculix	8	665	99.3	661	99.8	668	98.8	8	475	139	471	140	475	139		
459.GemsFDTD	8	2935	28.9	2953	28.7	2934	28.9	8	2941	28.9	2947	28.8	2945	28.8		
465.tonto	8	759	104	759	104	758	104	8	737	107	732	107	738	107		
470.lbm	8	4154	26.5	4151	26.5	4150	26.5	4	1374	40.0	1375	40.0	1376	39.9		
481.wrf	8	1795	49.8	1788	50.0	1799	49.7	8	1792	49.9	1791	49.9	1798	49.7		
482.sphinx3	8	2332	66.9	2324	67.1	2351	66.3	4	910	85.6	907	85.9	899	86.7		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

BIOS configuration:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 70.8

PRIMERGY TX300 S4, Intel Xeon L5420, 2.50 GHz

SPECfp_rate_base2006 = 64.1

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Mar-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

General Notes (Continued)

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 70.8

PRIMERGY TX300 S4, Intel Xeon L5420, 2.50 GHz

SPECfp_rate_base2006 = 64.1

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Mar-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 70.8

PRIMERGY TX300 S4, Intel Xeon L5420, 2.50 GHz

SPECfp_rate_base2006 = 64.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 70.8

PRIMERGY TX300 S4, Intel Xeon L5420, 2.50 GHz

SPECfp_rate_base2006 = 64.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:58:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 February 2008.