



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = 114

PRIMERGY TX300 S4, Intel Xeon L5410, 2.33 GHz

SPECint_rate_base2006 = 93.3

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

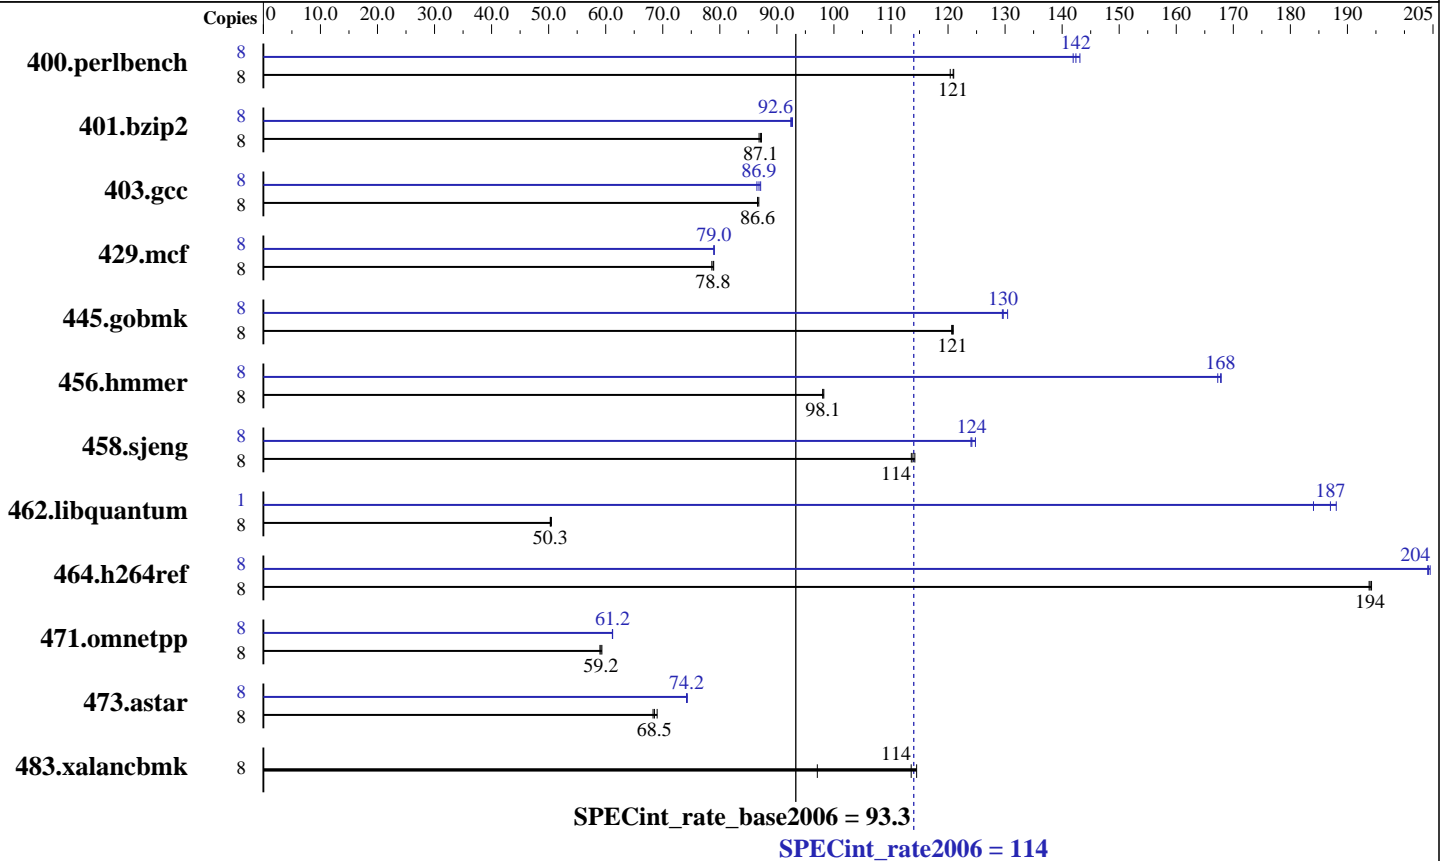

Hardware

CPU Name: Intel Xeon L5410
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
 Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library, Version 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 114

PRIMERGY TX300 S4, Intel Xeon L5410, 2.33 GHz

SPECint_rate_base2006 = 93.3

CPU2006 license: 22

Test date: Feb-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Mar-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	646	121	649	120	646	121	8	549	142	551	142	546	143
401.bzip2	8	884	87.3	886	87.1	889	86.9	8	834	92.6	835	92.4	832	92.7
403.gcc	8	743	86.6	742	86.8	743	86.6	8	744	86.5	741	86.9	739	87.2
429.mcf	8	926	78.8	928	78.6	924	78.9	8	924	79.0	923	79.0	924	79.0
445.gobmk	8	695	121	696	121	694	121	8	648	130	647	130	643	130
456.hmmmer	8	761	98.0	761	98.1	760	98.2	8	445	168	446	167	445	168
458.sjeng	8	850	114	848	114	852	114	8	780	124	780	124	776	125
462.libquantum	8	3296	50.3	3294	50.3	3283	50.5	1	111	187	113	184	110	188
464.h264ref	8	913	194	911	194	913	194	8	867	204	866	204	868	204
471.omnetpp	8	848	59.0	843	59.3	845	59.2	8	817	61.2	817	61.2	817	61.2
473.astar	8	822	68.3	814	69.0	819	68.5	8	756	74.3	757	74.2	757	74.2
483.xalancbmk	8	486	114	482	114	569	97.1	8	486	114	482	114	569	97.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmmer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 114

PRIMERGY TX300 S4, Intel Xeon L5410, 2.33 GHz

SPECint_rate_base2006 = 93.3

CPU2006 license: 22

Test date: Feb-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Mar-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3
C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc
401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 114

PRIMERGY TX300 S4, Intel Xeon L5410, 2.33 GHz

SPECint_rate_base2006 = 93.3

CPU2006 license: 22

Test date: Feb-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Mar-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 114

PRIMERGY TX300 S4, Intel Xeon L5410, 2.33 GHz

SPECint_rate_base2006 = 93.3

CPU2006 license: 22

Test date: Feb-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Mar-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.04.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:43:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 March 2008.