



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 42.6**

PowerEdge 2950 III (Intel Xeon 5148 LV, 2.33 GHz)

**SPECfp\_rate\_base2006 = 39.5**

CPU2006 license: 55


Test date: Feb-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

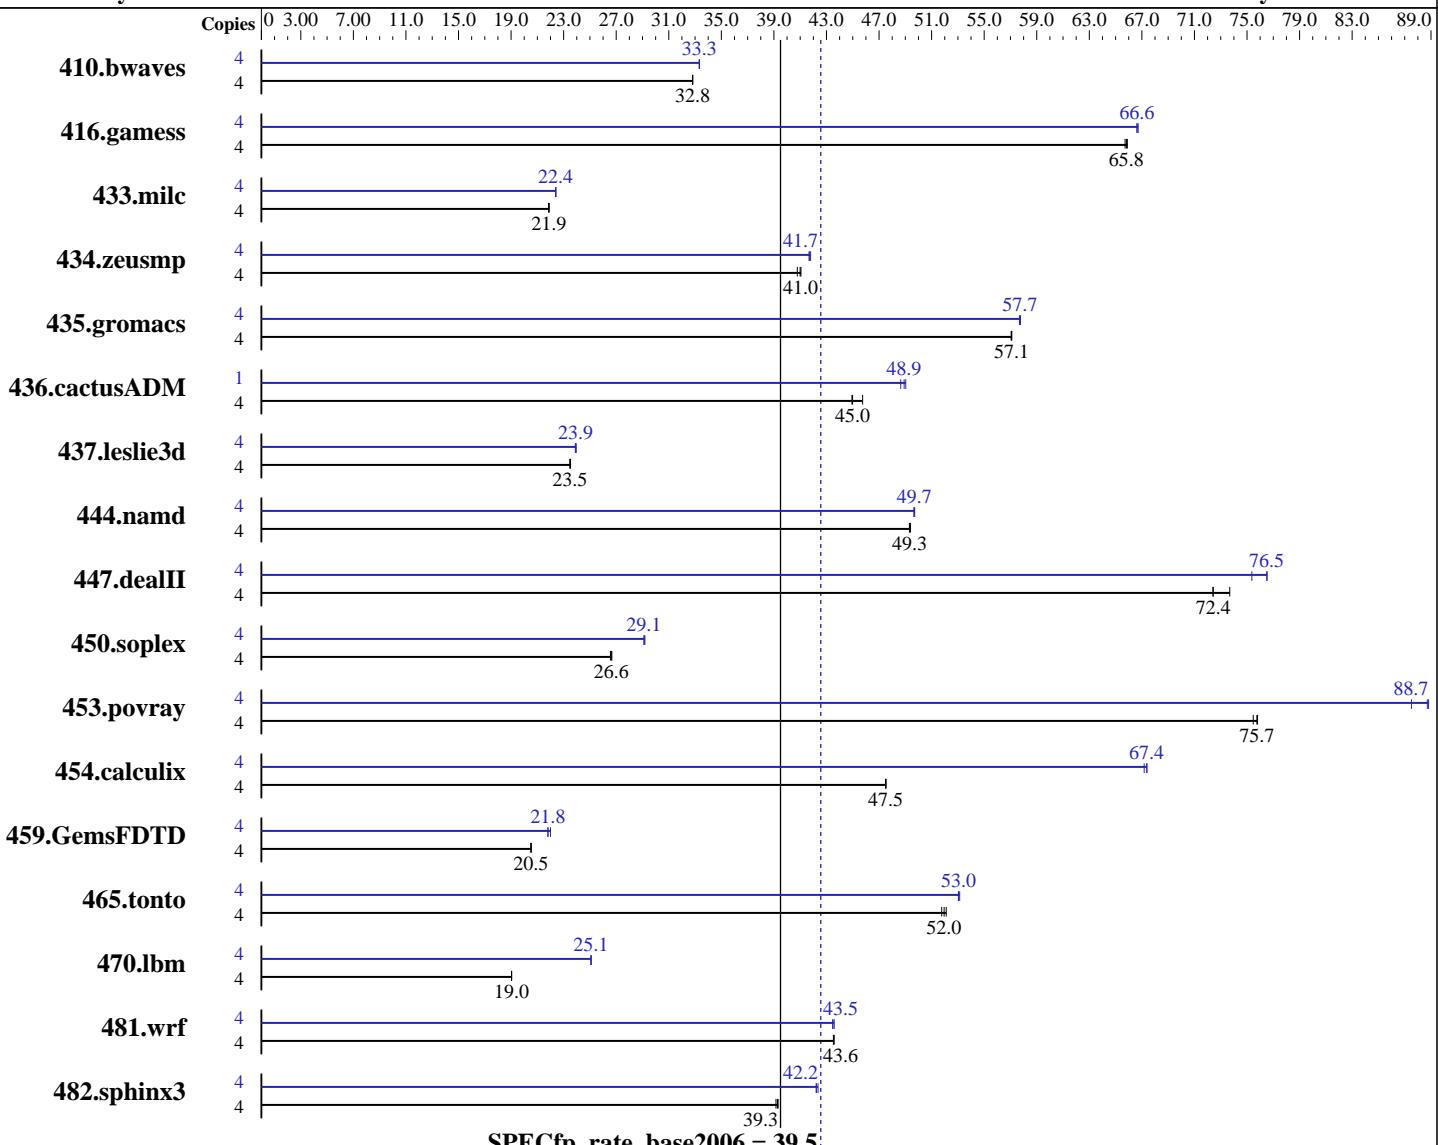

## Hardware

CPU Name: Intel Xeon 5148 LV  
CPU Characteristics: 1333 MHz system bus  
CPU MHz: 2333  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 4 MB I+D on chip per chip

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: 1\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 42.6**

PowerEdge 2950 III (Intel Xeon 5148 LV, 2.33 GHz)

**SPECfp\_rate\_base2006 = 39.5**

CPU2006 license: 55

Test date: Feb-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (8x1 GB 667 MHz ECC CL5 FB-DIMM)  
 Disk Subsystem: 1 x 73 GB SAS 15k RPM  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<b>1657</b>	<b>32.8</b>	1656	32.8	1657	32.8	4	1631	33.3	<b>1631</b>	<b>33.3</b>	1631	33.3
416.gamess	4	1192	65.7	<b>1190</b>	<b>65.8</b>	1189	65.9	4	1174	66.7	<b>1175</b>	<b>66.6</b>	1176	66.6
433.milc	4	1677	21.9	1680	21.9	<b>1678</b>	<b>21.9</b>	4	1640	22.4	<b>1639</b>	<b>22.4</b>	1639	22.4
434.zeusmp	4	893	40.8	887	41.1	<b>888</b>	<b>41.0</b>	4	873	41.7	871	41.8	<b>873</b>	<b>41.7</b>
435.gromacs	4	<b>500</b>	<b>57.1</b>	501	57.1	500	57.1	4	<b>495</b>	<b>57.7</b>	494	57.8	495	57.7
436.cactusADM	4	1045	45.8	<b>1063</b>	<b>45.0</b>	1064	44.9	1	246	48.7	244	49.0	<b>244</b>	<b>48.9</b>
437.leslie3d	4	1598	23.5	1601	23.5	<b>1601</b>	<b>23.5</b>	4	1574	23.9	1570	24.0	<b>1572</b>	<b>23.9</b>
444.namd	4	651	49.3	650	49.4	<b>650</b>	<b>49.3</b>	4	645	49.7	646	49.7	<b>646</b>	<b>49.7</b>
447.dealII	4	<b>632</b>	<b>72.4</b>	632	72.4	621	73.7	4	<b>598</b>	<b>76.5</b>	607	75.4	<b>598</b>	76.5
450.soplex	4	1256	26.6	<b>1253</b>	<b>26.6</b>	1251	26.7	4	<b>1145</b>	<b>29.1</b>	1143	29.2	1146	29.1
453.povray	4	281	75.8	<b>281</b>	<b>75.7</b>	282	75.5	4	<b>240</b>	<b>88.7</b>	243	87.5	240	88.8
454.calculix	4	694	47.5	695	47.5	<b>695</b>	<b>47.5</b>	4	<b>490</b>	<b>67.4</b>	491	67.2	490	67.4
459.GemsFDTD	4	<b>2069</b>	<b>20.5</b>	2067	20.5	2069	20.5	4	1929	22.0	<b>1946</b>	<b>21.8</b>	1947	21.8
465.tonto	4	<b>758</b>	<b>52.0</b>	755	52.1	760	51.8	4	<b>742</b>	<b>53.0</b>	742	53.0	741	53.1
470.lbm	4	2887	19.0	2887	19.0	<b>2887</b>	<b>19.0</b>	4	<b>2191</b>	<b>25.1</b>	2191	25.1	2191	25.1
481.wrf	4	1025	43.6	<b>1025</b>	<b>43.6</b>	1027	43.5	4	1025	43.6	<b>1027</b>	<b>43.5</b>	1028	43.5
482.sphinx3	4	1983	39.3	1991	39.2	<b>1985</b>	<b>39.3</b>	4	1847	42.2	1841	42.4	<b>1846</b>	<b>42.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores

KMP\_STACK\_SIZE set to 64M

KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
 '/usr/bin/taskset' used to bind processes to CPUs



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 III (Intel Xeon 5148 LV, 2.33 GHz)

**SPECfp\_rate2006 = 42.6**

**SPECfp\_rate\_base2006 = 39.5**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

## Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetch = Disabled (default Enabled)

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 III (Intel Xeon 5148 LV, 2.33 GHz)

**SPECfp\_rate2006 = 42.6**

**SPECfp\_rate\_base2006 = 39.5**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2008

**Hardware Availability:** Nov-2007

**Software Availability:** Nov-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2950 III (Intel Xeon 5148 LV, 2.33 GHz)

**SPECfp\_rate2006 = 42.6**

**SPECfp\_rate\_base2006 = 39.5**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2008

**Hardware Availability:** Nov-2007

**Software Availability:** Nov-2007

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 42.6**

PowerEdge 2950 III (Intel Xeon 5148 LV, 2.33 GHz)

**SPECfp\_rate\_base2006 = 39.5**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2008

**Hardware Availability:** Nov-2007

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.03.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:45:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 March 2008.