SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX221 (Intel Xeon E5405)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 59.0

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

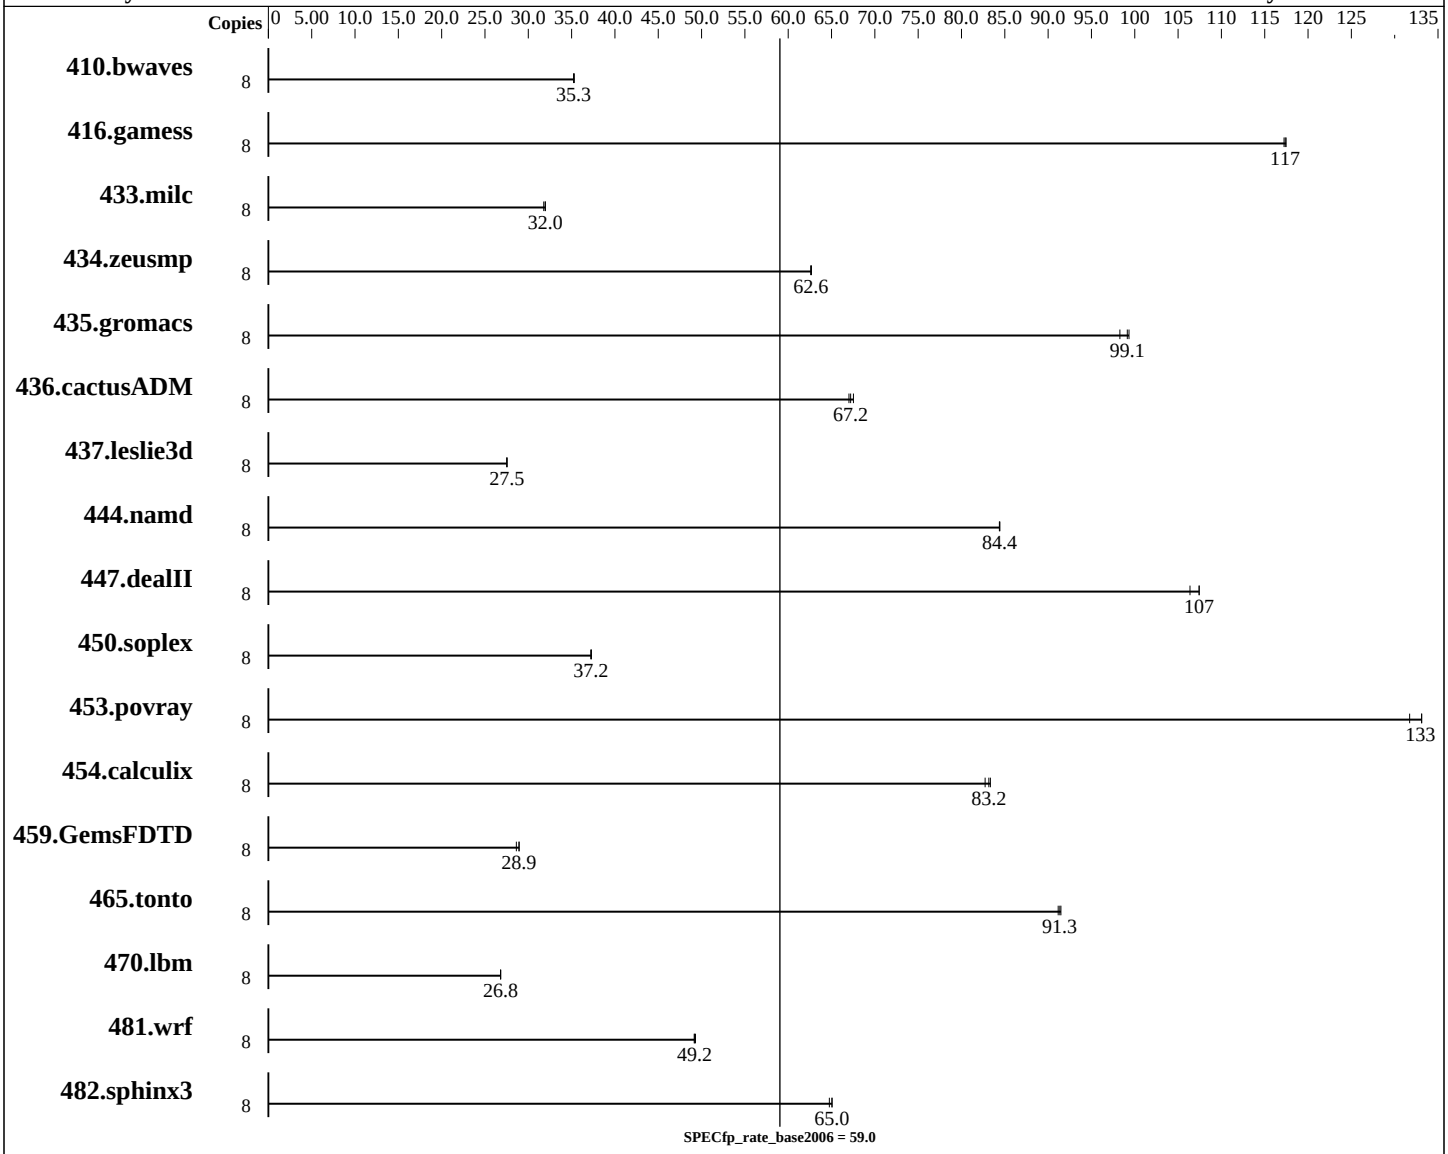

Hardware

CPU Name:	Intel Xeon E5405
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux64 version 10.1 Build 20080112 Package ID: l_fc_p_10.1.012 Intel Fortran Compiler for Linux64 version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
Auto Parallel:	No
File System:	ReiserFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX221 (Intel Xeon E5405)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 59.0

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

L3 Cache:	None	System State:	Multi-User, Run Level 3
Other Cache:	None	Base Pointers:	64-bit
Memory:	16 GB (8 * 2 GB DDR2 5300F, 2 rank, CL5 ECC)	Peak Pointers:	Not Applicable
Disk Subsystem:	1 x SCSI, 73GB, 15000RPM	Other Software:	Binutils 2.17.10.50
Other Hardware:	None		MicroQuill SmartHeap 8.1

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3086	35.2	3080	35.3	**3084**	**35.3**							
416.gamess	8	1333	117	1336	117	**1335**	**117**							
433.milc	8	2298	32.0	**2298**	**32.0**	2311	31.8							
434.zeusmp	8	**1163**	**62.6**	1161	62.7	1163	62.6							
435.gromacs	8	**576**	**99.1**	581	98.3	575	99.3							
436.cactusADM	8	1416	67.5	1427	67.0	**1423**	**67.2**							
437.leslie3d	8	2732	27.5	**2731**	**27.5**	2731	27.5							
444.namd	8	**760**	**84.4**	760	84.4	760	84.4							
447.dealII	8	860	106	**852**	**107**	852	107							
450.soplex	8	1790	37.3	**1792**	**37.2**	1792	37.2							
453.povray	8	**320**	**133**	323	132	320	133							
454.calculix	8	792	83.3	798	82.7	**794**	**83.2**							
459.GemsFDTD	8	**2935**	**28.9**	2966	28.6	2933	28.9							
465.tonto	8	**862**	**91.3**	861	91.5	864	91.2							
470.lbm	8	4102	26.8	**4100**	**26.8**	4100	26.8							
481.wrf	8	1813	49.3	**1816**	**49.2**	1818	49.1							
482.sphinx3	8	2397	65.1	**2397**	**65.0**	2408	64.7							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors.
```

Platform Notes

```
BIOS configuration:
Hardware Prefetcher Disabled (default Enabled)
```

General Notes

```
This result was measured on the Servidor Itautec MX201.
The Servidor Itautec MX221 and the Servidor Itautec MX201 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 15:34:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 March 2008.