SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8500)

SPECint®2006 = 24.6

SPECint_base2006 = 22.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Feb-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

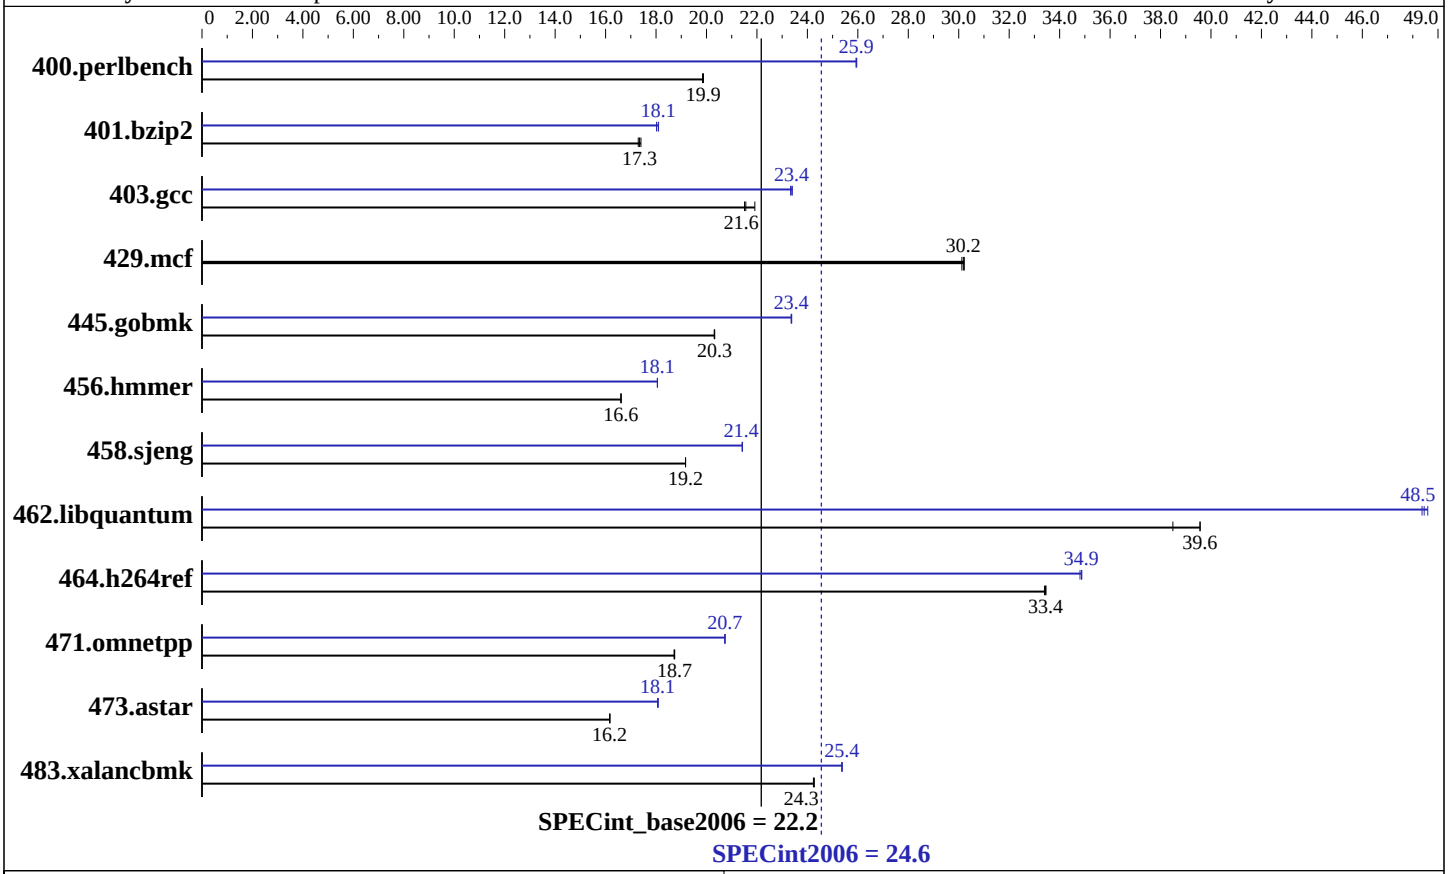

Hardware

CPU Name:	Intel Core 2 Duo E8500
CPU Characteristics:	3.16 GHz, 1333 FSB
CPU MHz:	3167
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2x1GB Micron DDR2-800 CL5)
Disk Subsystem:	Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate (64-bit)
Compiler:	Intel C++ Compiler for IA32 version 10.1 Build 20070913 Package ID: w_cc_p_10.1.011 Microsoft Visual Studio 2005 SP1 (for libraries)
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	SmartHeap Library Version 8.1 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8500)

SPECint2006 = 24.6

SPECint_base2006 = 22.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Feb-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	492	19.8	**492**	**19.9**	492	19.9	377	25.9	**377**	**25.9**	376	26.0
401.bzip2	558	17.3	**556**	**17.3**	555	17.4	536	18.0	**534**	**18.1**	533	18.1
403.gcc	374	21.5	**373**	**21.6**	367	21.9	**344**	**23.4**	345	23.3	344	23.4
429.mcf	303	30.1	**302**	**30.2**	302	30.2	303	30.1	**302**	**30.2**	302	30.2
445.gobmk	517	20.3	**516**	**20.3**	516	20.3	449	23.4	**449**	**23.4**	449	23.4
456.hmmer	**562**	**16.6**	562	16.6	561	16.6	517	18.1	**517**	**18.1**	517	18.1
458.sjeng	**631**	**19.2**	631	19.2	631	19.2	**565**	**21.4**	565	21.4	565	21.4
462.libquantum	538	38.5	524	39.6	**524**	**39.6**	426	48.6	428	48.4	**428**	**48.5**
464.h264ref	663	33.4	661	33.5	**662**	**33.4**	636	34.8	**635**	**34.9**	634	34.9
471.omnetpp	334	18.7	334	18.7	**334**	**18.7**	302	20.7	**302**	**20.7**	301	20.7
473.astar	434	16.2	**434**	**16.2**	434	16.2	389	18.1	**389**	**18.1**	388	18.1
483.xalancbmk	285	24.2	284	24.3	**284**	**24.3**	272	25.4	**272**	**25.4**	272	25.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 03/2008:
http://www.intel.com/products/motherboard/DQ35JO/index.htm
The system bus runs at 1333 MHz
System was configured with Asus EN8800GTX discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)
The following VS 2005 SP1 updates were applied: KB926601 and KB932232
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc8 -Qc99
```

C++ benchmarks:

```
icl -Qvc8
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-fast -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000
libguide40.lib
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib libguide40.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc8 -Qc99
```

C++ benchmarks:
```
icl -Qvc8
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qprefetch -Qparallel -Qpar-runtime-control /F512000000 shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE`

401.bzip2: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qprefetch /F512000000 libguide40.lib`

403.gcc: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000 libguide40.lib`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias -Qopt-multi-version-aggressive /F512000000 libguide40.lib

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4 /F512000000 libguide40.lib

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch -Qopt-streaming-stores:always -Qparallel -Qpar-runtime-control /F512000000 libguide40.lib

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias /F512000000 libguide40.lib

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=block -Qcxx_features /F512000000 shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=routine -Qcxx_features /F512000000 shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qcxx_features /F512000000 shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:31:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 March 2008.