



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8400)

SPECint®2006 = 23.5

SPECint_base2006 = 21.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Feb-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

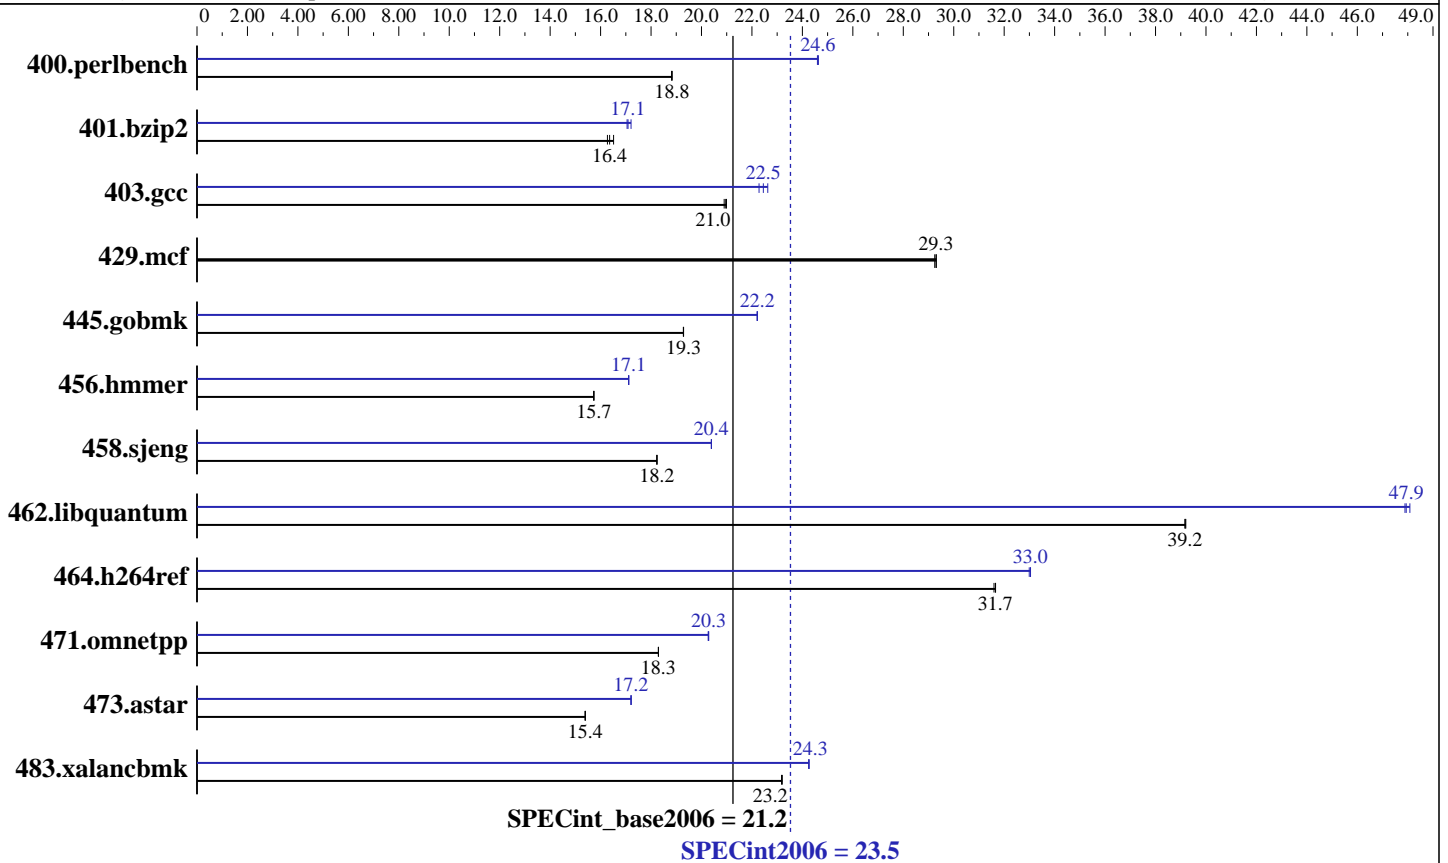

Hardware

CPU Name: Intel Core 2 Duo E8400
 CPU Characteristics: 3.00 GHz, 1333 FSB
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 2 GB (2x1GB Micron DDR2-800 CL5)
 Disk Subsystem: Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows Vista Ultimate (64-bit)
 Compiler: Intel C++ Compiler for IA32 version 10.1
 Build 20070913 Package ID: w_cc_p_10.1.011
 Microsoft Visual Studio 2005 SP1 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8400)

SPECint2006 = **23.5**

SPECint_base2006 = **21.2**

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Feb-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	519	18.8	<u>519</u>	<u>18.8</u>	519	18.8	397	24.6	<u>397</u>	<u>24.6</u>	397	24.6
401.bzip2	<u>590</u>	<u>16.4</u>	593	16.3	584	16.5	<u>565</u>	<u>17.1</u>	566	17.0	561	17.2
403.gcc	385	20.9	384	21.0	<u>384</u>	<u>21.0</u>	361	22.3	<u>359</u>	<u>22.5</u>	356	22.6
429.mcf	312	29.2	<u>311</u>	<u>29.3</u>	311	29.3	312	29.2	<u>311</u>	<u>29.3</u>	311	29.3
445.gobmk	544	19.3	544	19.3	<u>544</u>	<u>19.3</u>	472	22.2	472	22.2	<u>472</u>	<u>22.2</u>
456.hammer	593	15.7	593	15.7	<u>593</u>	<u>15.7</u>	545	17.1	545	17.1	<u>545</u>	<u>17.1</u>
458.sjeng	<u>664</u>	<u>18.2</u>	664	18.2	663	18.2	593	20.4	<u>593</u>	<u>20.4</u>	593	20.4
462.libquantum	<u>529</u>	<u>39.2</u>	529	39.2	529	39.2	433	47.9	431	48.1	<u>432</u>	<u>47.9</u>
464.h264ref	700	31.6	<u>699</u>	<u>31.7</u>	699	31.7	671	33.0	<u>670</u>	<u>33.0</u>	670	33.0
471.omnetpp	342	18.3	342	18.3	<u>342</u>	<u>18.3</u>	308	20.3	308	20.3	<u>308</u>	<u>20.3</u>
473.astar	456	15.4	456	15.4	<u>456</u>	<u>15.4</u>	<u>408</u>	<u>17.2</u>	408	17.2	408	17.2
483.xalancbmk	<u>298</u>	<u>23.2</u>	297	23.2	298	23.2	<u>284</u>	<u>24.3</u>	285	24.3	284	24.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 03/2008:

<http://www.intel.com/products/motherboard/DQ35JO/index.htm>

The system bus runs at 1333 MHz

System was configured with Asus EN8800GTX discrete graphics card

Binaries were built on Windows Vista Ultimate (32-bit)

The following VS 2005 SP1 updates were applied: KB926601 and KB932232

Base Compiler Invocation

C benchmarks:

```
icl -Qvc8 -Qc99
```

C++ benchmarks:

```
icl -Qvc8
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.5

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8400)

SPECint_base2006 = 21.2

CPU2006 license: 13

Test date: Feb-2008

Test sponsor: Intel Corporation

Hardware Availability: Feb-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

```
-fast -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000
libguide40.lib
```

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib libguide40.lib
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc8 -Qc99
```

C++ benchmarks:

```
icl -Qvc8
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qprefetch -Qparallel -Qpar-runtime-control /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
/F512000000 libguide40.lib

403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
libguide40.lib
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.5

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8400)

SPECint_base2006 = 21.2

CPU2006 license: 13

Test date: Feb-2008

Test sponsor: Intel Corporation

Hardware Availability: Feb-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
-Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -Qopt-multi-version-aggressive /F512000000
libguide40.lib

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
/F512000000 libguide40.lib

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch
-Qopt-streaming-stores:always -Qparallel
-Qpar-runtime-control /F512000000 libguide40.lib

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias /F512000000 libguide40.lib

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=block -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=routine -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qcxx_features /F512000000 shlw32m.lib libguide40.lib
-link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8400)

SPECint2006 = 23.5

SPECint_base2006 = 21.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Feb-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:29:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 March 2008.