



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint®_rate2006 = 42.4

Acer Altos R520 (Intel Xeon X5260)

SPECint_rate_base2006 = 37.0

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

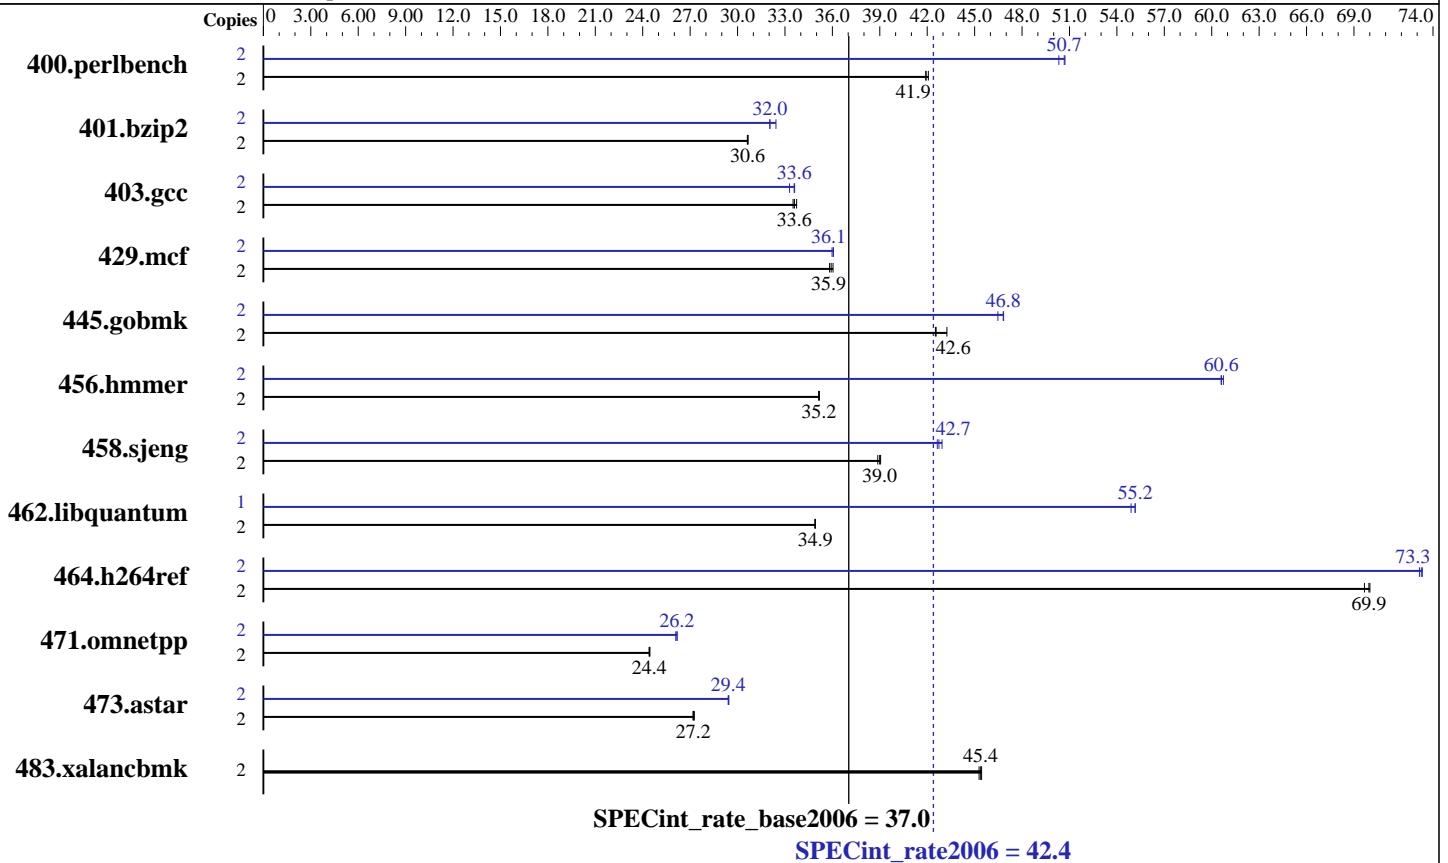

Hardware

CPU Name: Intel Xeon X5260
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)
 Disk Subsystem: 1 x 73GB 10000PRM SAS HDD
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 SP1 (x86_64)
 Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 10.1 for Linux
 Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 42.4

Acer Altos R520 (Intel Xeon X5260)

SPECint_rate_base2006 = 37.0

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	464	42.1	466	41.9	466	41.9	2	385	50.7	388	50.3	386	50.7
401.bzip2	2	629	30.7	630	30.6	630	30.6	2	602	32.0	595	32.4	602	32.0
403.gcc	2	480	33.5	479	33.6	477	33.7	2	479	33.6	484	33.3	479	33.6
429.mcf	2	506	36.0	509	35.8	508	35.9	2	506	36.1	506	36.1	507	36.0
445.gobmk	2	493	42.6	493	42.5	485	43.2	2	448	46.8	451	46.5	448	46.8
456.hmmer	2	531	35.2	530	35.2	531	35.1	2	308	60.6	307	60.7	308	60.6
458.sjeng	2	621	39.0	620	39.1	623	38.9	2	568	42.6	566	42.7	564	42.9
462.libquantum	2	1187	34.9	1188	34.9	1187	34.9	1	376	55.2	377	54.9	376	55.2
464.h264ref	2	635	69.7	632	70.0	633	69.9	2	604	73.3	604	73.3	605	73.1
471.omnetpp	2	511	24.5	512	24.4	512	24.4	2	479	26.1	478	26.2	478	26.2
473.astar	2	515	27.3	516	27.2	516	27.2	2	477	29.4	477	29.5	477	29.4
483.xalancbmk	2	305	45.3	304	45.4	304	45.4	2	305	45.3	304	45.4	304	45.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

This result was measured on the Acer Altos R520.
The Altos R720 and Altos R520 are electronically equivalent.

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

BIOS Settings

Hardware Prefetcher set to ON

Adjacent Cache Line Prefetch set to ON

All results but peak 462.libquantum used taskset to bind processes to cores.

"ulimit -s unlimited" was set for stacksize unlimited

OMP_NUM_THREADS set to number of cores

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 42.4

Acer Altos R520 (Intel Xeon X5260)

SPECint_rate_base2006 = 37.0

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 42.4

Acer Altos R520 (Intel Xeon X5260)

SPECint_rate_base2006 = 37.0

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint_rate2006 = 42.4

Acer Altos R520 (Intel Xeon X5260)

SPECint_rate_base2006 = 37.0

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:09:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 April 2008.