



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers
CELSIUS M460, Intel Core 2 Duo E8500

SPECint®2006 = 24.3

SPECint_base2006 = 22.1

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

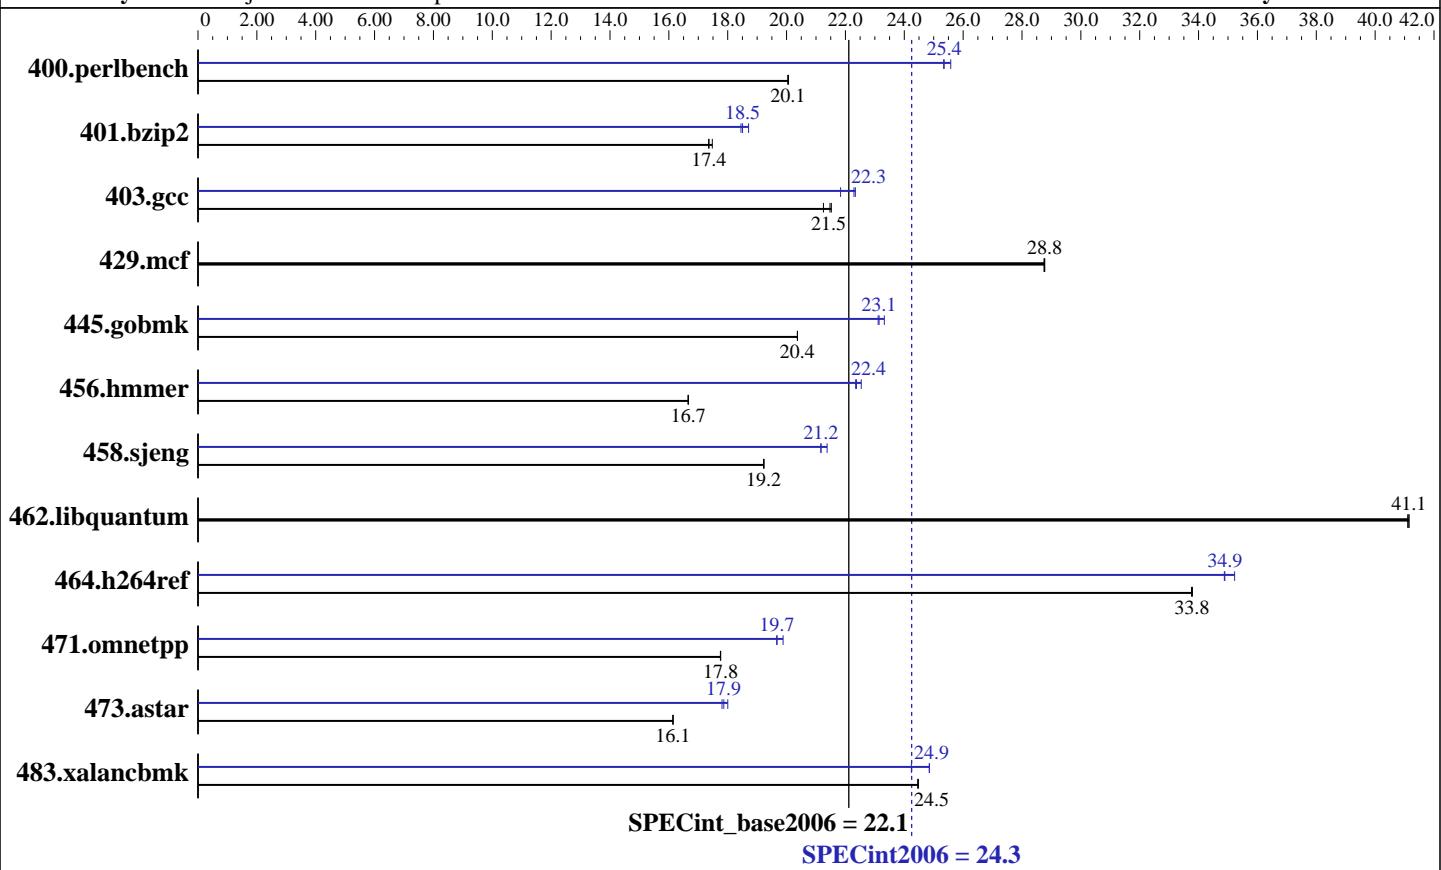

Hardware

CPU Name: Intel Core 2 Duo E8500
CPU Characteristics:
CPU MHz: 3167
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 6 MB I+D on chip per chip
L3 Cache: None
Other Cache: None
Memory: 4 GB (4x1 GB PC2-6400 CL6 SDRAM)
Disk Subsystem: 1 x 400 GB SATA 7200 RPM
Other Hardware: None

Software

Operating System: Windows Vista Ultimate, 64 bit Version
Compiler: Intel C++ Compiler
for applications running on IA-32, Version 10.1, Build 20070913
Intel C++ Compiler
for applications running on Intel 64, Version 10.1, Build 20070913
Microsoft Visual Studio 2005 with SP1 (for libraries)
Auto Parallel: Yes
File System: NTFS
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS M460, Intel Core 2 Duo E8500

SPECint2006 = 24.3

CPU2006 license: 22

Test date: Feb-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Feb-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	487	20.0	487	20.1	487	20.1	382	25.6	385	25.4	386	25.3
401.bzip2	556	17.4	556	17.4	552	17.5	516	18.7	522	18.5	523	18.5
403.gcc	375	21.5	379	21.3	374	21.5	361	22.3	369	21.8	360	22.3
429.mcf	317	28.7	317	28.8	317	28.8	317	28.7	317	28.8	317	28.8
445.gobmk	515	20.4	515	20.4	515	20.4	450	23.3	454	23.1	453	23.1
456.hammer	560	16.7	560	16.7	560	16.7	414	22.5	417	22.4	418	22.3
458.sjeng	629	19.2	629	19.2	629	19.2	566	21.4	572	21.2	572	21.2
462.libquantum	504	41.1	504	41.1	504	41.1	504	41.1	504	41.1	504	41.1
464.h264ref	655	33.8	656	33.8	655	33.8	628	35.2	634	34.9	635	34.9
471.omnetpp	352	17.8	352	17.8	352	17.8	314	19.9	318	19.7	318	19.7
473.astar	435	16.1	435	16.1	435	16.1	390	18.0	394	17.8	393	17.9
483.xalancbmk	282	24.5	282	24.5	282	24.5	278	24.9	285	24.2	278	24.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS default settings have been used.

General Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hammer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com/>

Base Compiler Invocation

C benchmarks:

 icl -Qvc8 -Qc99

C++ benchmarks:

 icl -Qvc8



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 24.3

CELSIUS M460, Intel Core 2 Duo E8500

SPECint_base2006 = 22.1

CPU2006 license: 22

Test date: Feb-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Feb-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp, --no_wchar_t_keyword

Base Optimization Flags

C benchmarks:

-fast -Qparallel -Qvec-guard-write -Qpar-runtime-control -F512000000
libguide40.lib

C++ benchmarks:

-fast -Qcxx-features -F512000000 libguide40.lib shlw32M.lib
-link -FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc8 -Qc99

401.bzip2: C:\\\\DevelTools\\\\Intel\\\\Compiler\\\\C++\\\\10.1.011\\\\EM64T\\\\Bin\\\\icl.exe
-IC:\\\\DevelTools\\\\Intel\\\\Compiler\\\\C++\\\\10.1.011\\\\EM64T\\\\Include
-link -LIBPATH:C:\\\\DevelTools\\\\Intel\\\\Compiler\\\\C++\\\\10.1.011\\\\EM64T\\\\Lib
-link -LIBPATH:"C:\\\\Program Files\\\\Microsoft Visual Studio 8\\\\vc\\\\lib"
-link -LIBPATH:"C:\\\\Program Files\\\\Microsoft Visual Studio 8\\\\vc\\\\lib\\\\amd64"

456.hmmer: C:\\\\DevelTools\\\\Intel\\\\Compiler\\\\C++\\\\10.1.011\\\\EM64T\\\\Bin\\\\icl.exe
-IC:\\\\DevelTools\\\\Intel\\\\Compiler\\\\C++\\\\10.1.011\\\\EM64T\\\\Include
-link -LIBPATH:C:\\\\DevelTools\\\\Intel\\\\Compiler\\\\C++\\\\10.1.011\\\\EM64T\\\\Lib
-link -LIBPATH:"C:\\\\Program Files\\\\Microsoft Visual Studio 8\\\\vc\\\\lib"
-link -LIBPATH:"C:\\\\Program Files\\\\Microsoft Visual Studio 8\\\\vc\\\\lib\\\\amd64"

C++ benchmarks:

icl -Qvc8



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers
CELSIUS M460, Intel Core 2 Duo E8500

SPECint2006 = 24.3
SPECint_base2006 = 22.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

Peak Portability Flags

```
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_WIN32
456.hmmer: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption_cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qparallel
               -Qpar-runtime-control -Qansi-alias -Qprefetch -F512000000
               libguide40.lib shlW32M.lib -link -FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
               -F512000000 libguide40.lib

403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F512000000
               libguide40.lib

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -O2 -Qipo -QxT
               -Qprec-div- -Qansi-alias -F512000000

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
               -Qansi-alias -Qopt-multi-version-aggressive -F512000000
               libguide40.lib

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
               -F512000000 libguide40.lib

462.libquantum: basepeak = yes

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
               -Qansi-alias -F512000000 libguide40.lib
```

C++ benchmarks:

```
471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
               -Qansi-alias -Qopt-ra-region-strategy=block -F512000000
               libguide40.lib shlW32M.lib -link -FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
               -Qansi-alias -Qopt-ra-region-strategy=routine -F512000000
               libguide40.lib shlW32M.lib -link -FORCE:MULTIPLE
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS M460, Intel Core 2 Duo E8500

SPECint2006 = 24.3

SPECint_base2006 = 22.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
-Qansi-alias -F512000000 libguide40.lib shlw32M.lib
-link -FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.02.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.02.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:52:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 April 2008.