



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 56.9

Servidor Itautec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 50.6

CPU2006 license: 9001


Test sponsor: Itautec

Tested by: Itautec

Test date: Mar-2008

Hardware Availability: Dec-2007

Software Availability: Jan-2008

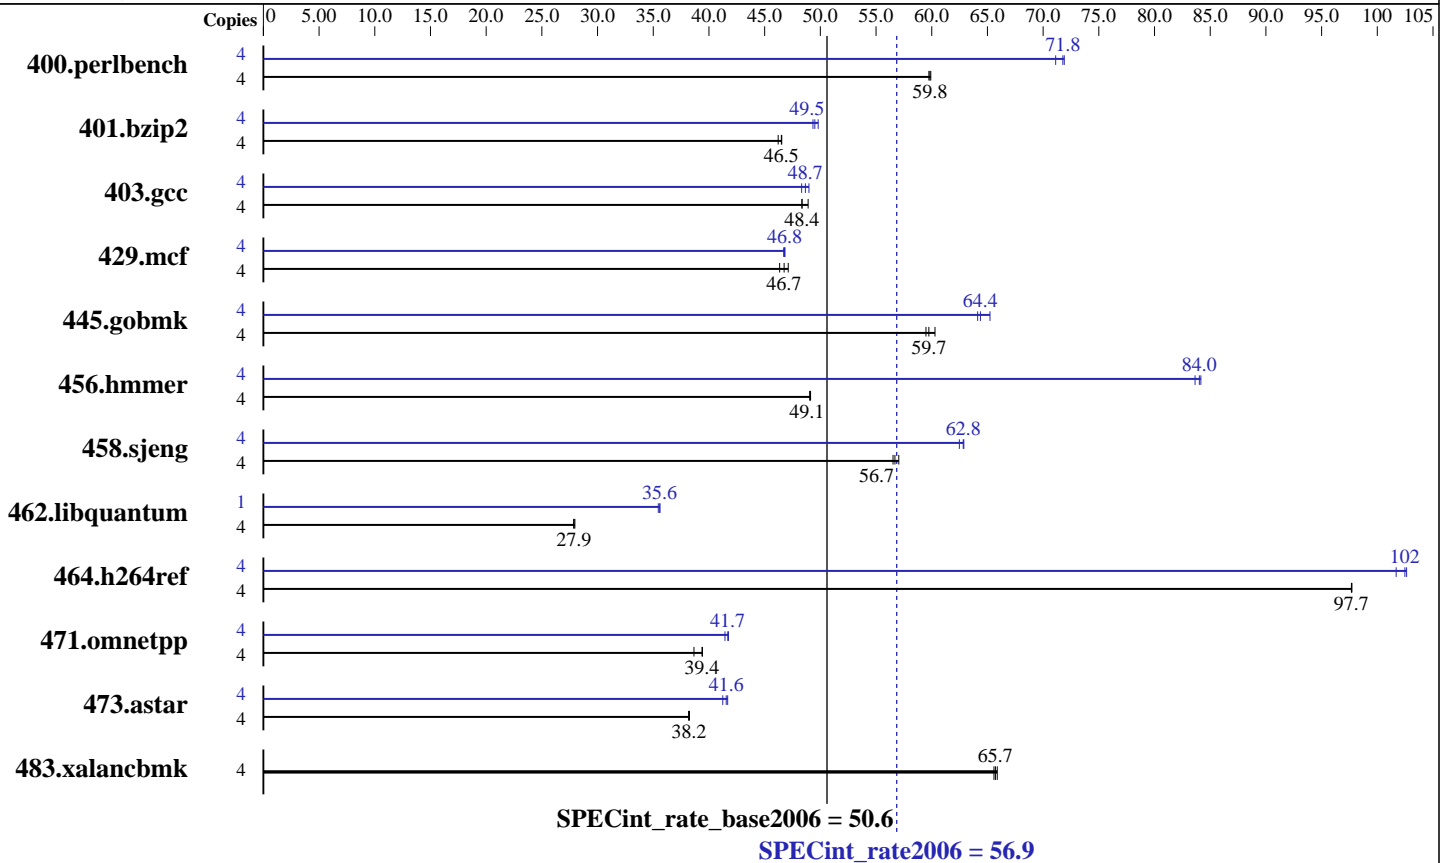

Hardware

CPU Name: Intel Xeon E5410
 CPU Characteristics:
 CPU MHz: 2330
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 12 GB (6 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
 Disk Subsystem: 1 x SCSI, 73GB, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run Level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.17.10.50
 MicroQuill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 56.9

Servidor Itaotec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 50.6

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	654	59.7	652	59.9	653	59.8	4	544	71.9	549	71.1	545	71.8
401.bzip2	4	829	46.5	835	46.2	830	46.5	4	782	49.3	780	49.5	775	49.8
403.gcc	4	666	48.3	658	48.9	666	48.4	4	657	49.0	662	48.7	666	48.3
429.mcf	4	774	47.1	780	46.7	787	46.3	4	781	46.7	780	46.8	779	46.8
445.gobmk	4	702	59.7	705	59.5	696	60.3	4	654	64.1	643	65.2	652	64.4
456.hammer	4	761	49.1	760	49.1	760	49.1	4	444	84.0	446	83.6	443	84.2
458.sjeng	4	854	56.7	856	56.5	848	57.0	4	770	62.8	775	62.5	770	62.9
462.libquantum	4	2976	27.9	2964	28.0	2972	27.9	1	582	35.6	582	35.6	584	35.5
464.h264ref	4	906	97.7	906	97.7	906	97.7	4	870	102	864	102	863	103
471.omnetpp	4	634	39.4	647	38.7	635	39.4	4	603	41.4	600	41.7	599	41.8
473.astar	4	734	38.3	735	38.2	735	38.2	4	674	41.7	676	41.6	681	41.2
483.xalancbmk	4	421	65.6	419	65.9	420	65.7	4	421	65.6	419	65.9	420	65.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors.

Platform Notes

BIOS configuration:
Hardware Prefetch Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 56.9

Servidor Itaotec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 50.6

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

456.hmmmer: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 56.9

Servidor Itautec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 50.6

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 56.9

Servidor Itaotec LX211 (Intel Xeon E5410)

SPECint_rate_base2006 = 50.6

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Mar-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-INT-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-INT-intel64-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 18:30:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.