



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint<sup>®</sup>\_rate2006 = 52.2

ProLiant DL165 G5  
(2.3 GHz AMD Opteron 2356)

SPECint\_rate\_base2006 = 45.5

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

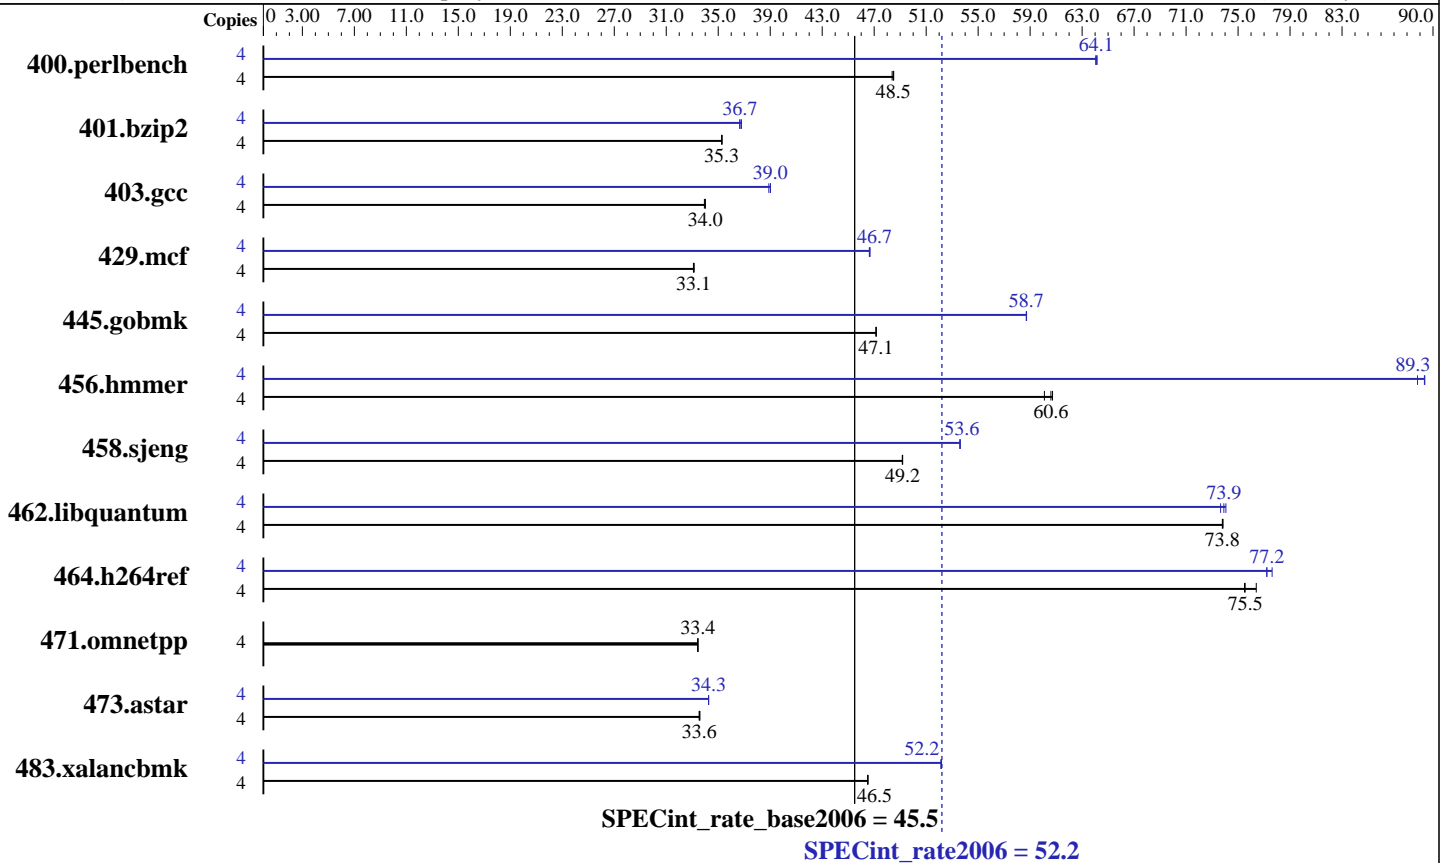

### Hardware

CPU Name: AMD Opteron 2356  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4x4 GB, PC2-5300P CL5)  
 Disk Subsystem: 1x146 GB 10 K SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2, PathScale Compiler Suite, Release Pre-3.2 Beta  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux, binutils-2.18.50



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 52.2

ProLiant DL165 G5  
(2.3 GHz AMD Opteron 2356)

SPECint\_rate\_base2006 = 45.5

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Mar-2008  
Hardware Availability: Mar-2008  
Software Availability: May-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	808	48.4	<b>806</b>	<b>48.5</b>	806	48.5	4	610	64.0	609	64.2	<b>610</b>	<b>64.1</b>
401.bzip2	4	1095	35.3	1094	35.3	<b>1094</b>	<b>35.3</b>	4	1053	36.6	<b>1052</b>	<b>36.7</b>	1049	36.8
403.gcc	4	947	34.0	949	33.9	<b>947</b>	<b>34.0</b>	4	828	38.9	<b>825</b>	<b>39.0</b>	825	39.0
429.mcf	4	1102	33.1	<b>1102</b>	<b>33.1</b>	1100	33.1	4	781	46.7	<b>782</b>	<b>46.7</b>	782	46.6
445.gobmk	4	890	47.2	890	47.1	<b>890</b>	<b>47.1</b>	4	715	58.7	<b>715</b>	<b>58.7</b>	714	58.7
456.hmmer	4	<b>616</b>	<b>60.6</b>	621	60.1	615	60.7	4	<b>418</b>	<b>89.3</b>	420	88.8	418	89.4
458.sjeng	4	<b>984</b>	<b>49.2</b>	984	49.2	984	49.2	4	<b>903</b>	<b>53.6</b>	903	53.6	903	53.6
462.libquantum	4	1122	73.8	<b>1123</b>	<b>73.8</b>	1123	73.8	4	<b>1121</b>	<b>73.9</b>	1119	74.1	1125	73.7
464.h264ref	4	1159	76.4	<b>1172</b>	<b>75.5</b>	1173	75.5	4	<b>1146</b>	<b>77.2</b>	1147	77.2	1140	77.6
471.omnetpp	4	748	33.4	748	33.4	<b>748</b>	<b>33.4</b>	4	748	33.4	748	33.4	<b>748</b>	<b>33.4</b>
473.astar	4	<b>837</b>	<b>33.6</b>	836	33.6	837	33.5	4	<b>820</b>	<b>34.3</b>	820	34.3	820	34.3
483.xalancbmk	4	593	46.5	<b>593</b>	<b>46.5</b>	594	46.5	4	529	52.1	529	52.2	<b>529</b>	<b>52.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 3584.

## Base Compiler Invocation

C benchmarks:  
pgcc  
  
C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 52.2**

ProLiant DL165 G5  
(2.3 GHz AMD Opteron 2356)

**SPECint\_rate\_base2006 = 45.5**

**CPU2006 license:** 3

**Test date:** Mar-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** May-2008

## Base Portability Flags (Continued)

464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 --zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 52.2

ProLiant DL165 G5  
(2.3 GHz AMD Opteron 2356)

SPECint\_rate\_base2006 = 45.5

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

## Peak Portability Flags (Continued)

445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -WOPT:if\_conv=0 -CG:local\_sched\_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4  
 -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64  
 -Bstatic\_pgi

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast  
 -OPT:malloc\_alg=1

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1  
 -Msmartalloc=huge:150 -tp barcelona -Bstatic\_pgi

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed  
 -Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const  
 -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64  
 -Bstatic\_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)  
 -fastsse -Msmartalloc=huge:150 -Mfprelaxed  
 -tp barcelona-64 -Bstatic\_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8  
 -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg  
 -tp barcelona-64 -Bstatic\_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline(pass 2)  
 -Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150  
 -Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 52.2**

ProLiant DL165 G5  
(2.3 GHz AMD Opteron 2356)

**SPECint\_rate\_base2006 = 45.5**

**CPU2006 license:** 3

**Test date:** Mar-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:35:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2008.