



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECfp<sup>®</sup>\_rate2006 = 45.1

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

### SPECfp\_rate\_base2006 = 41.2

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

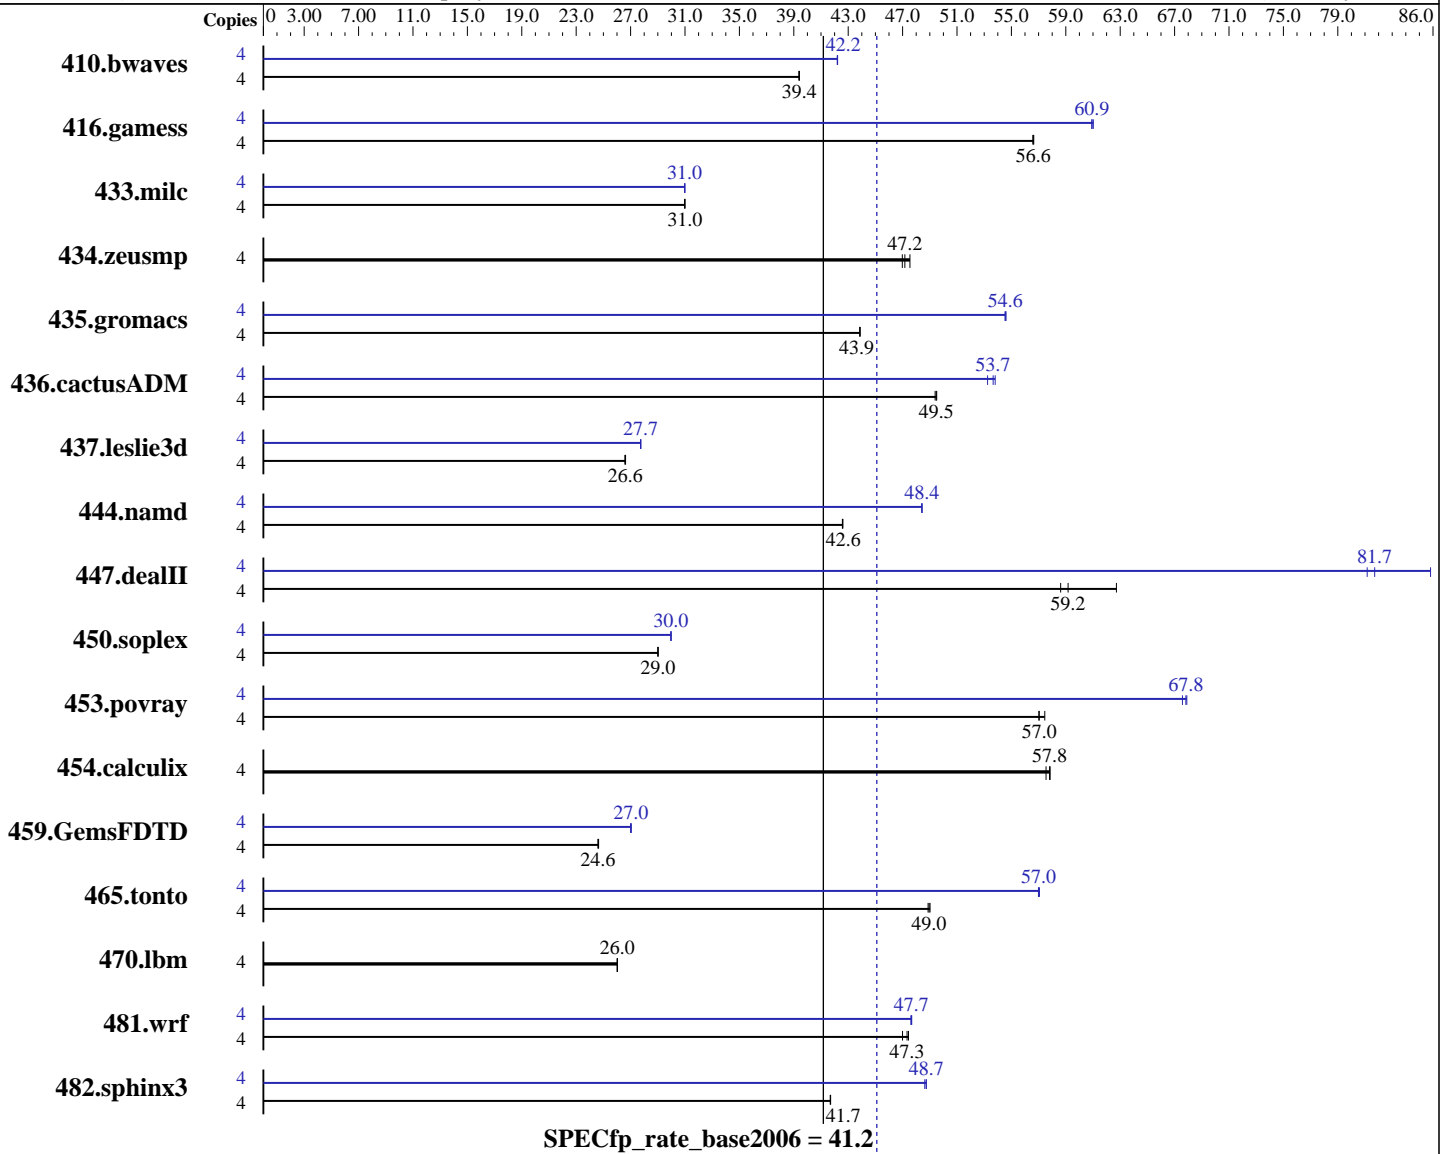

### Hardware

CPU Name: AMD Opteron 2356  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2, PathScale Compiler Suite, Release Pre-3.2 Beta  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 45.1

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

SPECfp\_rate\_base2006 = 41.2

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4x4 GB, PC2-5300P CL5)  
Disk Subsystem: 2x72 GB 15 K SAS  
Other Hardware: None

Other Software: binutils-2.18.50

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1379	39.4	1381	39.4	<u>1379</u>	<u>39.4</u>	4	1287	42.2	<u>1288</u>	<u>42.2</u>	1288	42.2
416.gamess	4	1384	56.6	1383	56.6	<u>1384</u>	<u>56.6</u>	4	1283	61.0	1286	60.9	<u>1285</u>	<u>60.9</u>
433.milc	4	<u>1185</u>	<u>31.0</u>	1185	31.0	1185	31.0	4	<u>1185</u>	<u>31.0</u>	1185	31.0	1185	31.0
434.zeusmp	4	775	47.0	<u>772</u>	<u>47.2</u>	766	47.5	4	775	47.0	<u>772</u>	<u>47.2</u>	766	47.5
435.gromacs	4	<u>651</u>	<u>43.9</u>	651	43.9	651	43.9	4	523	54.6	<u>524</u>	<u>54.6</u>	524	54.5
436.cactusADM	4	<u>966</u>	<u>49.5</u>	968	49.4	965	49.5	4	<u>891</u>	<u>53.7</u>	898	53.2	888	53.8
437.leslie3d	4	1414	26.6	<u>1413</u>	<u>26.6</u>	1412	26.6	4	1355	27.8	<u>1355</u>	<u>27.7</u>	1356	27.7
444.namd	4	<u>753</u>	<u>42.6</u>	754	42.6	753	42.6	4	663	48.4	<u>662</u>	<u>48.4</u>	662	48.4
447.dealII	4	<u>773</u>	<u>59.2</u>	781	58.6	730	62.7	4	533	85.8	564	81.2	<u>560</u>	<u>81.7</u>
450.soplex	4	1150	29.0	<u>1150</u>	<u>29.0</u>	1149	29.0	4	<u>1113</u>	<u>30.0</u>	1113	30.0	1114	30.0
453.povray	4	373	57.0	<u>373</u>	<u>57.0</u>	370	57.5	4	315	67.6	313	67.9	<u>314</u>	<u>67.8</u>
454.calculix	4	570	57.8	573	57.5	<u>571</u>	<u>57.8</u>	4	570	57.8	573	57.5	<u>571</u>	<u>57.8</u>
459.GemsFDTD	4	1725	24.6	1722	24.6	<u>1724</u>	<u>24.6</u>	4	1569	27.0	1572	27.0	<u>1570</u>	<u>27.0</u>
465.tonto	4	805	48.9	803	49.0	<u>804</u>	<u>49.0</u>	4	691	57.0	690	57.1	<u>691</u>	<u>57.0</u>
470.lbm	4	2113	26.0	<u>2111</u>	<u>26.0</u>	2111	26.0	4	2113	26.0	<u>2111</u>	<u>26.0</u>	2111	26.0
481.wrf	4	951	47.0	<u>944</u>	<u>47.3</u>	942	47.4	4	<u>938</u>	<u>47.7</u>	937	47.7	938	47.6
482.sphinx3	4	<u>1870</u>	<u>41.7</u>	1869	41.7	1870	41.7	4	1599	48.7	<u>1600</u>	<u>48.7</u>	1603	48.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 3584.

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

SPECfp\_rate2006 = 45.1

SPECfp\_rate\_base2006 = 41.2

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 --zc\_eh -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 45.1**

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

**SPECfp\_rate\_base2006 = 41.2**

**CPU2006 license:** 3

**Test date:** Mar-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** May-2008

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

482.sphinx3: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 45.1

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

SPECfp\_rate\_base2006 = 41.2

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
-Mipa=shape -tp barcelona-64 -Bstatic_pgi

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -Ofast -LNO:vintr=2
-CG:locs_shallow_depth=1

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
-Munroll=m:8 -tp barcelona-64 -Bstatic_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 45.1

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

SPECfp\_rate\_base2006 = 41.2

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

## Peak Optimization Flags (Continued)

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed  
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: basepeak = yes

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll\_size=256  
-CG:load\_exe=0

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast  
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: basepeak = yes

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -m3dnow -LANG:copyinout=off  
-IPA:callee\_limit=5000

## Peak Other Flags

C benchmarks (except as noted below):

-w

482.sphinx3: No flags used

C++ benchmarks:

444.namd: -w

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

**SPECfp\_rate2006 = 45.1**

**SPECfp\_rate\_base2006 = 41.2**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Mar-2008

**Hardware Availability:** Mar-2008

**Software Availability:** May-2008

## Peak Other Flags (Continued)

410.bwaves: -w

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:25:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2008.