



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 13.8

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_base2006 = 12.3

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

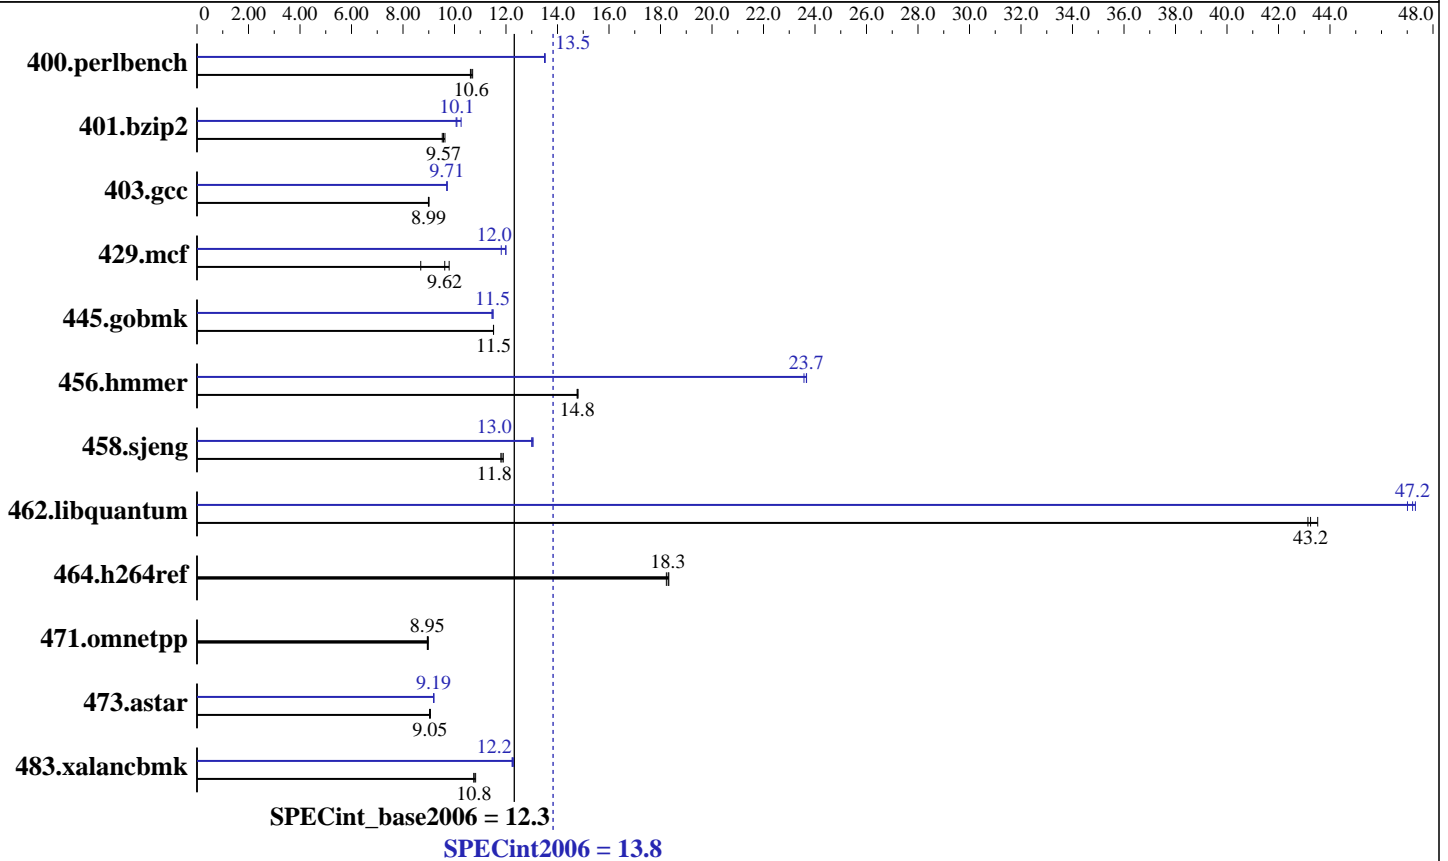

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4 GB, PC2-5300P CL5)
 Disk Subsystem: 1x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux binutils-2.18.50



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **13.8**

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_base2006 = **12.3**

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	920	10.6	918	10.6	913	10.7	723	13.5	724	13.5	723	13.5
401.bzip2	1002	9.63	1013	9.53	1008	9.57	941	10.3	959	10.1	956	10.1
403.gcc	896	8.99	895	8.99	893	9.01	830	9.70	829	9.71	829	9.71
429.mcf	1050	8.69	948	9.62	931	9.79	772	11.8	760	12.0	760	12.0
445.gobmk	911	11.5	911	11.5	911	11.5	912	11.5	916	11.5	913	11.5
456.hammer	630	14.8	632	14.8	632	14.8	396	23.6	394	23.7	394	23.7
458.sjeng	1022	11.8	1017	11.9	1025	11.8	929	13.0	931	13.0	927	13.1
462.libquantum	480	43.1	476	43.5	479	43.2	438	47.3	441	47.0	439	47.2
464.h264ref	1210	18.3	1214	18.2	1208	18.3	1210	18.3	1214	18.2	1208	18.3
471.omnetpp	699	8.95	698	8.95	696	8.98	699	8.95	698	8.95	696	8.98
473.astar	776	9.05	774	9.06	777	9.03	763	9.20	764	9.19	764	9.19
483.xalancbmk	641	10.8	642	10.8	638	10.8	562	12.3	564	12.2	564	12.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 14336.

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 13.8

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_base2006 = 12.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Portability Flags (Continued)

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32
-Mconcur=innermost -Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsxe -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32
-Msmartalloc=huge:896 --zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 13.8

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_base2006 = 12.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:8(pass 2)
-Mipa=inline(pass 2) -fast -O4 -Mfprelaxed
-Msmartalloc=huge:896 -Mnounroll -Mnovect -tp barcelona-64
-Bstatic_pgi

401.bzip2: -Mpfi(pass 1) -Mconcur=innermost(pass 2) -Mpfo(pass 2)
-fast -O4 -Msmartalloc=huge:896 -Mnounroll
-tp barcelona-64 -Bstatic_pgi

403.gcc: -Mpfi(pass 1) -Mpfo(pass 2) -Mconcur(pass 2)
-Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Mfprelaxed
-Msmartalloc=huge:896 -tp barcelona -Bstatic_pgi

429.mcf: -fastsse -Mconcur -Mipa=jobs:8 -Mipa=fast -Mipa=inline:1
-Msmartalloc=huge:896 -Mloop32 -tp barcelona -Bstatic_pgi

445.gobmk: -Mpfi(pass 1) -Mpfo(pass 2) -Mconcur(pass 2)
-Mipa=jobs:8(pass 2) -Mipa=fast(pass 2) -fast -O4
-Msmartalloc=huge:896 -Mfprelaxed -Mnovect
-tp barcelona-64 -Bstatic_pgi

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:896 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=jobs:8 -Mipa=const
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
-Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mconcur(pass 2)
-Mpfo(pass 2) -fastsse -Msmartalloc=huge:896 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc -Mvect=nosse
-Munroll=m:8 -Mconcur=innermost -Mconcur=noaltcode
-Mipa=jobs:8 -Mipa=fast -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 13.8

ProLiant DL585 G5
(2.3 GHz AMD Opteron 8356)

SPECint_base2006 = 12.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -O4
-Msmartalloc=huge:896 -Mfprelaxed -Mloop32 --zc_eh
-tp barcelona -Bstatic_pgi

483.xalancbmk: -fastsse -O4 -Mipa=jobs:8 -Mipa=fast -Mipa=inline
-Mfprelaxed -Msmartalloc -Mloop32 --zc_eh -tp barcelona
-Bstatic_pgi
-L/proj/qa/smartheap/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:37:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.