



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS


NovaScale R460 E1
(Intel Xeon E5205, 1.86GHz)

SPECint®2006 = 16.6

SPECint_base2006 = 14.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

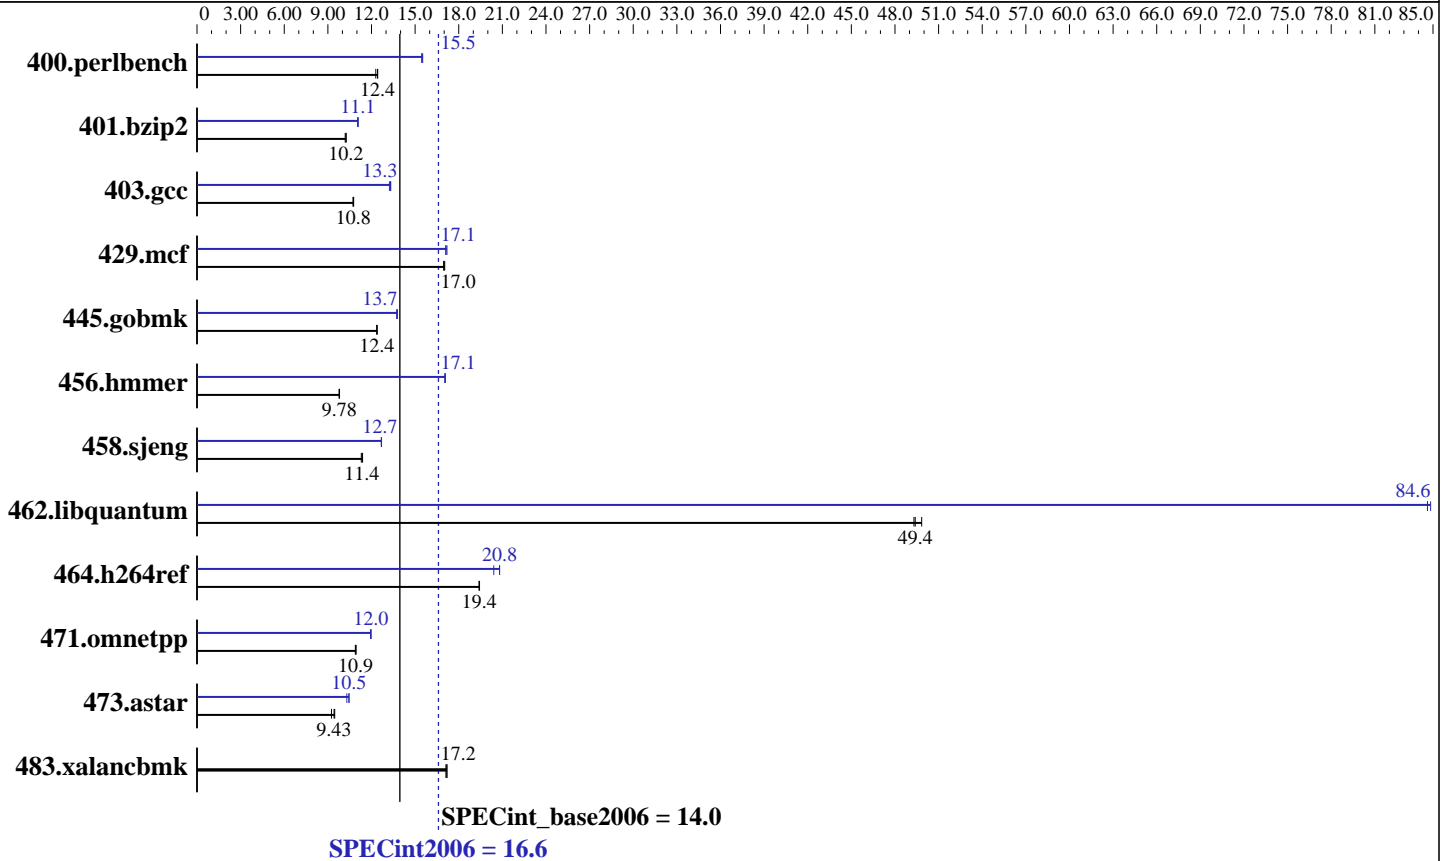

Hardware

CPU Name: Intel Xeon E5205
 CPU Characteristics: 1.86 GHz, 6 MB L2, 1066 MHz bus
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x73.2 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: L_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5205,1.86GHz)

SPECint2006 = 16.6

SPECint_base2006 = 14.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	787	12.4	787	12.4	795	12.3	629	15.5	632	15.5	632	15.5
401.bzip2	947	10.2	941	10.3	942	10.2	871	11.1	874	11.0	872	11.1
403.gcc	751	10.7	748	10.8	747	10.8	604	13.3	608	13.2	605	13.3
429.mcf	538	17.0	537	17.0	535	17.0	533	17.1	533	17.1	531	17.2
445.gobmk	847	12.4	848	12.4	847	12.4	763	13.7	761	13.8	763	13.7
456.hmmer	954	9.78	952	9.80	954	9.78	547	17.1	547	17.1	546	17.1
458.sjeng	1071	11.3	1066	11.4	1063	11.4	954	12.7	953	12.7	955	12.7
462.libquantum	419	49.4	420	49.3	416	49.8	245	84.6	244	84.8	245	84.6
464.h264ref	1139	19.4	1141	19.4	1139	19.4	1084	20.4	1064	20.8	1064	20.8
471.omnetpp	574	10.9	572	10.9	571	10.9	523	12.0	522	12.0	524	11.9
473.astar	759	9.25	741	9.47	745	9.43	681	10.3	672	10.5	672	10.5
483.xalancbmk	402	17.2	402	17.2	403	17.1	402	17.2	402	17.2	403	17.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores

Platform Notes

Bios settings:
Intel SpeedStep Technology: Disabled

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

The NEC Express5800/120Rh-1(Intel Xeon Processor E5205),
the NEC Express5800/120Rj-2(Intel Xeon Processor E5205),
the Bull NovaScale R440 E1 (Intel Xeon E5205,1.86GHz) and
the Bull NovaScale R460 E1 (Intel Xeon E5205,1.86GHz) models are electronically equivalent.
The results have been measured on a NEC Express5800/120Rj-2(Intel Xeon Processor E5205) model.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5205, 1.86GHz)

SPECint2006 = 16.6

SPECint_base2006 = 14.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmarheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5205, 1.86GHz)

SPECint2006 = 16.6

SPECint_base2006 = 14.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
-auto-ilp32
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5205,1.86GHz)

SPECint2006 = 16.6

SPECint_base2006 = 14.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:01:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 April 2008.