



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 80.5

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECfp_rate_base2006 = 71.4

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Feb-2008

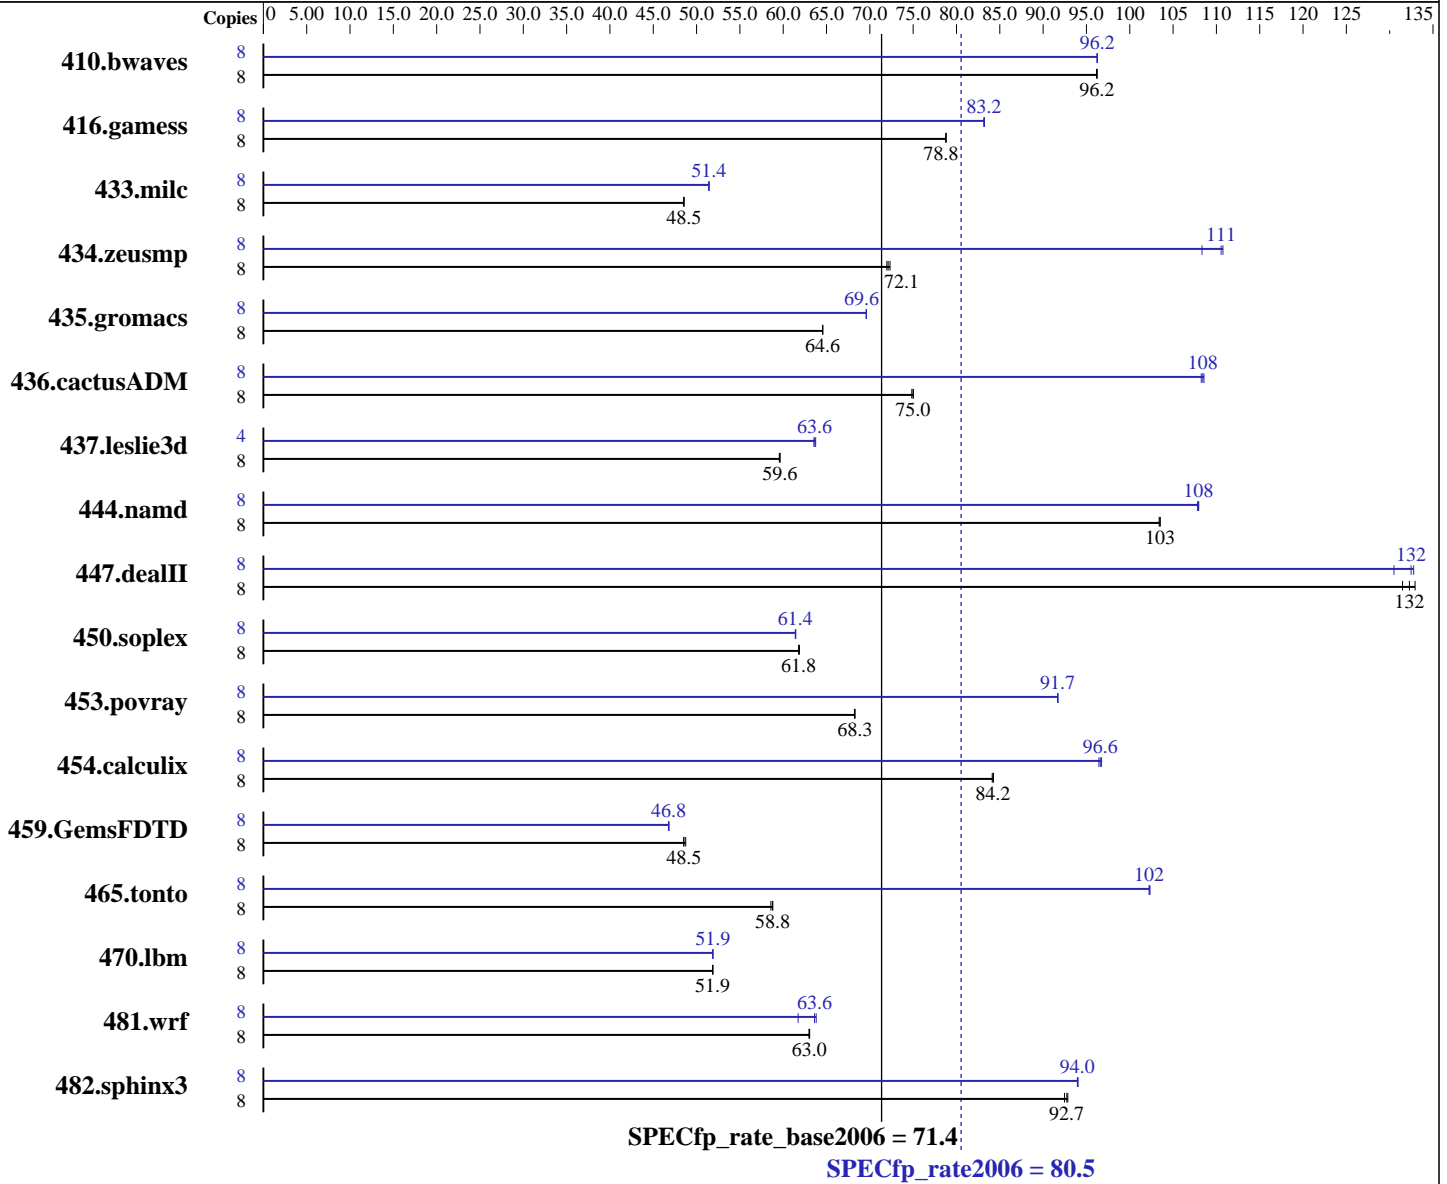

Hardware

CPU Name: POWER6
 CPU Characteristics: 4200
 CPU MHz: Integrated
 FPU: 4 cores, 2 chips, 2 cores/chip, 2 threads/core
 CPU(s) enabled: 2,4 cores
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 4 MB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: IBM AIX V6.1 Updated to SP3
 Compiler: XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF.
 XL Fortran Enterprise Edition V11.1 for AIX Updated with the Oct2007 PTF.
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = **80.5**

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECfp_rate_base2006 = **71.4**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Feb-2008

L3 Cache: None
Other Cache: None
Memory: 32 GB (8x4 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB SAS 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: --

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1130	96.2	1130	96.2	1131	96.2	8	1130	96.2	1130	96.2	1130	96.2
416.gamess	8	1988	78.8	1989	78.8	1988	78.8	8	1883	83.2	1884	83.2	1882	83.2
433.milc	8	1513	48.5	1513	48.5	1513	48.5	8	1428	51.4	1427	51.4	1428	51.4
434.zeusmp	8	1010	72.1	1012	72.0	1006	72.3	8	672	108	659	111	657	111
435.gromacs	8	885	64.6	885	64.6	885	64.6	8	821	69.6	821	69.6	821	69.6
436.cactusADM	8	1274	75.0	1275	75.0	1277	74.8	8	882	108	881	109	883	108
437.leslie3d	8	1261	59.6	1261	59.6	1263	59.6	4	590	63.7	592	63.5	591	63.6
444.namd	8	621	103	620	103	620	104	8	594	108	595	108	594	108
447.dealII	8	696	131	688	133	692	132	8	691	132	689	133	701	130
450.soplex	8	1078	61.9	1080	61.8	1080	61.8	8	1087	61.4	1086	61.5	1086	61.4
453.povray	8	623	68.3	624	68.2	623	68.3	8	464	91.7	464	91.7	464	91.7
454.calculix	8	783	84.3	784	84.2	785	84.1	8	684	96.4	683	96.6	682	96.7
459.GemsFDTD	8	1749	48.5	1749	48.5	1741	48.7	8	1813	46.8	1815	46.8	1815	46.8
465.tonto	8	1339	58.8	1339	58.8	1344	58.6	8	770	102	769	102	770	102
470.lbm	8	2119	51.9	2119	51.9	2119	51.9	8	2119	51.9	2119	51.9	2119	51.9
481.wrf	8	1418	63.0	1417	63.1	1419	63.0	8	1448	61.7	1400	63.8	1405	63.6
482.sphinx3	8	1686	92.5	1679	92.8	1681	92.7	8	1659	94.0	1658	94.0	1659	94.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

See flags file of details on following settings.

all ulimits set to unlimited.

Environment variables set before executing benchmarks:

MALLOCOPTIONS=pool

MEMORY_AFFINITY=MCM

XLFRTEOPTS=intrinthds=1

System set to "Enhanced" mode when defining partition on HMC.

bindprocessor command used on submit to bind each copy to a unique processor.

1000 16M large pages defined with vmo command

Remote console disabled in /etc/inittab.

fdpr binary optimization tool used for:

410.bwaves 433.milc 435.gromacs 436.cactusADM

453.povray 470.lbm 482.sphinx3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 80.5

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECfp_rate_base2006 = 71.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Feb-2008

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE

482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all

-D__IBM_FAST_VECTOR -blpdata

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap

-qalias=nostd -blpdata

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS

-qsmallstack=dynlenonheap -qalias=nostd -blpdata



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 80.5

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECfp_rate_base2006 = 71.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2008
Hardware Availability: Mar-2008
Software Availability: Feb-2008

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 80.5

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECfp_rate_base2006 = 71.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Feb-2008

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -qfdpr -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -qfdpr -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS

447.dealIII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -qenablevmx -qvecnv1 -qstrict -D_ILS_MACROS
-blpdata

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -qalign=natural -qfdpr -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qalias=nostd

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1
-qxf90=nosignedzero -blpdata

437.leslie3d: -O4 -qlargepage -q64 -blpdata

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -q64 -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -qfdpr -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1
-qfdpr -qnostrict -D_ILS_MACROS -blpdata

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 80.5

Bull Escala PL460 (4.2 GHz, 4 cores)

SPECfp_rate_base2006 = 71.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Feb-2008

Peak Optimization Flags (Continued)

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -blpdata

481.wrf: -bmaxdata:0x30000000 -O5 -qlargepage -qalias=nostd
-D_ILS_MACROS -blpdata

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:21:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.