



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint[®]_rate2006 = 63.1

Servidor Itaotec MX221 (Intel Xeon E5410)

SPECint_rate_base2006 = 53.0

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: Apr-2008

Hardware Availability: Dec-2007

Software Availability: Jan-2008

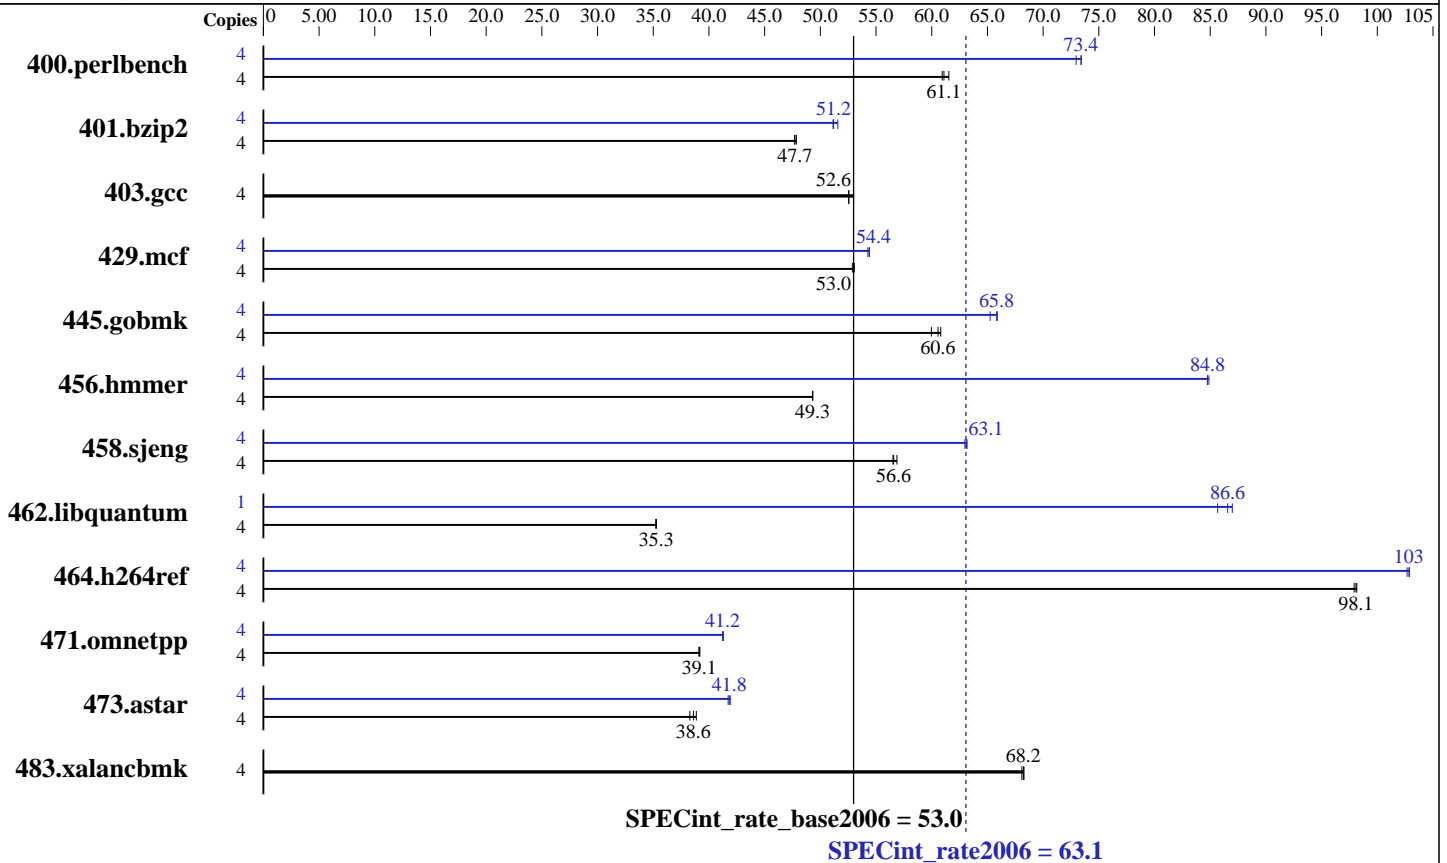

Hardware

CPU Name: Intel Xeon E5410
 CPU Characteristics:
 CPU MHz: 2330
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
 Disk Subsystem: 1 x SCSI, 73GB, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run Level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.17.10.50
 MicroQuill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 63.1

Servidor Itautec MX221 (Intel Xeon E5410)

SPECint_rate_base2006 = 53.0

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	641	60.9	640	61.1	635	61.5	4	532	73.4	536	73.0	532	73.4
401.bzip2	4	809	47.7	809	47.7	807	47.8	4	755	51.1	749	51.6	754	51.2
403.gcc	4	608	53.0	613	52.5	613	52.6	4	608	53.0	613	52.5	613	52.6
429.mcf	4	688	53.0	689	53.0	690	52.9	4	672	54.3	671	54.4	670	54.4
445.gobmk	4	690	60.8	693	60.6	700	60.0	4	643	65.2	637	65.8	637	65.9
456.hammer	4	757	49.3	757	49.3	757	49.3	4	440	84.7	440	84.8	440	84.9
458.sjeng	4	856	56.5	851	56.9	855	56.6	4	767	63.1	769	63.0	766	63.2
462.libquantum	4	2350	35.3	2350	35.3	2352	35.2	1	242	85.7	239	86.6	238	87.0
464.h264ref	4	904	97.9	902	98.2	902	98.1	4	862	103	861	103	860	103
471.omnetpp	4	638	39.2	639	39.1	639	39.1	4	605	41.3	606	41.2	606	41.2
473.astar	4	727	38.6	722	38.9	733	38.3	4	673	41.7	671	41.8	670	41.9
483.xalancbmk	4	405	68.2	404	68.3	405	68.1	4	405	68.2	404	68.3	405	68.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 462.libquantum at peak.

Platform Notes

BIOS configuration:
Hardware Prefetch Enabled

General Notes

This result was measured on the Servidor Itautec MX201.
The Servidor Itautec MX221 and the Servidor Itautec MX201 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 63.1

Servidor Itaotec MX221 (Intel Xeon E5410)

SPECint_rate_base2006 = 53.0

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3
C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc
401.bzip2: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include
456.hmmer: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include
C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 63.1

Servidor Itaotec MX221 (Intel Xeon E5410)

SPECint_rate_base2006 = 53.0

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
403.gcc: basepeak = yes
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmarheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 63.1

Servidor Itautec MX221 (Intel Xeon E5410)

SPECint_rate_base2006 = 53.0

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 16:49:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 April 2008.