SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX201 (Intel Xeon X5450)

SPECint®_rate2006 = 134

SPECint_rate_base2006 = 109

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

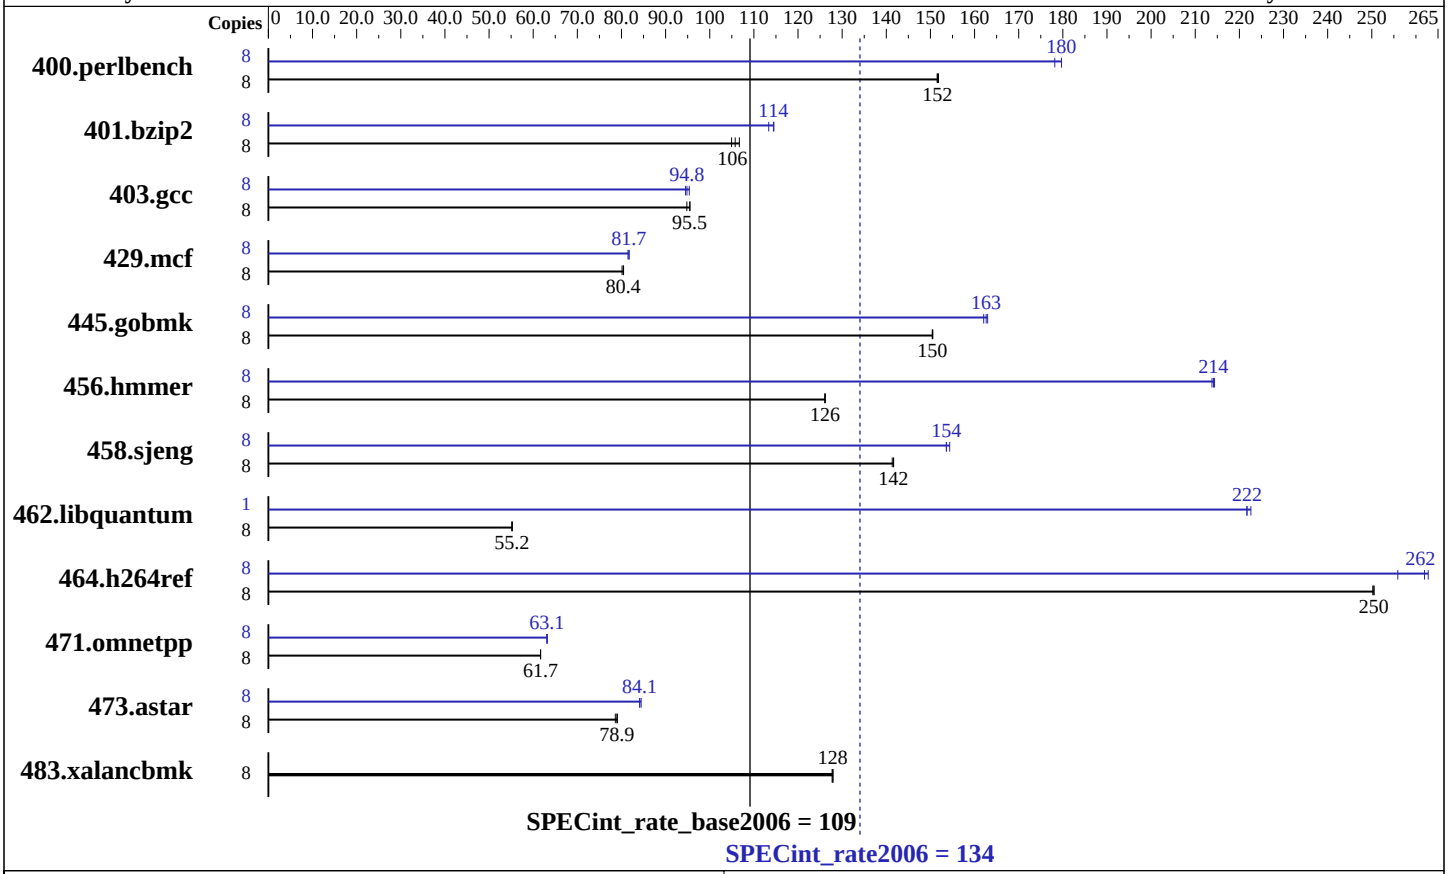

Hardware

CPU Name:	Intel Xeon X5450
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem:	1 x SCSI, 73GB, 15000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run Level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.17.10.50 MicroQuill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX201 (Intel Xeon X5450)

SPECint_rate2006 = 134

SPECint_rate_base2006 = 109

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	516	152	**515**	**152**	515	152	8	**435**	**180**	439	178	435	180
401.bzip2	8	736	105	723	107	**730**	**106**	8	**675**	**114**	674	115	681	113
403.gcc	8	**675**	**95.5**	679	94.8	674	95.5	8	681	94.5	**679**	**94.8**	675	95.4
429.mcf	8	907	80.5	910	80.1	**907**	**80.4**	8	893	81.7	**893**	**81.7**	895	81.5
445.gobmk	8	558	150	**558**	**150**	557	151	8	**516**	**163**	518	162	515	163
456.hmmer	8	592	126	**592**	**126**	592	126	8	349	214	**349**	**214**	348	214
458.sjeng	8	683	142	685	141	**683**	**142**	8	**630**	**154**	630	154	627	154
462.libquantum	8	3005	55.2	**3001**	**55.2**	3001	55.2	1	93.5	222	**93.4**	**222**	93.1	223
464.h264ref	8	708	250	707	250	**707**	**250**	8	674	263	692	256	**676**	**262**
471.omnetpp	8	811	61.7	811	61.7	**811**	**61.7**	8	792	63.1	**792**	**63.1**	791	63.2
473.astar	8	710	79.1	714	78.6	**711**	**78.9**	8	**668**	**84.1**	668	84.1	665	84.5
483.xalancbmk	8	**432**	**128**	432	128	432	128	8	**432**	**128**	432	128	432	128

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processor, except for 462.libquantum at peak.
```

Platform Notes

```
BIOS configuration:
Hardware Prefetch Enabled
```

General Notes

```
This result was measured on the Servidor Itautec MX201.
The Servidor Itautec MX201 and the Servidor Itautec MX221 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:

```
icc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

456.hmmer: /opt/intel/cce/10.1.012/bin/icc
-L/opt/intel/cce/10.1.012/lib
-I/opt/intel/cce/10.1.012/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-INT-intel64-linux-flags.20090714.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 17:00:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 May 2008.