



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/320Fc-MR  
(Intel Xeon X5355)

SPECfp<sup>®</sup>\_rate2006 = 58.3

SPECfp\_rate\_base2006 = 53.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Oct-2007

Software Availability: Feb-2008

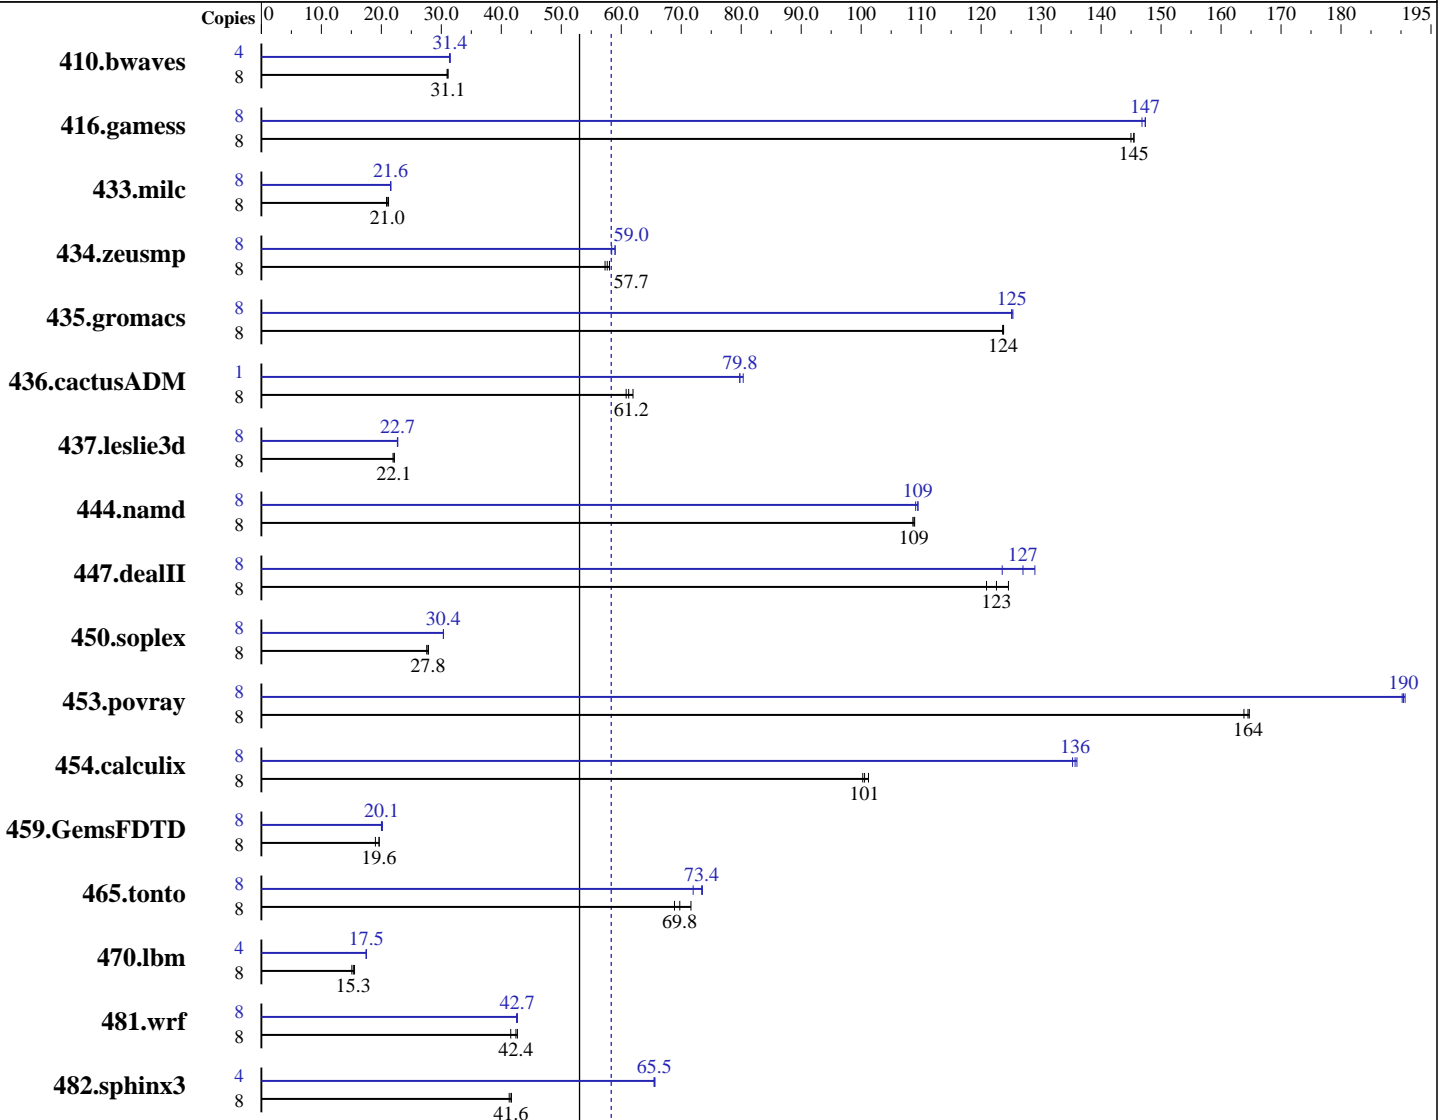

SPECfp\_rate2006 = 58.3

SPECfp\_rate\_base2006 = 53.0

### Hardware

CPU Name: Intel Xeon X5355  
 CPU Characteristics: 2.66 GHz, 2x4 MB L2 shared, 1333 MHz bus  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux AS release 4 (Nahant Update 5), Kernel 2.6.9-55.0.12.ELsmp on an X86\_64  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/320Fc-MR  
(Intel Xeon X5355)

SPECfp\_rate2006 = 58.3

SPECfp\_rate\_base2006 = 53.0

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Apr-2008  
Hardware Availability: Oct-2007  
Software Availability: Feb-2008

L3 Cache: None  
Other Cache: None  
Memory: 12 GB (6x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 2x73.2 GB SAS, 15000RPM, Software RAID Level1  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.tar.gz, Version 2.17  
ft Server Control Software 5.0-0231

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3494	31.1	<b>3497</b>	<b>31.1</b>	3512	31.0	4	1733	31.4	<b>1730</b>	<b>31.4</b>	1726	31.5
416.gamess	8	1077	145	<b>1077</b>	<b>145</b>	1080	145	8	1067	147	1063	147	<b>1063</b>	<b>147</b>
433.milc	8	<b>3501</b>	<b>21.0</b>	3521	20.9	3464	21.2	8	3403	21.6	<b>3407</b>	<b>21.6</b>	3409	21.5
434.zeusmp	8	<b>1263</b>	<b>57.7</b>	1271	57.3	1254	58.0	8	1246	58.4	<b>1235</b>	<b>59.0</b>	1234	59.0
435.gromacs	8	462	124	<b>462</b>	<b>124</b>	462	124	8	457	125	456	125	<b>457</b>	<b>125</b>
436.cactusADM	8	<b>1561</b>	<b>61.2</b>	1572	60.8	1543	62.0	1	149	80.3	150	79.8	<b>150</b>	<b>79.8</b>
437.leslie3d	8	<b>3398</b>	<b>22.1</b>	3426	22.0	3392	22.2	8	3316	22.7	3309	22.7	<b>3310</b>	<b>22.7</b>
444.namd	8	<b>590</b>	<b>109</b>	589	109	591	109	8	<b>586</b>	<b>109</b>	586	109	588	109
447.dealII	8	757	121	<b>747</b>	<b>123</b>	735	125	8	710	129	741	124	<b>721</b>	<b>127</b>
450.soplex	8	<b>2402</b>	<b>27.8</b>	2421	27.6	2395	27.9	8	2199	30.3	<b>2198</b>	<b>30.4</b>	2197	30.4
453.povray	8	260	164	<b>259</b>	<b>164</b>	258	165	8	224	190	<b>224</b>	<b>190</b>	223	191
454.calculix	8	652	101	<b>656</b>	<b>101</b>	658	100	8	<b>486</b>	<b>136</b>	485	136	488	135
459.GemsFDTD	8	4465	19.0	<b>4327</b>	<b>19.6</b>	4322	19.6	8	4206	20.2	<b>4231</b>	<b>20.1</b>	4241	20.0
465.tonto	8	1099	71.6	1143	68.9	<b>1128</b>	<b>69.8</b>	8	1094	72.0	<b>1072</b>	<b>73.4</b>	1071	73.5
470.lbm	8	7288	15.1	<b>7167</b>	<b>15.3</b>	7077	15.5	4	<b>3142</b>	<b>17.5</b>	3145	17.5	3140	17.5
481.wrf	8	2149	41.6	<b>2106</b>	<b>42.4</b>	2093	42.7	8	<b>2094</b>	<b>42.7</b>	2094	42.7	2100	42.5
482.sphinx3	8	3774	41.3	<b>3747</b>	<b>41.6</b>	3741	41.7	4	1191	65.5	<b>1190</b>	<b>65.5</b>	1188	65.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs  
OMP\_NUM\_THREADS set to number of cores

## Platform Notes

This Express5800/320Fc-MR is a fault-tolerant server.  
Two modules are installed in this server and each module has "2CPU chips,12GB memory",  
so total "4CPU chips,24GB memory" are on this server.  
With lockstep technology, these two modules communicate each other  
and handle the same instructions at the same time,  
then logically the "CPU,Memory" is recognized as "2CPU chips,12GB memory" by the OS.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/320Fc-MR  
(Intel Xeon X5355)

**SPECfp\_rate2006 = 58.3**

**SPECfp\_rate\_base2006 = 53.0**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Apr-2008  
**Hardware Availability:** Oct-2007  
**Software Availability:** Feb-2008

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

The NEC Express5800/320Fc-MR(Intel Xeon X5355) and the Bull NovaScale R630 (Intel Xeon X5355,2.66GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/320Fc-MR(Intel Xeon X5355) model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/320Fc-MR  
(Intel Xeon X5355)

**SPECfp\_rate2006 = 58.3**

**SPECfp\_rate\_base2006 = 53.0**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Oct-2007

**Software Availability:** Feb-2008

## Base Optimization Flags (Continued)

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/320Fc-MR  
(Intel Xeon X5355)

**SPECfp\_rate2006 = 58.3**

**SPECfp\_rate\_base2006 = 53.0**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Oct-2007

**Software Availability:** Feb-2008

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/320Fc-MR  
(Intel Xeon X5355)

**SPECfp\_rate2006 = 58.3**

**SPECfp\_rate\_base2006 = 53.0**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2008

**Hardware Availability:** Oct-2007

**Software Availability:** Feb-2008

## Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:30:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 June 2008.