



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Fire X4440

SPECfp®_rate2006 = 151

SPECfp_rate_base2006 = 139

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

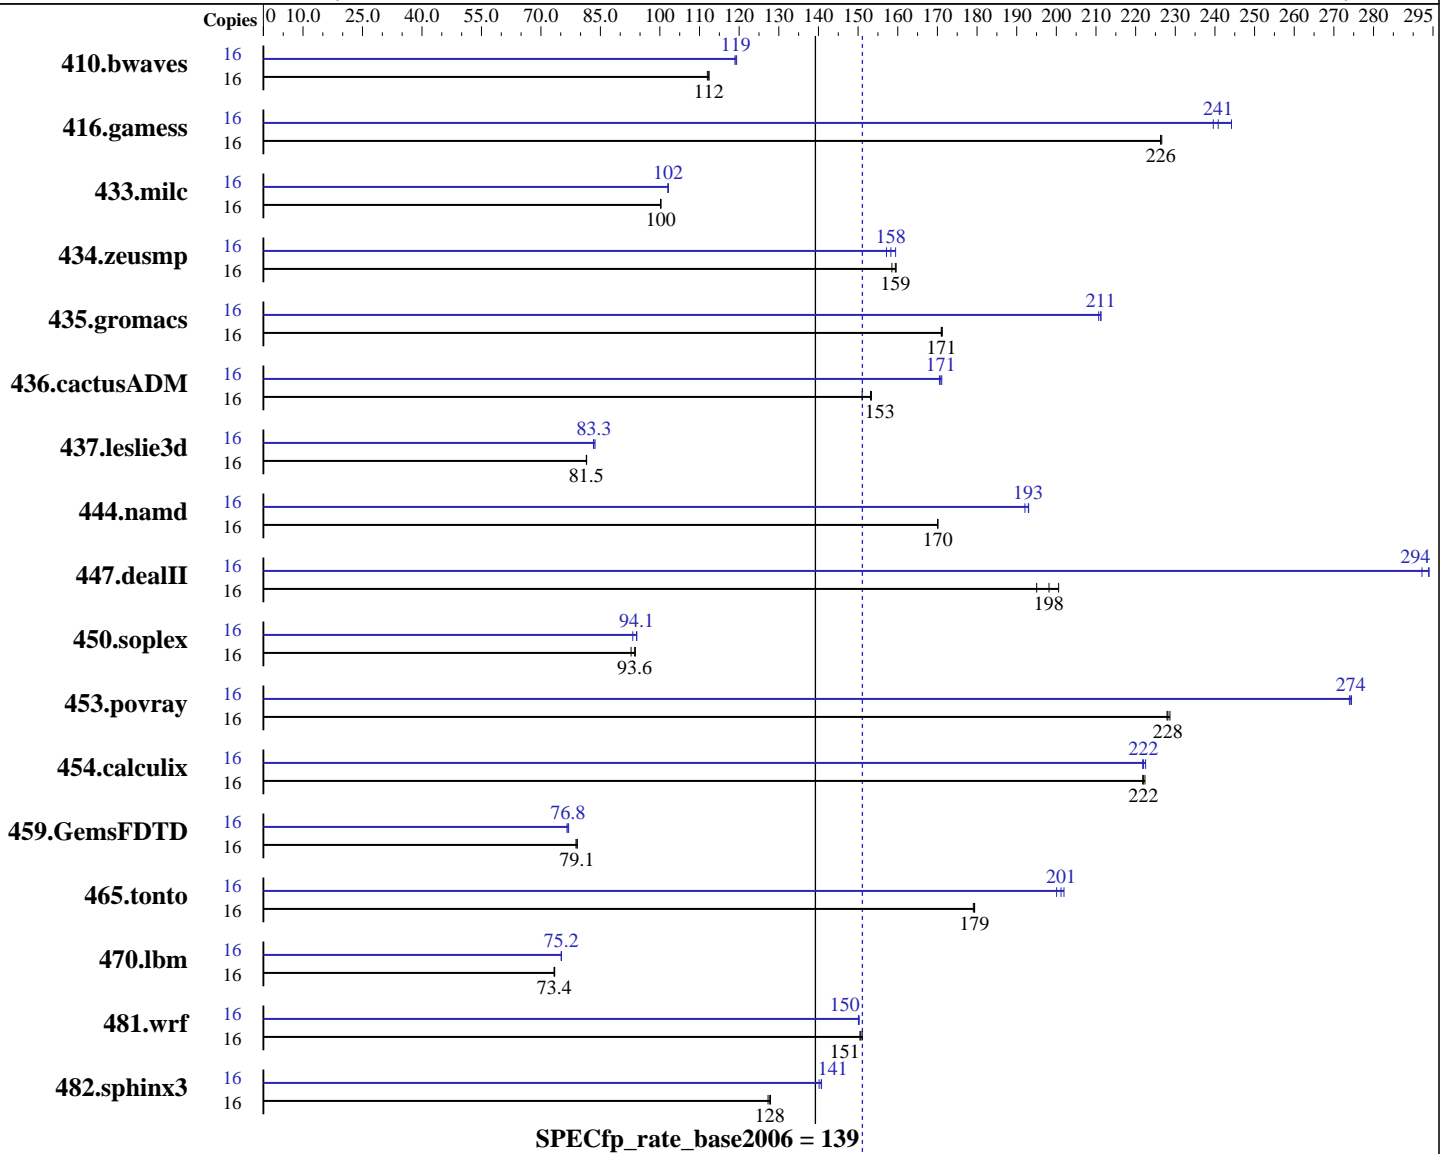

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ext3
 System State: Runlevel 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4440

SPECfp_rate2006 = 151
SPECfp_rate_base2006 = 139

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: SAS, 72 GB, 10 K RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1942	112	1935	112	<u>1936</u>	<u>112</u>	16	1828	119	<u>1824</u>	<u>119</u>	1822	119
416.gamess	16	1383	227	1384	226	<u>1384</u>	<u>226</u>	16	1283	244	1308	240	<u>1301</u>	<u>241</u>
433.milc	16	<u>1466</u>	<u>100</u>	1466	100	1465	100	16	1440	102	<u>1438</u>	<u>102</u>	1438	102
434.zeusmp	16	918	159	912	160	<u>913</u>	<u>159</u>	16	<u>920</u>	<u>158</u>	926	157	913	159
435.gromacs	16	668	171	<u>668</u>	<u>171</u>	667	171	16	<u>541</u>	<u>211</u>	541	211	542	211
436.cactusADM	16	<u>1249</u>	<u>153</u>	1247	153	1266	151	16	1121	171	1117	171	<u>1119</u>	<u>171</u>
437.leslie3d	16	<u>1846</u>	<u>81.5</u>	1846	81.5	1845	81.5	16	1798	83.7	<u>1804</u>	<u>83.3</u>	1806	83.3
444.namd	16	<u>754</u>	<u>170</u>	754	170	755	170	16	668	192	665	193	<u>665</u>	<u>193</u>
447.dealII	16	938	195	<u>924</u>	<u>198</u>	913	201	16	623	294	<u>623</u>	<u>294</u>	626	292
450.soplex	16	1439	92.7	<u>1425</u>	<u>93.6</u>	1422	93.8	16	1432	93.2	<u>1418</u>	<u>94.1</u>	1417	94.2
453.povray	16	373	228	<u>373</u>	<u>228</u>	372	229	16	<u>310</u>	<u>274</u>	311	274	310	274
454.calculix	16	594	222	595	222	<u>595</u>	<u>222</u>	16	<u>595</u>	<u>222</u>	595	222	593	223
459.GemsFDTD	16	<u>2146</u>	<u>79.1</u>	2153	78.9	2145	79.1	16	2217	76.6	<u>2210</u>	<u>76.8</u>	2205	77.0
465.tonto	16	878	179	<u>878</u>	<u>179</u>	879	179	16	<u>783</u>	<u>201</u>	780	202	787	200
470.lbm	16	2997	73.3	2992	73.5	<u>2996</u>	<u>73.4</u>	16	<u>2924</u>	<u>75.2</u>	2924	75.2	2927	75.1
481.wrf	16	<u>1186</u>	<u>151</u>	1183	151	1188	150	16	1191	150	1189	150	<u>1190</u>	<u>150</u>
482.sphinx3	16	2450	127	2438	128	<u>2442</u>	<u>128</u>	16	2225	140	<u>2216</u>	<u>141</u>	2215	141

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 4915200' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=2400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

Default BIOS settings were used.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4440

SPECfp_rate2006 = 151
SPECfp_rate_base2006 = 139

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Base Compiler Invocation

C benchmarks:
pgcc
C++ benchmarks:
pgcpp
Fortran benchmarks:
pgf95
Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
C++ benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi
Fortran benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4440

SPECfp_rate2006 = 151

SPECfp_rate_base2006 = 139

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-w
```

C++ benchmarks:

```
-w
```

Fortran benchmarks:

```
-w
```

Benchmarks using both Fortran and C:

```
-w
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
pathcc
```

```
433.milc: pgcc
```

C++ benchmarks (except as noted below):

```
pathCC
```

```
444.namd: pgcpp
```

Fortran benchmarks (except as noted below):

```
pathf95
```

```
410.bwaves: pgf95
```

```
434.zeusmp: pgf95
```

Benchmarks using both Fortran and C (except as noted below):

```
pgcc pgf95
```

```
436.cactusADM: pathcc pathf95
```

```
481.wrf: pathcc pathf95
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4440

SPECfp_rate2006 = 151
SPECfp_rate_base2006 = 139

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
-Mipa=shape -tp barcelona-64 -Bstatic_pgi
```

```
470.lbm: -march=barcelona -Ofast -m3dnow
```

```
482.sphinx3: -march=barcelona -Ofast
```

C++ benchmarks:

```
444.namd: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
-Munroll=m:8 -tp barcelona-64 -Bstatic_pgi
```

```
447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0
```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4440

SPECfp_rate2006 = 151
SPECfp_rate_base2006 = 139

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Optimization Flags (Continued)

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnw -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnw
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4440

SPECfp_rate2006 = 151

SPECfp_rate_base2006 = 139

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Other Flags (Continued)

Fortran benchmarks:

410.bwaves: -w

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:25:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.