



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems Sun Fire X4600 M2

SPECint<sup>®</sup>\_rate2006 = 180

SPECint\_rate\_base2006 = 156

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

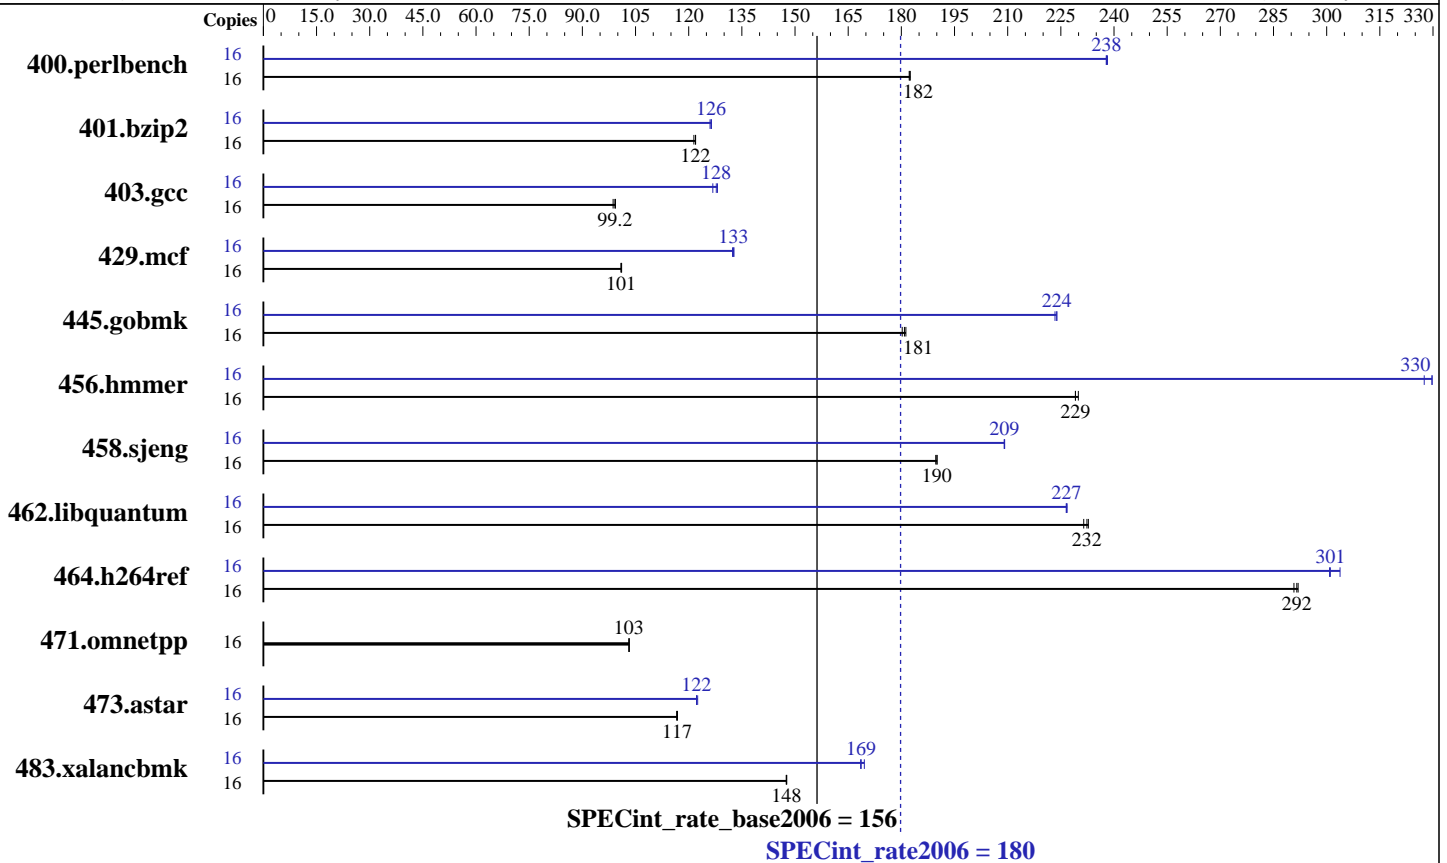

### Hardware

CPU Name: AMD Opteron 8356  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4,6,8 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: SAS, 72 GB, 10 K RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ext3  
 System State: Runlevel 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4600 M2

SPECint\_rate2006 = 180  
SPECint\_rate\_base2006 = 156

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>857</b>	<b>182</b>	857	183	858	182	16	<b>657</b>	<b>238</b>	657	238	656	238
401.bzip2	16	1271	121	1266	122	<b>1266</b>	<b>122</b>	16	1221	126	<b>1222</b>	<b>126</b>	1225	126
403.gcc	16	1305	98.7	<b>1299</b>	<b>99.2</b>	1297	99.3	16	<b>1008</b>	<b>128</b>	1016	127	1005	128
429.mcf	16	1446	101	<b>1445</b>	<b>101</b>	1444	101	16	1099	133	<b>1100</b>	<b>133</b>	1102	132
445.gobmk	16	926	181	<b>928</b>	<b>181</b>	931	180	16	<b>750</b>	<b>224</b>	750	224	751	223
456.hammer	16	649	230	<b>652</b>	<b>229</b>	652	229	16	456	328	<b>453</b>	<b>330</b>	453	330
458.sjeng	16	1021	190	1019	190	<b>1019</b>	<b>190</b>	16	926	209	926	209	<b>926</b>	<b>209</b>
462.libquantum	16	<b>1427</b>	<b>232</b>	1432	231	1424	233	16	1464	227	<b>1463</b>	<b>227</b>	1462	227
464.h264ref	16	1218	291	1213	292	<b>1214</b>	<b>292</b>	16	1177	301	<b>1176</b>	<b>301</b>	1166	304
471.omnetpp	16	969	103	<b>969</b>	<b>103</b>	969	103	16	969	103	<b>969</b>	<b>103</b>	969	103
473.astar	16	961	117	<b>962</b>	<b>117</b>	963	117	16	917	123	<b>919</b>	<b>122</b>	919	122
483.xalancbmk	16	<b>748</b>	<b>148</b>	748	148	748	148	16	651	170	655	169	<b>654</b>	<b>169</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'numactl' was used to bind copies to the cores  
Environment variable PGI\_HUGE\_PAGES set to 150  
'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 4915200' was used to set environment locked pages in memory quantity  
Set vm/nr\_hugepages=2400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

Default BIOS settings were used.

## Base Compiler Invocation

C benchmarks:  
pgcc  
C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4600 M2

SPECint\_rate2006 = 180  
SPECint\_rate\_base2006 = 156

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Base Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:  
-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 --zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:  
-w

C++ benchmarks:  
-w

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):  
pathCC

471.omnetpp: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4600 M2

SPECint\_rate2006 = 180  
SPECint\_rate\_base2006 = 156

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
-WOPT:if\_conv=0 -CG:local\_sched\_alg=1  
  
401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4  
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64  
-Bstatic\_pgi  
  
403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast  
  
429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1  
-Msmartalloc=huge:150 -tp barcelona -Bstatic\_pgi  
  
445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0  
-CG:p2align=on  
  
456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed  
-Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const  
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64  
-Bstatic\_pgi  
  
458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)  
-fastsse -Msmartalloc=huge:150 -Mfprelaxed  
-tp barcelona-64 -Bstatic\_pgi  
  
462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8  
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg  
-tp barcelona-64 -Bstatic\_pgi  
  
464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150  
-Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4600 M2

SPECint\_rate2006 = 180  
SPECint\_rate\_base2006 = 156

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525
          -m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
              -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
              -lsmartheap
```

## Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:28:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 June 2008.