



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 928

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECint_rate_base2006 = 809

CPU2006 license: 11


Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

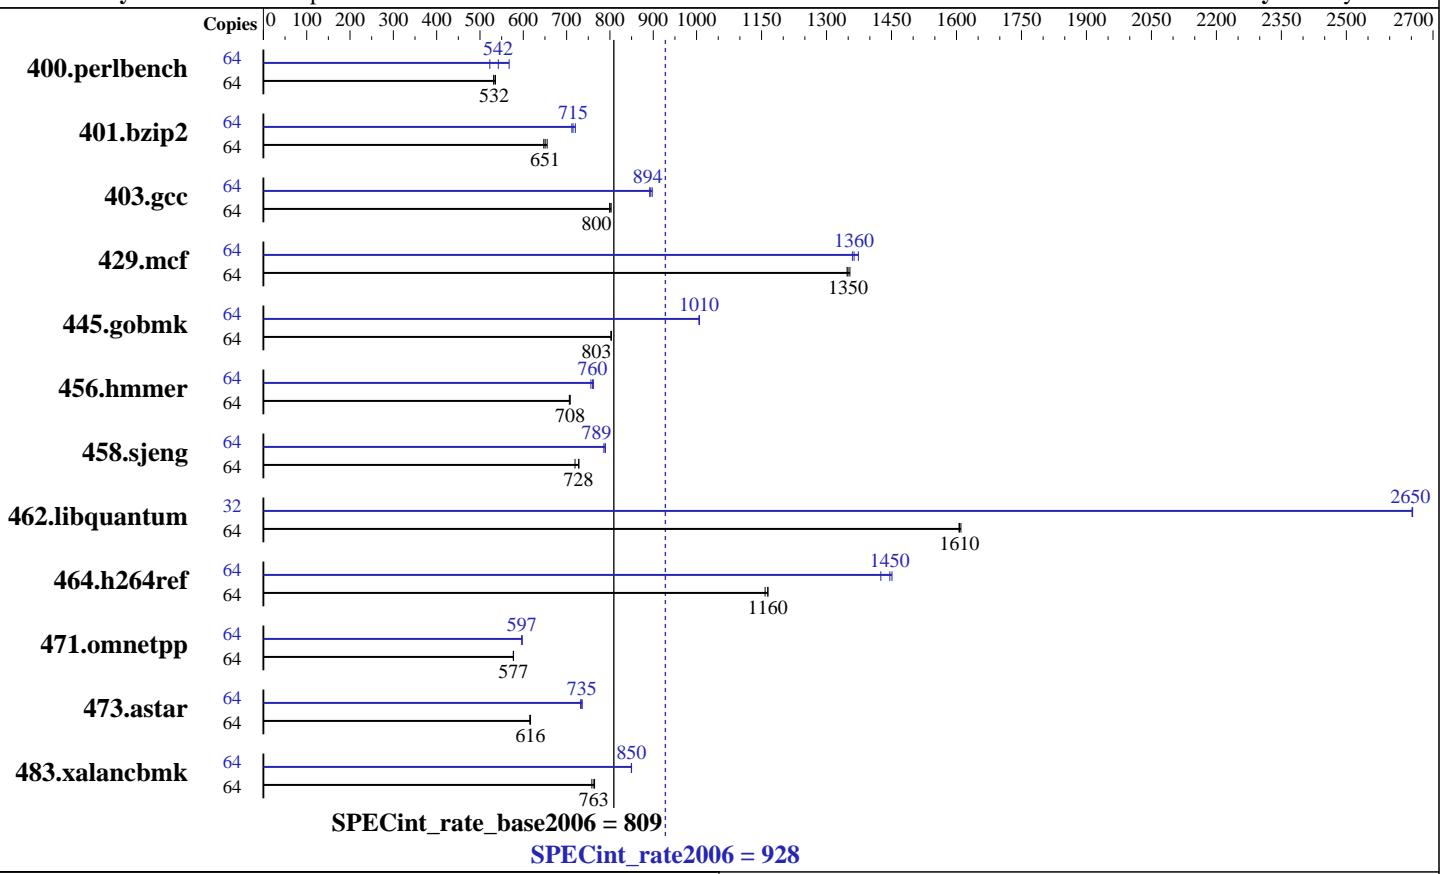

Hardware

CPU Name: POWER6
CPU Characteristics:
CPU MHz:
FPU:
CPU(s) enabled: 32 cores, 16 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per core
L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 128 GB (64x2 GB) DDR2 533 MHz
Disk Subsystem: 2x146 GB SFF SAS 10K RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Advanced Platform 5.2 for IBM POWER
Compiler: IBM XL C/C++ Advanced Edition for Linux, V9.0
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: -IBM Post-Link Optimization for Linux on POWER, Version 5.4.0-17
-MicroQuill SmartHeap 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 928

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECint_rate_base2006 = 809

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1167	536	1174	532	1177	531	64	1196	523	1153	542	1102	567
401.bzip2	64	943	655	954	647	949	651	64	858	720	867	712	864	715
403.gcc	64	645	799	644	800	642	803	64	578	892	574	898	576	894
429.mcf	64	433	1350	431	1350	432	1350	64	429	1360	428	1360	425	1370
445.gobmk	64	836	803	837	802	835	804	64	667	1010	667	1010	667	1010
456.hammer	64	844	708	845	706	844	708	64	790	756	786	760	784	762
458.sjeng	64	1064	728	1063	728	1076	719	64	981	789	985	786	981	789
462.libquantum	64	826	1610	825	1610	824	1610	32	250	2650	250	2650	250	2650
464.h264ref	64	1223	1160	1216	1160	1216	1160	64	976	1450	979	1450	994	1430
471.omnetpp	64	693	577	693	577	693	577	64	670	597	670	597	670	597
473.astar	64	731	615	729	616	728	617	64	611	735	611	736	614	732
483.xalancbmk	64	578	765	582	758	579	763	64	520	850	520	850	520	850

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

kernel release 2.6.18-91.el5.

See flags file for details on following settings.

ulimit -s (stack) set to 1048576.

System set to Enhanced mode when defining partition on HMC

System set to "Chip affinity" mode using the HMC command
chsyscfg ... -i "addr_broadcast_perf_policy=chip_affinity"

Large pages reserved as follows by root user:

```
echo 4240 > /proc/sys/vm/nr_hugepages
```

System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.

```
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
export XLF RTEOPTS=intrinthds=1
```

IBM Post-Link Optimization tool used for

```
400.perlbench 401.bzip2 403.gcc 429.mcf 445.gobmk 456.hammer 458.sjeng
462.libquantum 464.h264ref 473.astar 483.xalancbmk
```

Benchmarks bound to a processor using numactl on the submit command.

Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 928

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECint_rate_base2006 = 809

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
xlc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-O5 -qalias=noansi -qalloca -lhugetlbfs

C++ benchmarks:
-O5 -qrtti -lsmartheap

Base Other Flags

C benchmarks:
-qipa=noobject -qipa=threads

C++ benchmarks:
-qipa=noobject -qipa=threads

Peak Compiler Invocation

C benchmarks:
xlc -qlanglvl=extc99

C++ benchmarks:
xlc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 928

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECint_rate_base2006 = 809

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Portability Flags (Continued)

464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalias=noansi
-lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalloc -q64
-lhugetlbfs

429.mcf: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
-lhugetlbfs

456.hmmer: Same as 401.bzip2

458.sjeng: Same as 401.bzip2

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
-q64 -lhugetlbfs

464.h264ref: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64
-lhugetlbfs

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
-lsmartheap

483.xalancbmk: -Wl,-q -O4 -lsmartheap

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 928

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECint_rate_base2006 = 809

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:40:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 June 2008.