SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon L5420)

SPECint®_rate2006 = 62.1

SPECint_rate_base2006 = 52.4

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

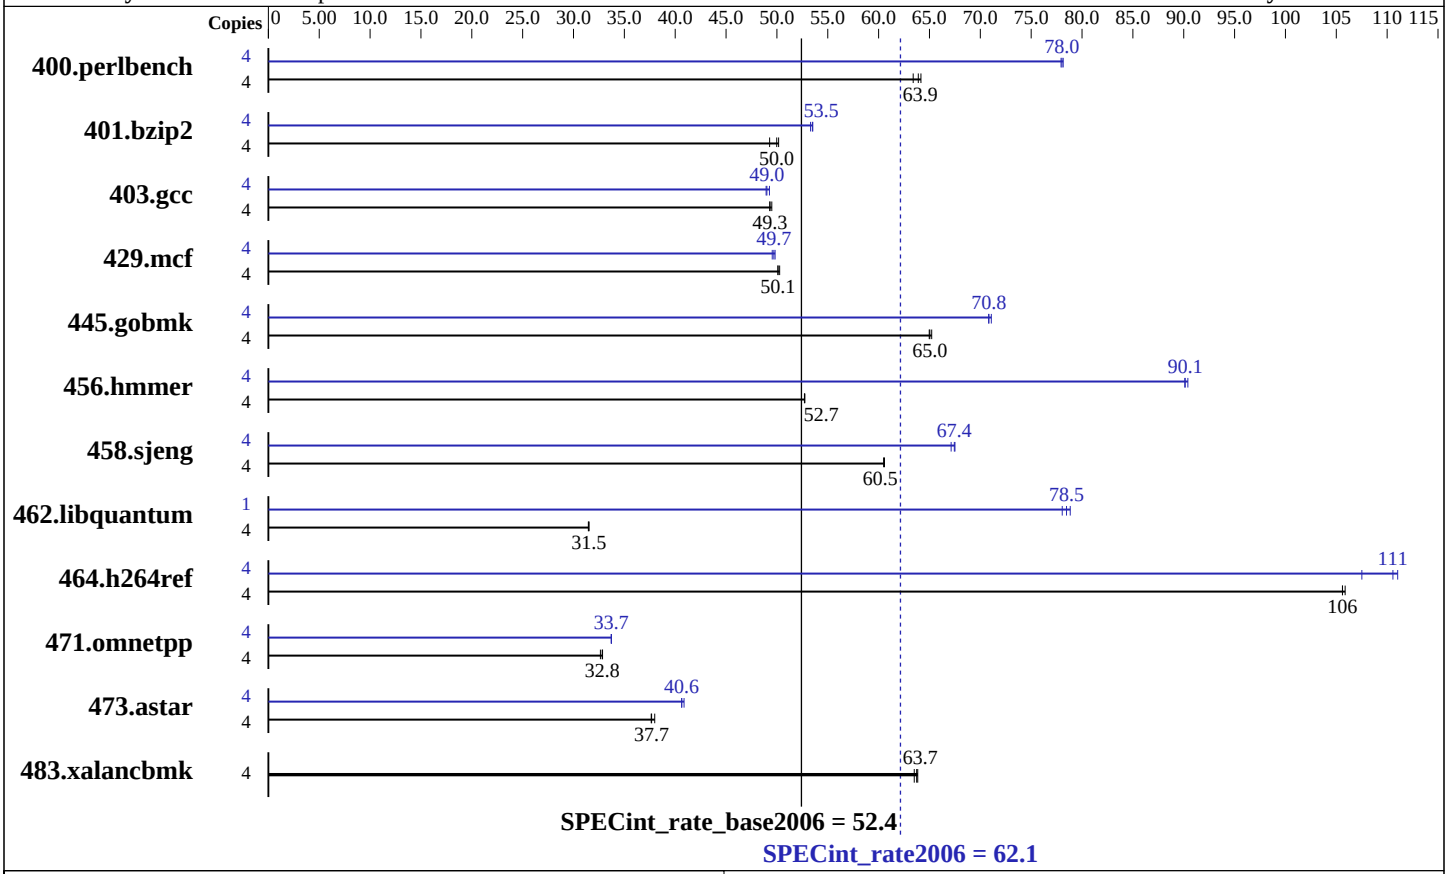

Hardware

CPU Name:	Intel Xeon L5420
CPU Characteristics:	2.50 GHz, 2x6 MB L2 shared, 1333 MHz bus
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (4x4 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon L5420)

SPECint_rate2006 = 62.1

SPECint_rate_base2006 = 52.4

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	616	63.4	**612**	**63.9**	609	64.2	4	**501**	**78.0**	500	78.1	501	77.9
401.bzip2	4	783	49.3	**772**	**50.0**	769	50.2	4	721	53.5	**722**	**53.5**	724	53.3
403.gcc	4	**653**	**49.3**	653	49.3	651	49.5	4	654	49.3	658	48.9	**657**	**49.0**
429.mcf	4	**728**	**50.1**	726	50.3	728	50.1	4	732	49.8	**734**	**49.7**	736	49.5
445.gobmk	4	646	65.0	643	65.2	**645**	**65.0**	4	590	71.1	**592**	**70.8**	593	70.8
456.hmmer	4	**708**	**52.7**	707	52.8	708	52.7	4	414	90.1	**414**	**90.1**	413	90.4
458.sjeng	4	799	60.6	**800**	**60.5**	800	60.5	4	721	67.1	717	67.5	**718**	**67.4**
462.libquantum	4	2634	31.5	**2630**	**31.5**	2630	31.5	1	263	78.8	265	78.1	**264**	**78.5**
464.h264ref	4	836	106	**838**	**106**	838	106	4	823	108	**801**	**111**	797	111
471.omnetpp	4	766	32.6	**762**	**32.8**	761	32.9	4	741	33.7	742	33.7	**741**	**33.7**
473.astar	4	**745**	**37.7**	739	38.0	746	37.6	4	691	40.6	**691**	**40.6**	687	40.9
483.xalancbmk	4	435	63.5	432	63.8	**433**	**63.7**	4	435	63.5	432	63.8	**433**	**63.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
```

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2,
456.hmmer, for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/opt/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/cce/10.1.008/bin/icc`
`-L/opt/intel/cce/10.1.008/lib`
`-I/opt/intel/cce/10.1.008/include`

456.hmmer: `/opt/intel/cce/10.1.008/bin/icc`
`-L/opt/intel/cce/10.1.008/lib`
`-I/opt/intel/cce/10.1.008/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:38:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 June 2008.