



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint[®]2006 = 19.2

Bull Escala PL1660 (4.2 GHz, 1 core)

SPECint_base2006 = 15.8

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2008

Hardware Availability: Mar-2008

Software Availability: Oct-2007

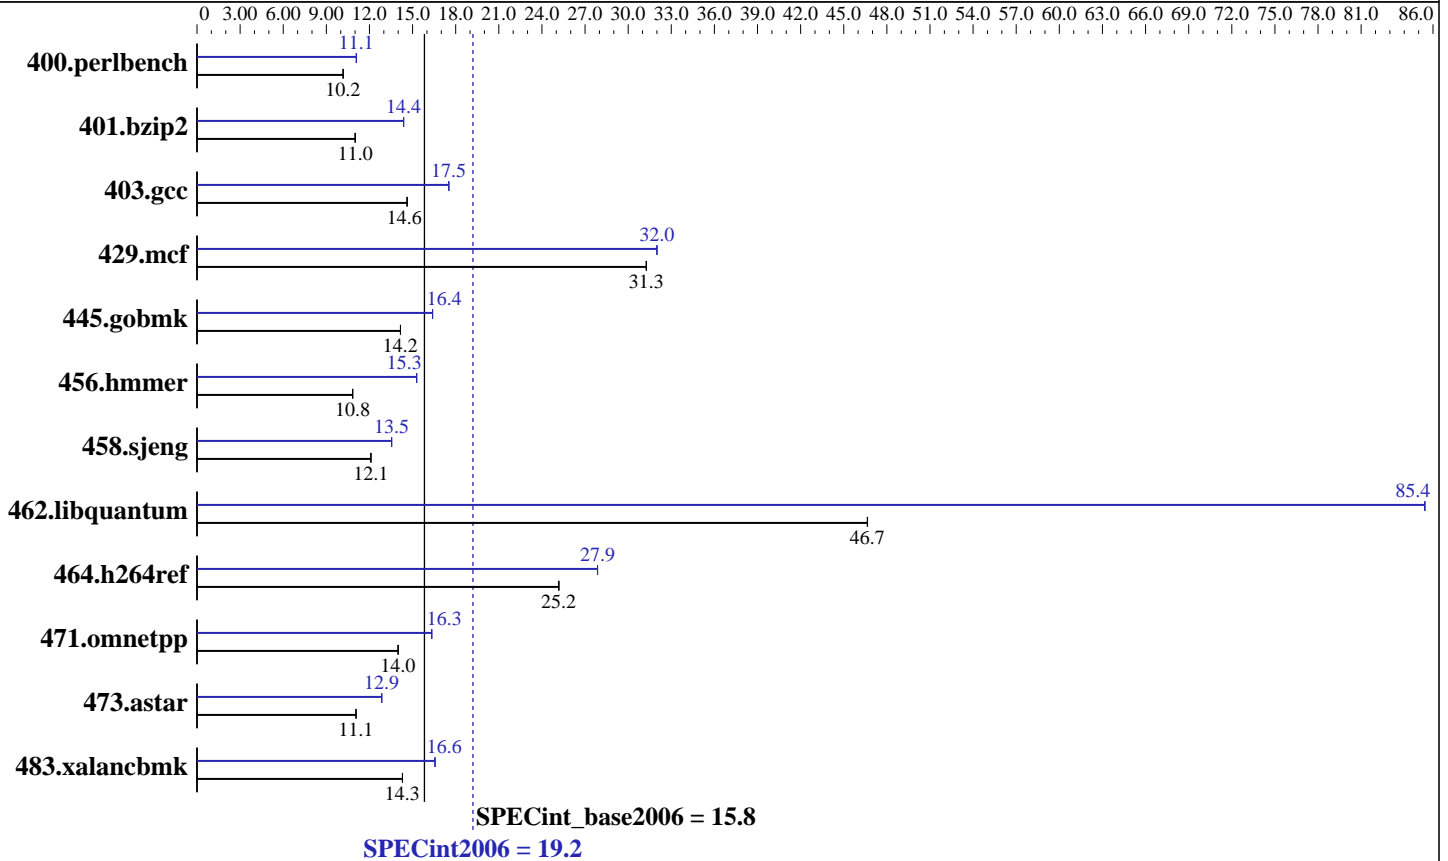

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz: 4200
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
 CPU(s) orderable: 4,8,12,16 cores (1 to 4 drawers with 2 chips)
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core
 L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 128 GB (64x2 GB) DDR2 667 MHz
 Disk Subsystem: 2x73 GB SAS 15K RPM
 Other Hardware: None

Software

Operating System: IBM AIX 5L V5.3 updated with the 5300-07 Technology Level
 Compiler: XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF.
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = **19.2**

Bull Escala PL1660 (4.2 GHz, 1 core)

SPECint_base2006 = **15.8**

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	961	10.2	960	10.2	<u>961</u>	<u>10.2</u>	<u>881</u>	<u>11.1</u>	881	11.1	881	11.1
401.bzip2	877	11.0	876	11.0	<u>877</u>	<u>11.0</u>	671	14.4	671	14.4	<u>671</u>	<u>14.4</u>
403.gcc	<u>551</u>	<u>14.6</u>	551	14.6	551	14.6	460	17.5	459	17.5	<u>459</u>	<u>17.5</u>
429.mcf	292	31.3	292	31.3	<u>292</u>	<u>31.3</u>	285	32.0	285	32.0	<u>285</u>	<u>32.0</u>
445.gobmk	741	14.2	<u>741</u>	<u>14.2</u>	741	14.2	640	16.4	640	16.4	<u>640</u>	<u>16.4</u>
456.hmmmer	861	10.8	<u>861</u>	<u>10.8</u>	861	10.8	610	15.3	<u>610</u>	<u>15.3</u>	610	15.3
458.sjeng	1000	12.1	<u>1000</u>	<u>12.1</u>	1000	12.1	894	13.5	<u>893</u>	<u>13.5</u>	893	13.5
462.libquantum	<u>444</u>	<u>46.7</u>	444	46.6	444	46.7	243	85.4	<u>243</u>	<u>85.4</u>	243	85.4
464.h264ref	879	25.2	<u>879</u>	<u>25.2</u>	879	25.2	794	27.9	<u>794</u>	<u>27.9</u>	794	27.9
471.omnetpp	447	14.0	<u>447</u>	<u>14.0</u>	447	14.0	383	16.3	<u>383</u>	<u>16.3</u>	383	16.3
473.astar	634	11.1	634	11.1	<u>634</u>	<u>11.1</u>	546	12.8	546	12.9	<u>546</u>	<u>12.9</u>
483.xalancbmk	483	14.3	483	14.3	<u>483</u>	<u>14.3</u>	417	16.6	417	16.6	<u>417</u>	<u>16.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

See flags file of details on following settings.
all ulimits set to unlimited.
Environment variables set before executing benchmarks:
MALLOCOPTIONS=pool
MEMORY_AFFINITY=MCM
XLFRTOPTS=intrinthds=1
System set to "Enhanced" mode when defining partition on HMC.
Remote console disabled in /etc/inittab.
fdpr binary optimization tool used for:
400.perlbench 401.bzip2 403.gcc 429.mcf 456.hmmmer
458.sjeng 462.libquantum 464.h264ref 473.astar
Speed run on 1 core partition defined on HMC;
(unused cores are powered on, but their clock is halted;
Full L3 cache of the chip is used by the remaining core)
4000 16M large pages defined with vmo command

Base Compiler Invocation

C benchmarks:
/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/usr/vacpp/bin/xlc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 19.2

Bull Escala PL1660 (4.2 GHz, 1 core)

SPECint_base2006 = 15.8

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi
-qalloca -blpdata

C++ benchmarks:
-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-blpdata

Base Other Flags

C benchmarks:
-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:
-qipa=noobject -qipa=threads -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 19.2

Bull Escala PL1660 (4.2 GHz, 1 core)

SPECint_base2006 = 15.8

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2007

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
               -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS
               -qalias=noansi -qfdpr -blpdata

401.bzip2: -bmaxdata:0x4ffffffc -qpdf1(pass 1) -qpdf2(pass 2) -O5
            -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS -qfdpr
            -blpdata

403.gcc: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
          -D_ILS_MACROS -qalloca -qfdpr -q64 -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx
          -qvecnvml -D_ILS_MACROS -qfdpr -blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx
            -qvecnvml -D_ILS_MACROS -blpdata

456.hmmer: -O5 -qlargepage -D_ILS_MACROS -qfdpr -blpdata

458.sjeng: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
            -qvecnvml -D_ILS_MACROS -qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
                -qvecnvml -D_ILS_MACROS -q64 -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -D_ILS_MACROS
              -qenablevmx -qvecnvml -qfdpr -bdatapsize:64K
              -bstacksize:64K -btextpsize:64K

```

C++ benchmarks:

```

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
              -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS
              -qalign=natural -qrtti=all -qinlglue -blpdata

473.astar: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
            -qlargepage -D_ILS_MACROS -qfdpr -qinlglue
            -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
                -qlargepage -D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR
                -blpdata

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 19.2

Bull Escala PL1660 (4.2 GHz, 1 core)

SPECint_base2006 = 15.8

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2008

Hardware Availability: Mar-2008

Software Availability: Oct-2007

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-AIX-XL.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-AIX-XL.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 20:01:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 July 2008.