



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECint<sup>®</sup>\_rate2006 = Not Run

### PowerEdge 2900 III (Intel Xeon E5410, 2.33 GHz)

## SPECint\_rate\_base2006 = 93.6

CPU2006 license: 55


Test date: Jul-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

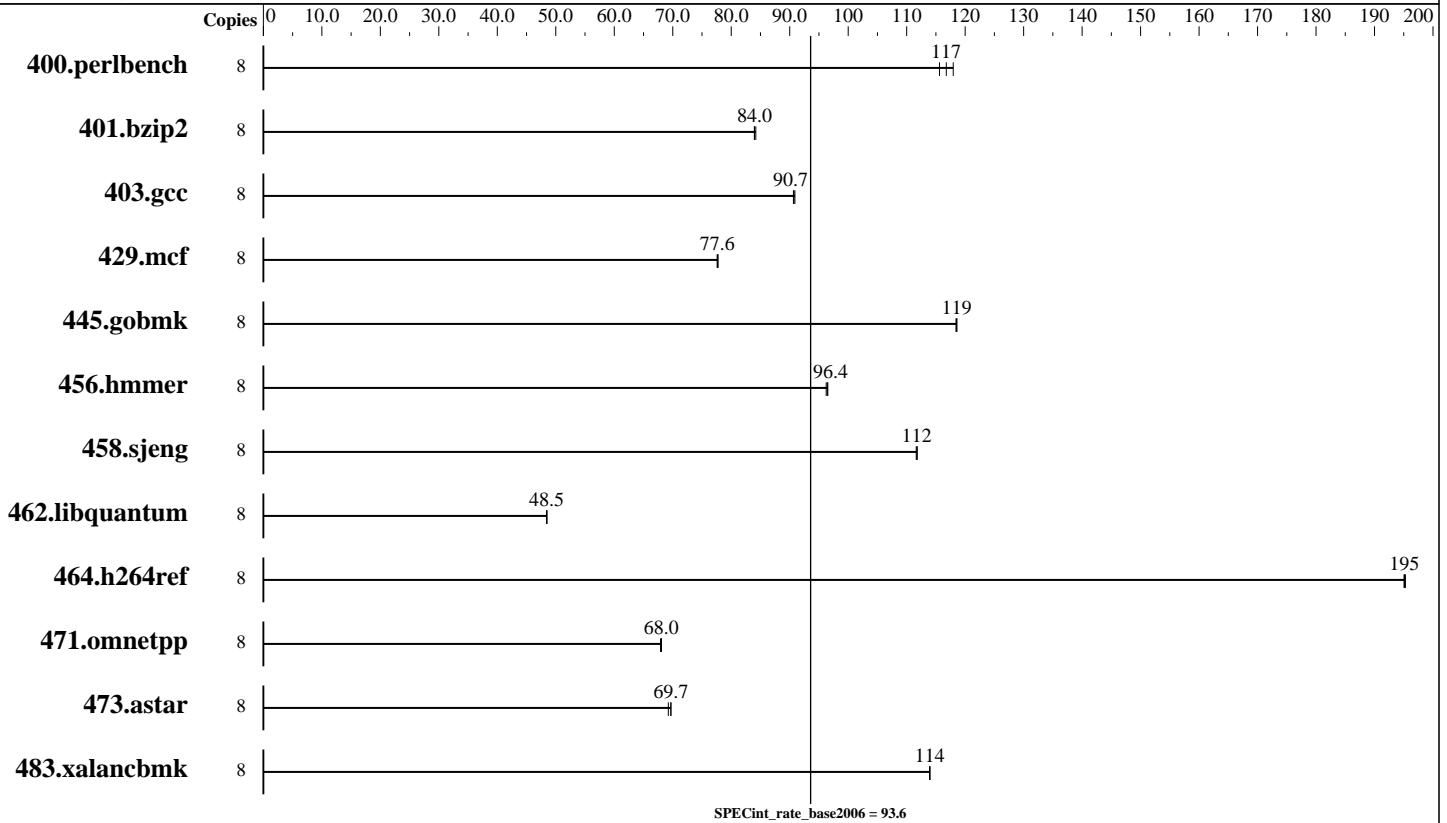

### Hardware

CPU Name: Intel Xeon E5410  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (8 x 1GB 667 MHz DDR2 FB-DIMM)  
 Disk Subsystem: 1 x 300GB 10000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge 2900 III (Intel Xeon E5410, 2.33 GHz)

SPECint\_rate\_base2006 = 93.6

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Jul-2008  
Hardware Availability: Nov-2007  
Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	663	118	<b>669</b>	<b>117</b>	676	116							
401.bzip2	8	920	84.0	917	84.2	<b>919</b>	<b>84.0</b>							
403.gcc	8	711	90.6	709	90.9	<b>710</b>	<b>90.7</b>							
429.mcf	8	<b>940</b>	<b>77.6</b>	940	77.6	938	77.8							
445.gobmk	8	708	119	<b>708</b>	<b>119</b>	709	118							
456.hammer	8	776	96.2	773	96.5	<b>774</b>	<b>96.4</b>							
458.sjeng	8	<b>866</b>	<b>112</b>	866	112	867	112							
462.libquantum	8	<b>3420</b>	<b>48.5</b>	3421	48.5	3420	48.5							
464.h264ref	8	<b>907</b>	<b>195</b>	907	195	908	195							
471.omnetpp	8	736	67.9	<b>735</b>	<b>68.0</b>	734	68.1							
473.astar	8	<b>806</b>	<b>69.7</b>	806	69.7	811	69.2							
483.xalancbmk	8	485	114	<b>484</b>	<b>114</b>	484	114							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_STACK\_SIZE set to 64M  
KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## Platform Notes

BIOS Settings:  
Adjacent Cache Line Prefetch = Disabled (default Enabled)  
Hardware Prefetcher = Disabled (default Enabled)

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge 2900 III (Intel Xeon E5410, 2.33 GHz)

SPECint\_rate\_base2006 = 93.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Dell-Intel-ic10.1-int-linux64-revC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Dell-Intel-ic10.1-int-linux64-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:54:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 August 2008.