SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon X5460, 3.16 GHz)

SPECint®_rate2006 = 137

SPECint_rate_base2006 = 111

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2008
Hardware Availability: Nov-2007
Software Availability: May-2008

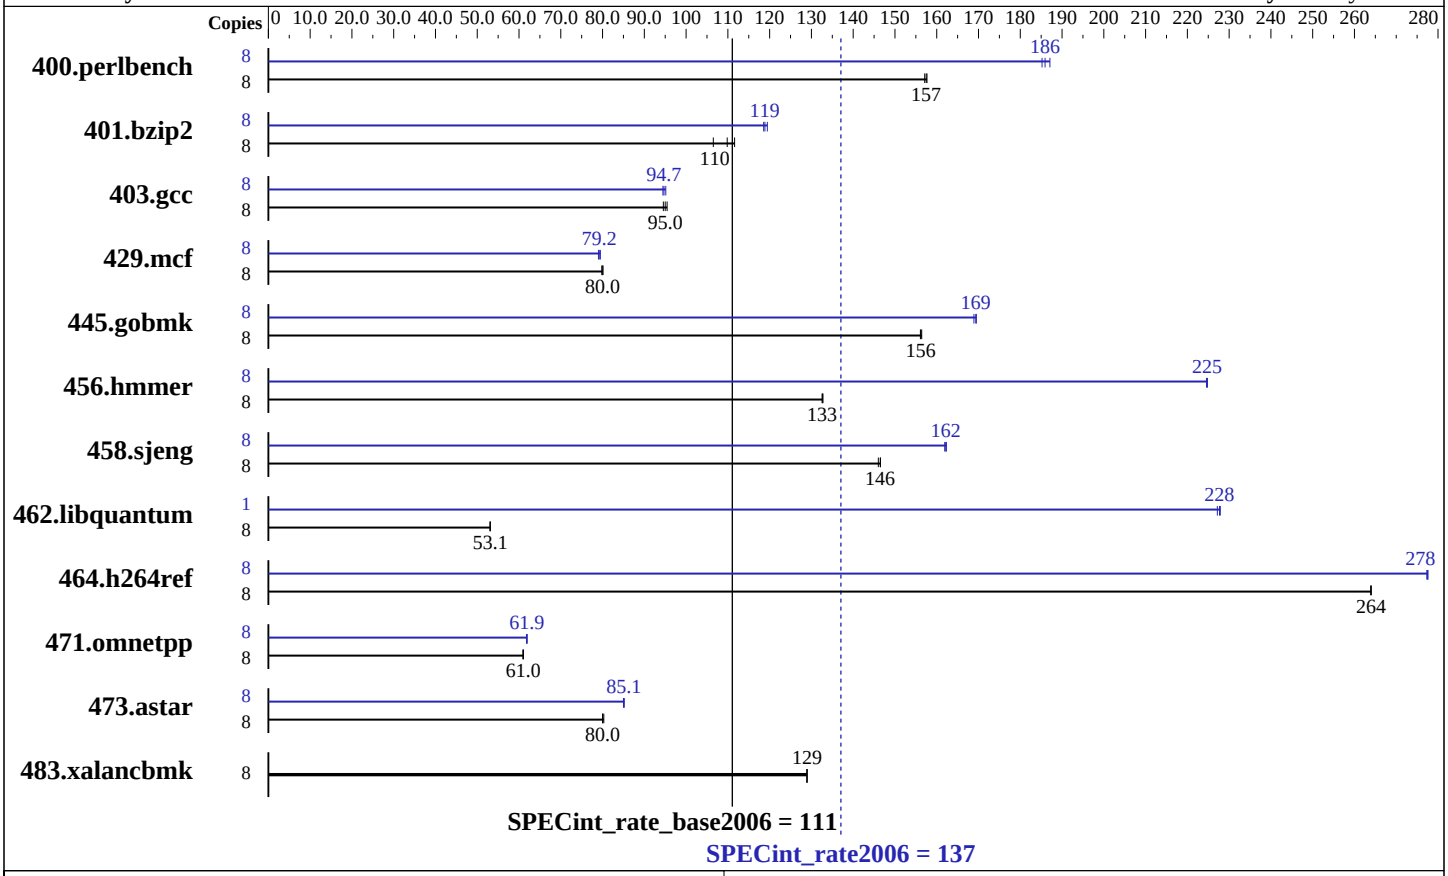

Hardware

CPU Name:	Intel Xeon X5460
CPU Characteristics:	
CPU MHz:	3166
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB, DDR2-667 MHz, CL5, Reg, Dual Rank)
Disk Subsystem:	2 x 73 GB GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2 Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20080312 Package ID: l_cc_p_10.1.015
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2900 III (Intel Xeon X5460, 3.16 GHz)

SPECint_rate2006 = 137

SPECint_rate_base2006 = 111

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2008
Hardware Availability: Nov-2007
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**496**	**157**	497	157	496	158	8	422	185	418	187	**420**	**186**
401.bzip2	8	692	112	725	107	**703**	**110**	8	**649**	**119**	651	119	646	119
403.gcc	8	681	94.6	**678**	**95.0**	675	95.5	8	**680**	**94.7**	677	95.1	682	94.4
429.mcf	8	911	80.1	914	79.8	**912**	**80.0**	8	923	79.0	918	79.5	**921**	**79.2**
445.gobmk	8	**537**	**156**	537	156	538	156	8	495	169	**496**	**169**	497	169
456.hmmer	8	562	133	**563**	**133**	563	133	8	332	225	332	225	**332**	**225**
458.sjeng	8	663	146	661	147	**661**	**146**	8	598	162	**597**	**162**	596	162
462.libquantum	8	3122	53.1	**3122**	**53.1**	3122	53.1	1	**91.0**	**228**	91.2	227	90.9	228
464.h264ref	8	671	264	671	264	**671**	**264**	8	638	277	638	278	**638**	**278**
471.omnetpp	8	819	61.0	820	61.0	**820**	**61.0**	8	809	61.8	**808**	**61.9**	807	61.9
473.astar	8	**702**	**80.0**	699	80.3	702	80.0	8	661	85.0	**660**	**85.1**	659	85.2
483.xalancbmk	8	428	129	428	129	**428**	**129**	8	428	129	428	129	**428**	**129**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Platform Notes

```
BIOS Settings:
Adjacent Cache Line Prefetch = Disabled (default = Enabled)
```

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
taskset was used to bind processes to cores except
for 462.libquantum peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.015/bin/icc
-L/opt/intel/cce/10.1.015/lib
-I/opt/intel/cce/10.1.015/include

456.hmmer: /opt/intel/cce/10.1.015/bin/icc
-L/opt/intel/cce/10.1.015/lib
-I/opt/intel/cce/10.1.015/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.xml`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:19:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.