



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 81.5

PowerEdge 2970 (AMD Opteron 2344 HE, 1.7 GHz)

SPECint_rate_base2006 = 71.0

CPU2006 license: 55


Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

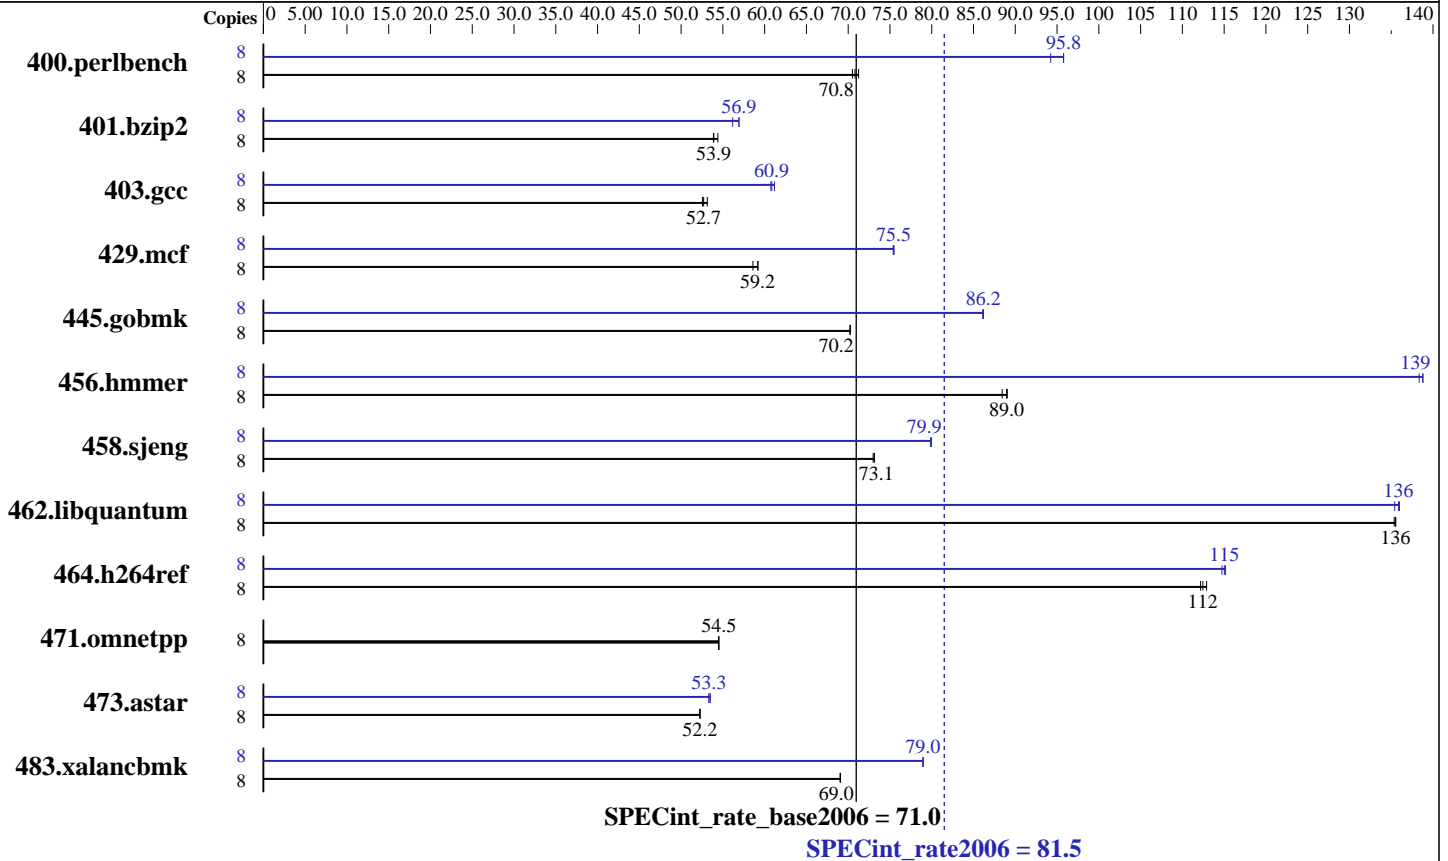

Hardware

CPU Name: AMD Opteron 2344 HE
 CPU Characteristics: 1700
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4GB, DDR2-667, CL5)
 Disk Subsystem: 1 x 73GB 2.5" SAS 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 81.5

PowerEdge 2970 (AMD Opteron 2344 HE, 1.7 GHz)

SPECint_rate_base2006 = 71.0

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1097	71.2	1109	70.5	1104	70.8	8	829	94.2	816	95.8	816	95.8
401.bzip2	8	1419	54.4	1432	53.9	1433	53.9	8	1374	56.2	1356	56.9	1356	56.9
403.gcc	8	1212	53.1	1222	52.7	1225	52.6	8	1060	60.7	1058	60.9	1053	61.2
429.mcf	8	1245	58.6	1232	59.2	1233	59.2	8	968	75.4	967	75.5	967	75.5
445.gobmk	8	1195	70.2	1195	70.2	1195	70.2	8	974	86.2	975	86.1	974	86.2
456.hmmer	8	839	89.0	844	88.4	838	89.0	8	538	139	540	138	538	139
458.sjeng	8	1324	73.1	1326	73.0	1324	73.1	8	1211	79.9	1212	79.9	1211	79.9
462.libquantum	8	1223	136	1223	136	1225	135	8	1224	135	1219	136	1220	136
464.h264ref	8	1574	112	1568	113	1578	112	8	1539	115	1543	115	1537	115
471.omnetpp	8	917	54.5	918	54.5	917	54.5	8	917	54.5	918	54.5	917	54.5
473.astar	8	1075	52.2	1075	52.3	1075	52.2	8	1053	53.3	1050	53.5	1053	53.3
483.xalancbmk	8	799	69.0	799	69.1	799	69.0	8	699	78.9	699	79.0	699	79.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
mount -t hugetlbfs nodev /mnt/hugepages
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 81.5

PowerEdge 2970 (AMD Opteron 2344 HE, 1.7 GHz)

SPECint_rate_base2006 = 71.0

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

gcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 81.5

PowerEdge 2970 (AMD Opteron 2344 HE, 1.7 GHz)

SPECint_rate_base2006 = 71.0

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
 -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
 -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
 -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfp relaxed
 -Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
 -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
 -Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
 -Msmartalloc=huge:150 -Mfp relaxed -tp barcelona-64
 -Bstatic_pgi

462.libquantum: -fastsse -Mfp relaxed -Msmartalloc=huge:150 -Munroll=m:8
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
 -Msmartalloc=huge:150 -Mfp relaxed -tp barcelona-64
 -Bstatic_pgi

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 81.5

PowerEdge 2970 (AMD Opteron 2344 HE, 1.7 GHz)

SPECint_rate_base2006 = 71.0

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0
-lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:24:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.