SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5430, 2.66 GHz)

SPECint®_rate2006 = 120

SPECint_rate_base2006 = 98.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

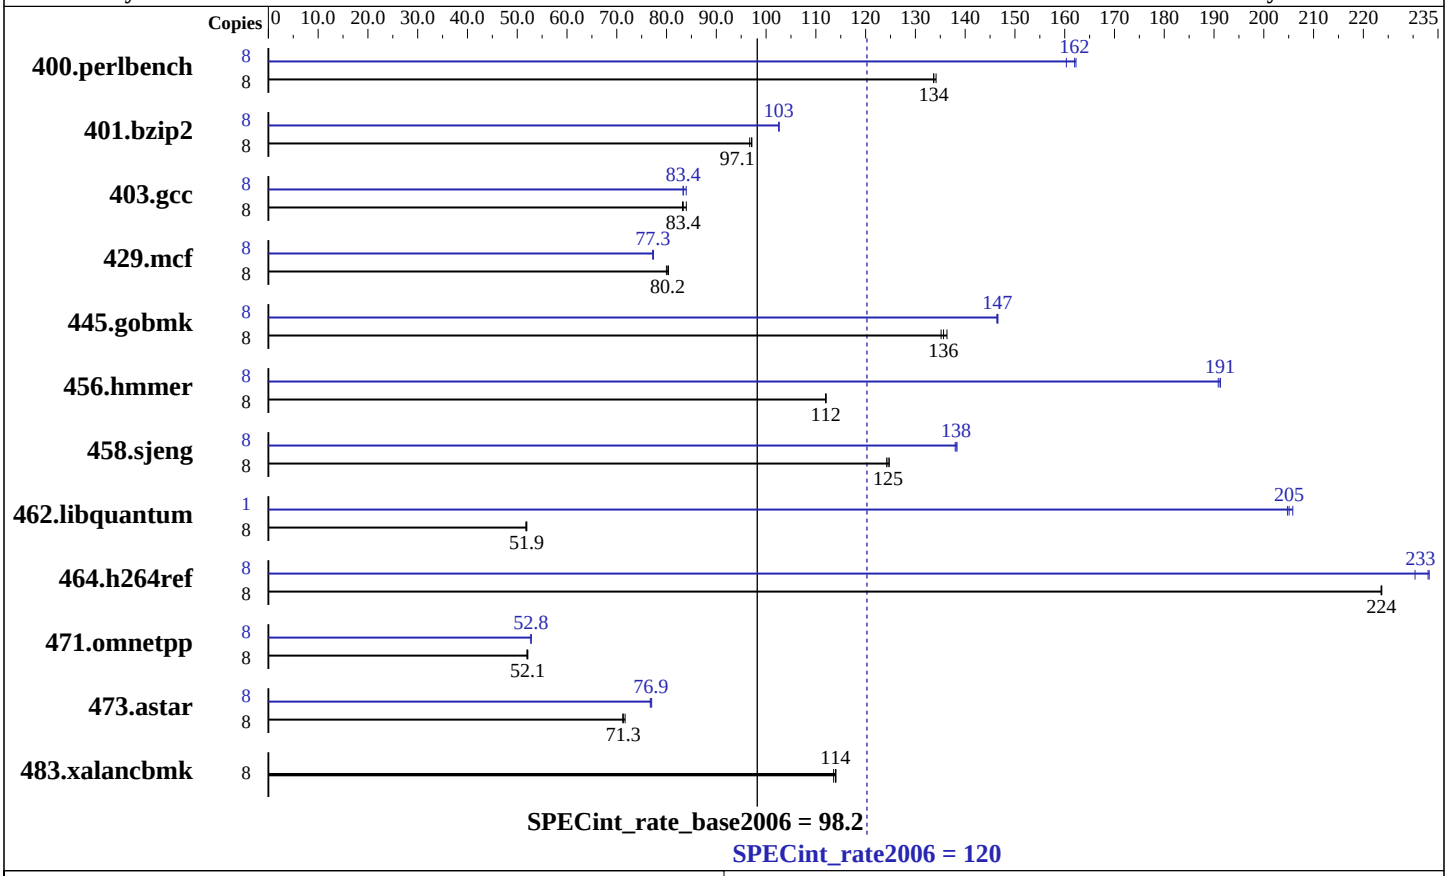

Hardware

CPU Name:	Intel Xeon E5430
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SUSE LINUX Enterprise Server 10 SP1 Kernel 2.6.16.46-0.12-smp for x86_64
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.17.50.0.15 SmartHeap library V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5430, 2.66 GHz)

SPECint_rate2006 = 120

SPECint_rate_base2006 = 98.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	585	134	583	134	**585**	**134**	8	487	160	**482**	**162**	482	162
401.bzip2	8	795	97.1	798	96.7	**795**	**97.1**	8	753	103	**753**	**103**	752	103
403.gcc	8	**773**	**83.4**	774	83.2	767	84.0	8	773	83.3	**773**	**83.4**	767	84.0
429.mcf	8	908	80.4	**909**	**80.2**	912	80.0	8	943	77.4	**944**	**77.3**	945	77.2
445.gobmk	8	615	136	**619**	**136**	621	135	8	**573**	**147**	573	147	573	146
456.hmmer	8	**666**	**112**	666	112	666	112	8	390	191	391	191	**390**	**191**
458.sjeng	8	**777**	**125**	776	125	779	124	8	**700**	**138**	701	138	700	138
462.libquantum	8	3192	51.9	**3196**	**51.9**	3204	51.7	1	**101**	**205**	101	206	101	205
464.h264ref	8	792	224	**792**	**224**	791	224	8	768	230	759	233	**760**	**233**
471.omnetpp	8	959	52.1	**960**	**52.1**	963	51.9	8	**947**	**52.8**	947	52.8	948	52.8
473.astar	8	784	71.7	**787**	**71.3**	789	71.2	8	729	77.0	732	76.7	**731**	**76.9**
483.xalancbmk	8	484	114	486	114	**484**	**114**	8	484	114	486	114	**484**	**114**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/cpu2006/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090713.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090713.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:20:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.