



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = 77.4

PRIMERGY RX100 S5, Intel Xeon X3370, 3.0 GHz

SPECint_rate_base2006 = 66.3

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Aug-2008

Hardware Availability: Oct-2008

Software Availability: May-2008

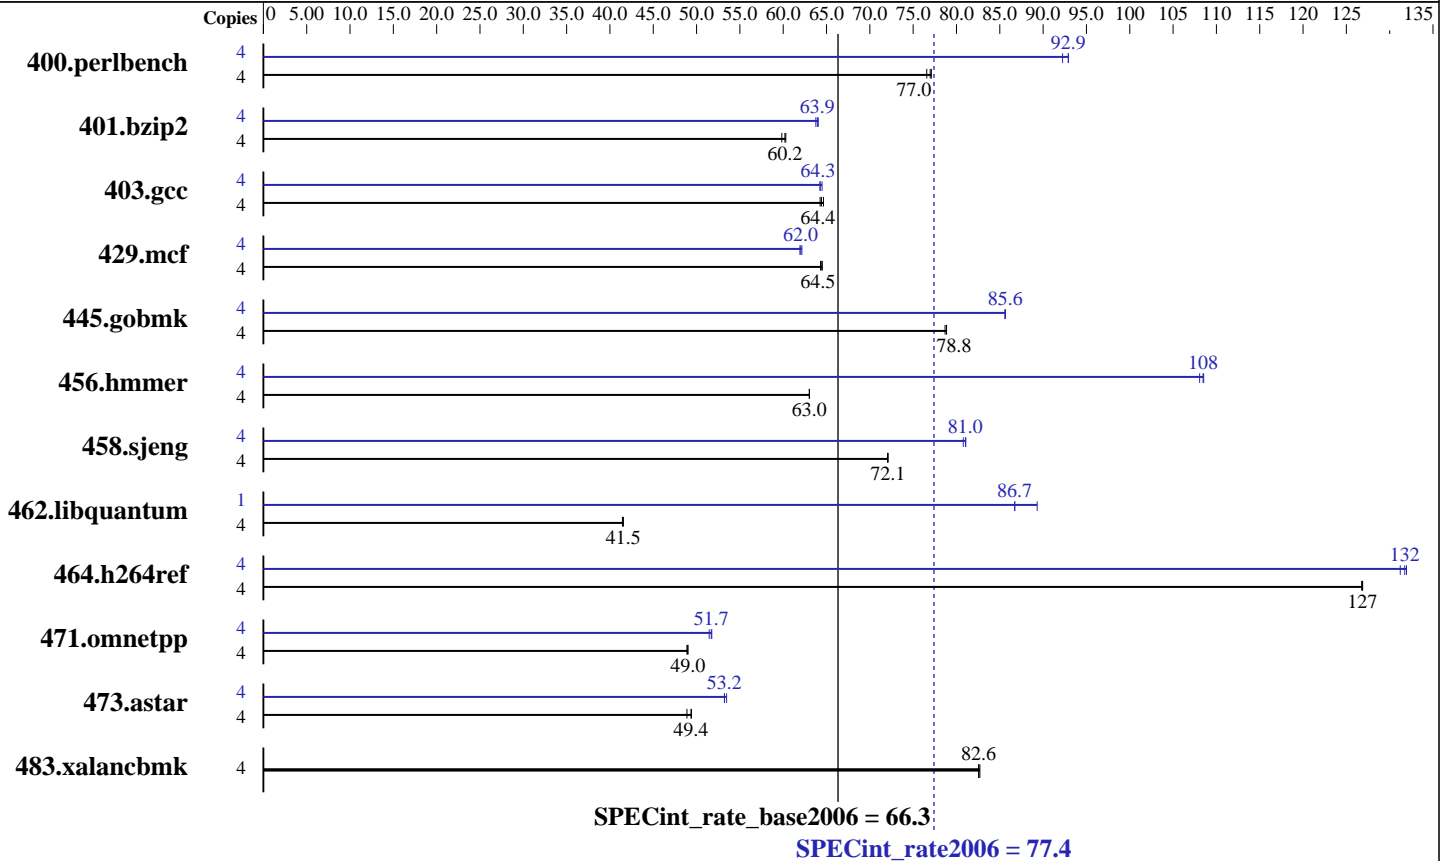

Hardware

CPU Name: Intel Xeon X3370
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL 6-6-6, ECC)
 Disk Subsystem: 1x SATA, 160 GB, 7200 rpm
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64, Version 10.1, Build 20070913
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap Library, Version 8.1
 binutils-2.17.50.0.5-0.1.x86_64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 77.4

PRIMERGY RX100 S5, Intel Xeon X3370, 3.0 GHz

SPECint_rate_base2006 = 66.3

CPU2006 license: 22

Test date: Aug-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	508	77.0	507	77.1	510	76.6	4	421	92.9	421	92.9	424	92.2
401.bzip2	4	645	59.8	640	60.3	641	60.2	4	604	63.9	603	64.0	605	63.8
403.gcc	4	500	64.4	498	64.6	501	64.3	4	501	64.3	501	64.3	499	64.5
429.mcf	4	566	64.5	567	64.3	566	64.5	4	587	62.2	589	61.9	588	62.0
445.gobmk	4	532	78.9	533	78.7	532	78.8	4	490	85.6	490	85.6	490	85.6
456.hmmer	4	592	63.0	592	63.0	592	63.0	4	344	108	344	109	345	108
458.sjeng	4	672	72.0	671	72.1	671	72.1	4	597	81.1	597	81.0	599	80.8
462.libquantum	4	2000	41.4	1995	41.5	1996	41.5	1	239	86.7	232	89.3	239	86.7
464.h264ref	4	698	127	698	127	698	127	4	675	131	671	132	672	132
471.omnetpp	4	511	48.9	510	49.0	510	49.0	4	486	51.5	484	51.7	483	51.8
473.astar	4	569	49.4	568	49.4	574	48.9	4	528	53.2	528	53.2	525	53.5
483.xalancbmk	4	334	82.6	334	82.7	334	82.6	4	334	82.6	334	82.7	334	82.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel compiler.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)

Platform Notes

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 77.4

PRIMERGY RX100 S5, Intel Xeon X3370, 3.0 GHz

SPECint_rate_base2006 = 66.3

CPU2006 license: 22

Test date: Aug-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

```
/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/opt/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

```
401.bzip2: icc
```

```
456.hmmer: icc
```

C++ benchmarks:

```
/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 77.4

PRIMERGY RX100 S5, Intel Xeon X3370, 3.0 GHz

SPECint_rate_base2006 = 66.3

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Aug-2008

Hardware Availability: Oct-2008

Software Availability: May-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
 -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
 -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
 -opt-streaming-stores always -vec-guard-write
 -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
 -no-prec-div -ansi-alias -opt-ra-region-strategy=block
 -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
 -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 77.4

PRIMERGY RX100 S5, Intel Xeon X3370, 3.0 GHz

SPECint_rate_base2006 = 66.3

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Aug-2008

Hardware Availability: Oct-2008

Software Availability: May-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:03:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.