



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 25.0

PowerEdge M600 (Intel Xeon L5240, 3.00GHz)

SPECint\_base2006 = 20.9

CPU2006 license: 55


Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: May-2008

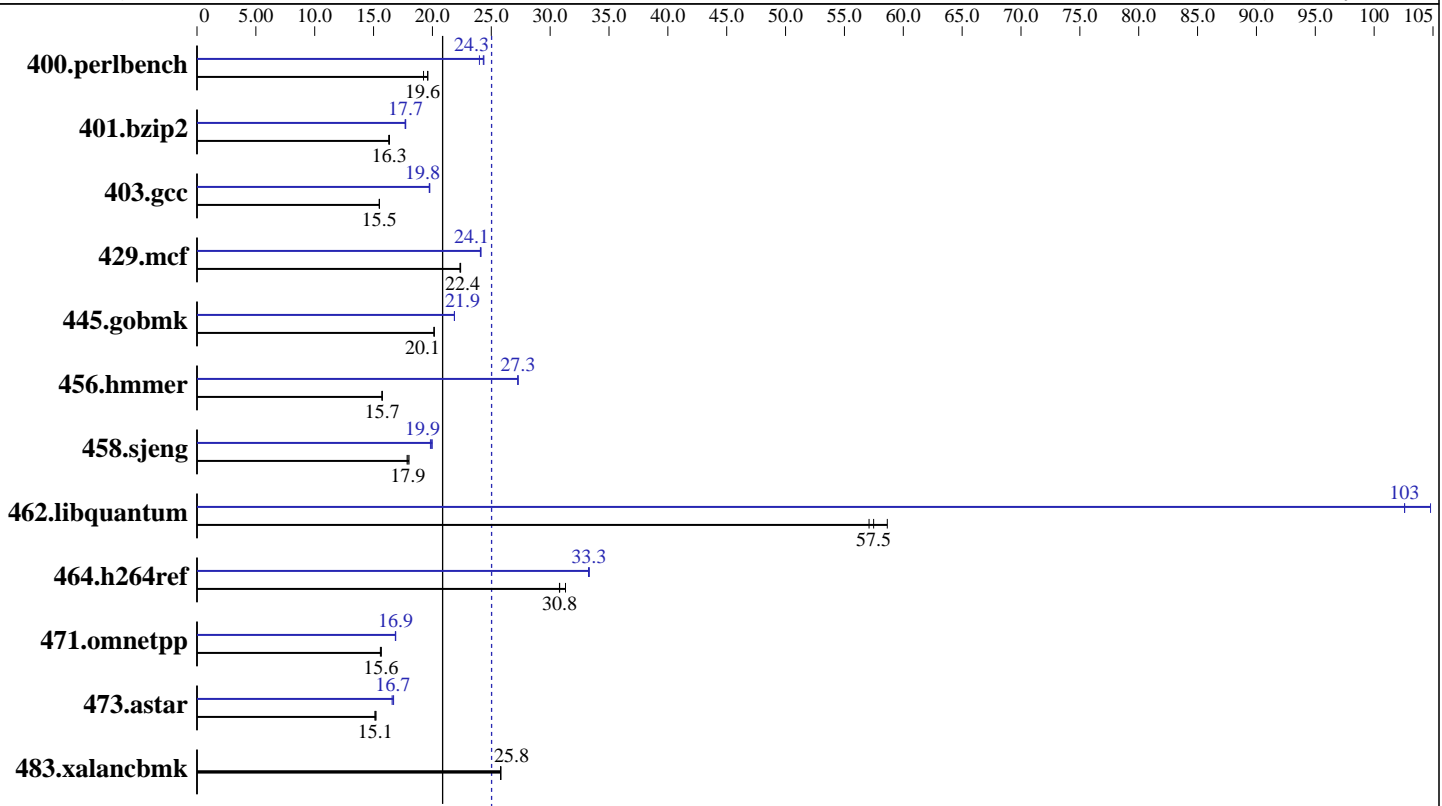

## Hardware

CPU Name: Intel Xeon L5240  
 CPU Characteristics:  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (4x4 GB 667 MHz ECC CL5 FB-DIMM)  
 Disk Subsystem: 1 x 80 GB 5400 RPM SATA  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20080312 Package ID: l\_cc\_p\_10.1.015  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 25.0

PowerEdge M600 (Intel Xeon L5240, 3.00GHz)

SPECint\_base2006 = 20.9

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	508	19.2	<b><u>499</u></b>	<b><u>19.6</u></b>	498	19.6	<b><u>402</u></b>	<b><u>24.3</u></b>	407	24.0	401	24.4
401.bzip2	<b><u>591</u></b>	<b><u>16.3</u></b>	590	16.3	592	16.3	<b><u>545</u></b>	<b><u>17.7</u></b>	546	17.7	544	17.7
403.gcc	520	15.5	520	15.5	<b><u>520</u></b>	<b><u>15.5</u></b>	408	19.7	<b><u>407</u></b>	<b><u>19.8</u></b>	407	19.8
429.mcf	<b><u>408</u></b>	<b><u>22.4</u></b>	407	22.4	408	22.4	<b><u>378</u></b>	<b><u>24.1</u></b>	378	24.1	379	24.1
445.gobmk	521	20.2	521	20.1	<b><u>521</u></b>	<b><u>20.1</u></b>	480	21.9	<b><u>480</u></b>	<b><u>21.9</u></b>	480	21.9
456.hmmmer	593	15.7	<b><u>593</u></b>	<b><u>15.7</u></b>	594	15.7	342	27.3	342	27.3	<b><u>342</u></b>	<b><u>27.3</u></b>
458.sjeng	672	18.0	<b><u>675</u></b>	<b><u>17.9</u></b>	678	17.8	605	20.0	<b><u>608</u></b>	<b><u>19.9</u></b>	610	19.8
462.libquantum	363	57.1	<b><u>360</u></b>	<b><u>57.5</u></b>	353	58.6	198	105	202	103	<b><u>202</u></b>	<b><u>103</u></b>
464.h264ref	<b><u>718</u></b>	<b><u>30.8</u></b>	707	31.3	719	30.8	665	33.3	664	33.3	<b><u>664</u></b>	<b><u>33.3</u></b>
471.omnetpp	399	15.6	<b><u>399</u></b>	<b><u>15.6</u></b>	401	15.6	371	16.9	370	16.9	<b><u>370</u></b>	<b><u>16.9</u></b>
473.astar	464	15.1	<b><u>464</u></b>	<b><u>15.1</u></b>	462	15.2	424	16.6	420	16.7	<b><u>421</u></b>	<b><u>16.7</u></b>
483.xalanbmk	267	25.8	268	25.8	<b><u>268</u></b>	<b><u>25.8</u></b>	267	25.8	268	25.8	<b><u>268</u></b>	<b><u>25.8</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode  
OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"

## Base Compiler Invocation

C benchmarks:  
icc  
  
C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalanbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 25.0

PowerEdge M600 (Intel Xeon L5240, 3.00GHz)

SPECint\_base2006 = 20.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Optimization Flags

C benchmarks:

-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.015/bin/icc  
-L/opt/intel/cce/10.1.015/lib  
-I/opt/intel/cce/10.1.015/include

456.hmmer: /opt/intel/cce/10.1.015/bin/icc  
-L/opt/intel/cce/10.1.015/lib  
-I/opt/intel/cce/10.1.015/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 25.0

PowerEdge M600 (Intel Xeon L5240, 3.00GHz)

SPECint\_base2006 = 20.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 25.0

PowerEdge M600 (Intel Xeon L5240, 3.00GHz)

SPECint\_base2006 = 20.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: May-2008

Tested by: Dell Inc.

Software Availability: May-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 19:17:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 September 2008.