



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 247

ProLiant BL680c G5
(2.4 GHz, Intel Xeon E7450)

SPECint_rate_base2006 = 231

CPU2006 license: 3


Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

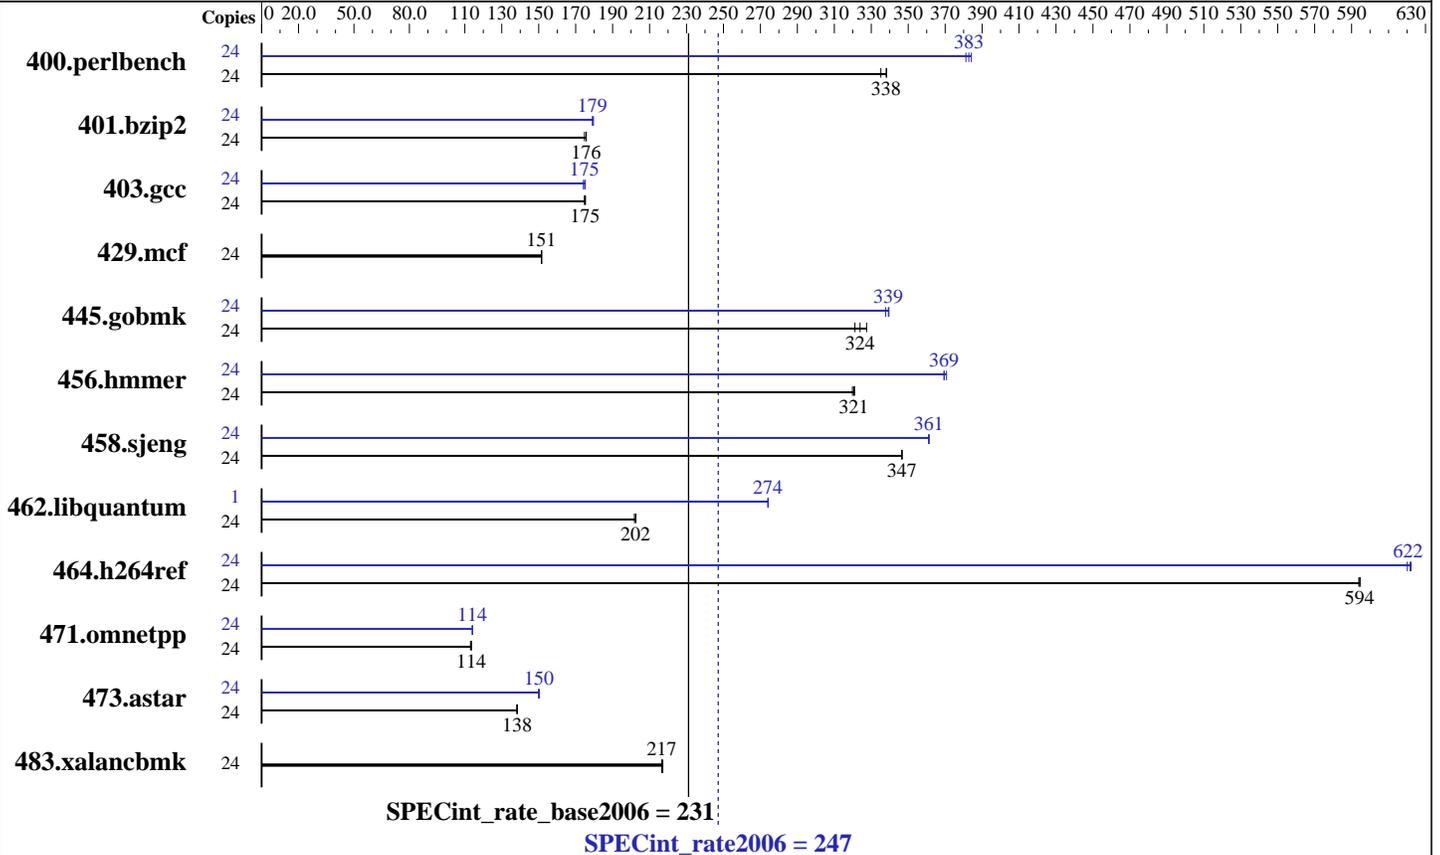

Hardware

CPU Name: Intel Xeon E7450
 CPU Characteristics: 2.40 GHz, 12 MB L3 shared, 1066 MHz system bus
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4 GB PC2-5300F CL5)
 Disk Subsystem: 1x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 247

ProLiant BL680c G5
(2.4 GHz, Intel Xeon E7450)

SPECint_rate_base2006 = 231

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	700	335	694	338	693	338	24	615	381	610	384	612	383
401.bzip2	24	1319	176	1325	175	1318	176	24	1293	179	1293	179	1289	180
403.gcc	24	1102	175	1103	175	1106	175	24	1109	174	1103	175	1105	175
429.mcf	24	1445	151	1443	152	1445	151	24	1445	151	1443	152	1445	151
445.gobmk	24	769	327	784	321	777	324	24	742	339	745	338	741	340
456.hammer	24	700	320	698	321	698	321	24	606	369	606	369	604	371
458.sjeng	24	838	347	838	347	838	347	24	804	361	804	361	804	361
462.libquantum	24	2464	202	2457	202	2455	203	1	75.6	274	75.6	274	75.6	274
464.h264ref	24	893	594	894	594	893	595	24	854	622	854	622	856	620
471.omnetpp	24	1327	113	1322	114	1321	114	24	1315	114	1315	114	1314	114
473.astar	24	1219	138	1217	138	1219	138	24	1123	150	1124	150	1121	150
483.xalancbmk	24	764	217	763	217	764	217	24	764	217	763	217	764	217

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode
Adjacent Sector Prefetch Disabled
Hardware Prefetcher Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 247

ProLiant BL680c G5
(2.4 GHz, Intel Xeon E7450)

SPECint_rate_base2006 = 231

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 247

ProLiant BL680c G5
(2.4 GHz, Intel Xeon E7450)

SPECint_rate_base2006 = 231

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 247

ProLiant BL680c G5
(2.4 GHz, Intel Xeon E7450)

SPECint_rate_base2006 = 231

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:41:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 September 2008.