



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G5  
(2.66 GHz, Intel Xeon X7460)

**SPECint\_rate2006 = 158**

**SPECint\_rate\_base2006 = 144**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

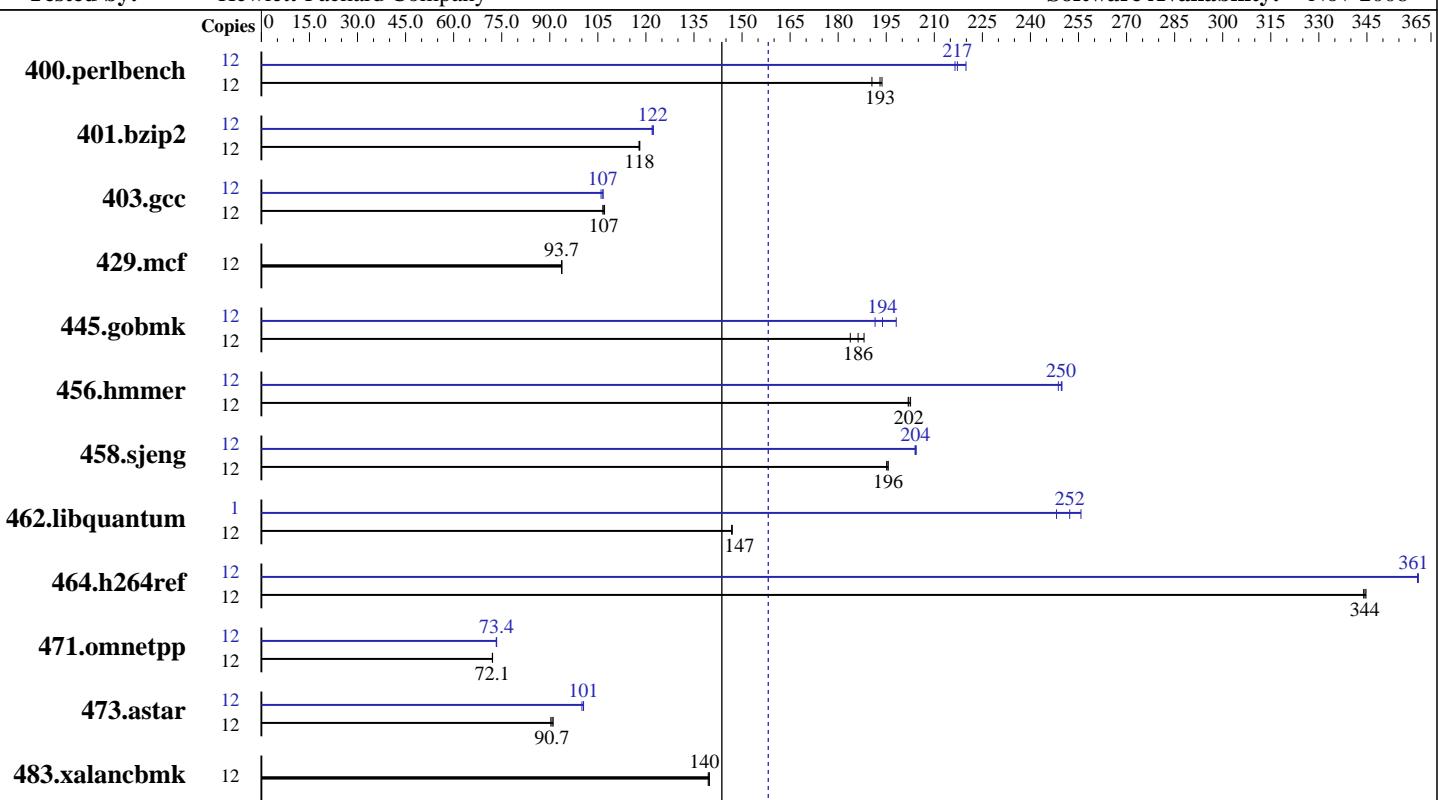

**SPECint\_rate\_base2006 = 144**

**SPECint\_rate2006 = 158**

### Hardware

CPU Name: Intel Xeon X7460  
CPU Characteristics: 2.66 GHz, 16 MB shared, 1333 MHz system bus  
CPU MHz: 2667  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (16x4 GB PC2-5300F CL5)  
Disk Subsystem: 1x146 GB 10 K SAS  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
Auto Parallel: Yes  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G5  
(2.66 GHz, Intel Xeon X7460)

**SPECint\_rate2006 = 158**

**SPECint\_rate\_base2006 = 144**

CPU2006 license: 3

Test date: Sep-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	615	191	<b>607</b>	<b>193</b>	605	194	12	542	216	<b>540</b>	<b>217</b>	533	220
401.bzip2	12	983	118	981	118	<b>982</b>	<b>118</b>	12	<b>948</b>	<b>122</b>	950	122	<b>947</b>	122
403.gcc	12	902	107	<b>904</b>	<b>107</b>	907	107	12	906	107	911	106	<b>906</b>	<b>107</b>
429.mcf	12	<b>1168</b>	<b>93.7</b>	1168	93.7	1167	93.8	12	<b>1168</b>	<b>93.7</b>	1168	93.7	1167	93.8
445.gobmk	12	669	188	<b>676</b>	<b>186</b>	685	184	12	635	198	657	192	<b>649</b>	<b>194</b>
456.hammer	12	553	203	555	202	<b>554</b>	<b>202</b>	12	450	249	448	250	<b>448</b>	<b>250</b>
458.sjeng	12	744	195	742	196	<b>743</b>	<b>196</b>	12	711	204	<b>711</b>	<b>204</b>	712	204
462.libquantum	12	<b>1694</b>	<b>147</b>	1694	147	1692	147	1	<b>82.1</b>	<b>252</b>	83.5	248	81.0	256
464.h264ref	12	<b>771</b>	<b>344</b>	770	345	772	344	12	<b>736</b>	<b>361</b>	736	361	736	361
471.omnetpp	12	1040	72.1	<b>1040</b>	<b>72.1</b>	1039	72.2	12	1022	73.4	<b>1022</b>	<b>73.4</b>	1023	73.3
473.astar	12	933	90.3	<b>929</b>	<b>90.7</b>	925	91.1	12	842	100	838	101	<b>838</b>	<b>101</b>
483.xalancbmk	12	594	139	592	140	<b>593</b>	<b>140</b>	12	594	139	592	140	<b>593</b>	<b>140</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 462.libquantum peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G5  
(2.66 GHz, Intel Xeon X7460)

**SPECint\_rate2006 = 158**

**SPECint\_rate\_base2006 = 144**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

## Base Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmr: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G5  
(2.66 GHz, Intel Xeon X7460)

**SPECint\_rate2006 = 158**

**SPECint\_rate\_base2006 = 144**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
               -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
               -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
                  -opt-malloc-options=3 -parallel -par-runtime-control
                  -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -ansi-alias -opt-ra-region-strategy=block
               -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
               -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G5  
(2.66 GHz, Intel Xeon X7460)

**SPECint\_rate2006 = 158**

**SPECint\_rate\_base2006 = 144**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:55:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 October 2008.