



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 30.0

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECint_base2006 = 26.2

CPU2006 license: 3


Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

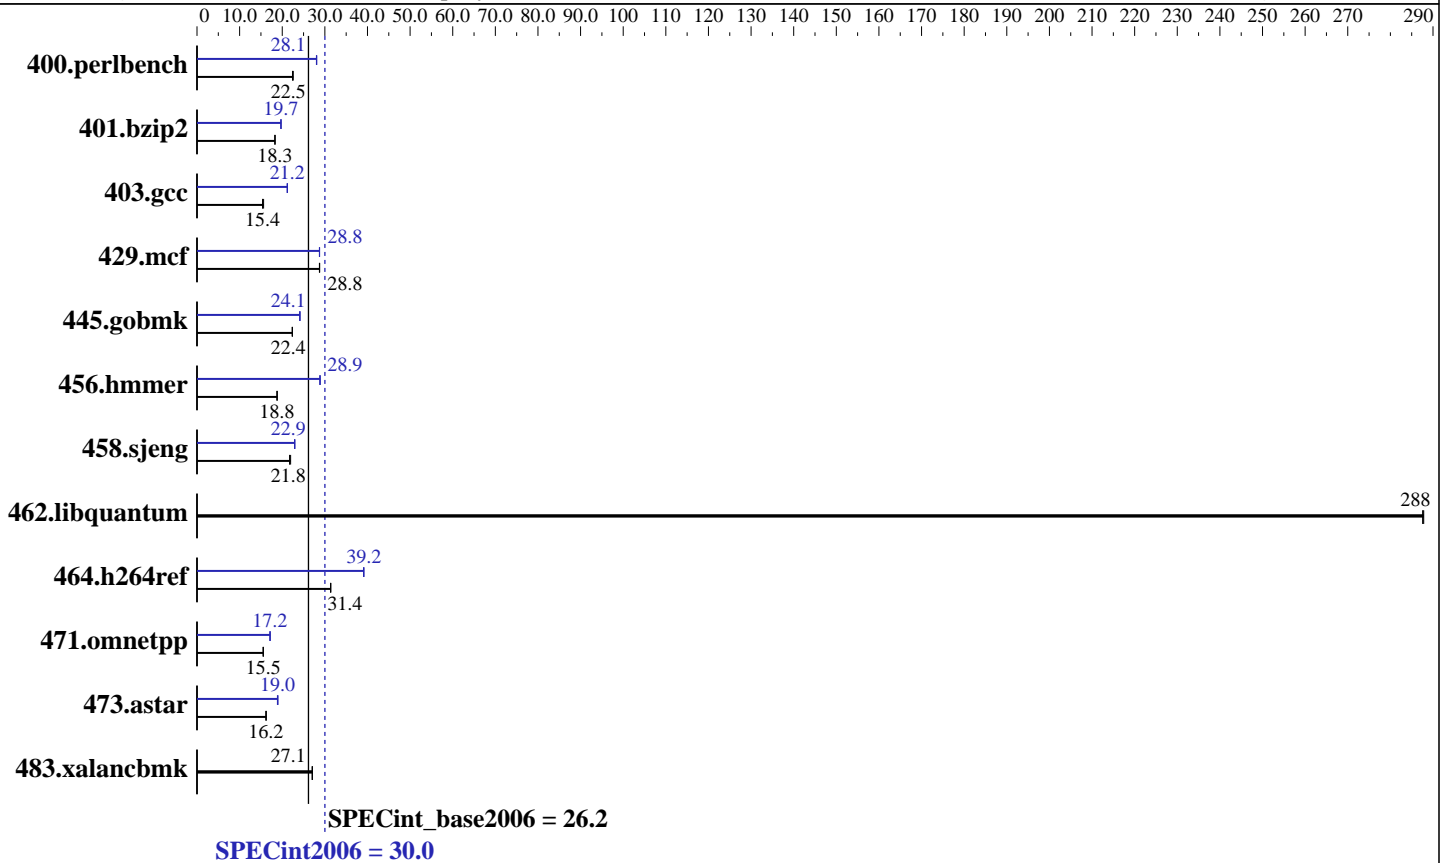

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics: 3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F CL5)
 Disk Subsystem: 1x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **30.0**

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECint_base2006 = **26.2**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	433	22.6	435	22.5	436	22.4	348	28.1	349	28.0	348	28.1
401.bzip2	528	18.3	528	18.3	527	18.3	490	19.7	489	19.7	490	19.7
403.gcc	522	15.4	515	15.6	523	15.4	380	21.2	380	21.2	380	21.2
429.mcf	318	28.7	317	28.8	317	28.8	318	28.7	317	28.8	317	28.8
445.gobmk	469	22.4	469	22.4	469	22.4	435	24.1	435	24.1	434	24.2
456.hmmmer	496	18.8	497	18.8	496	18.8	323	28.9	323	28.9	323	28.8
458.sjeng	556	21.8	551	22.0	557	21.7	527	22.9	529	22.9	527	23.0
462.libquantum	72.0	288	72.0	288	72.0	288	72.0	288	72.0	288	72.0	288
464.h264ref	705	31.4	706	31.4	706	31.4	565	39.2	565	39.2	566	39.1
471.omnetpp	402	15.6	402	15.5	402	15.5	364	17.2	364	17.2	366	17.1
473.astar	432	16.3	434	16.2	433	16.2	370	19.0	372	18.9	370	19.0
483.xalancbmk	255	27.0	255	27.1	255	27.1	255	27.0	255	27.1	255	27.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 30.0

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECint_base2006 = 26.2

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbenc: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 30.0

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECint_base2006 = 26.2

CPU2006 license: 3

Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.33 GHz, Intel Xeon X5470)

SPECint2006 = 30.0

SPECint_base2006 = 26.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.html>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.xml>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:57:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 October 2008.