



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 294

IBM System x3850 M2 (Intel Xeon X7460)

SPECint_rate_base2006 = 274

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

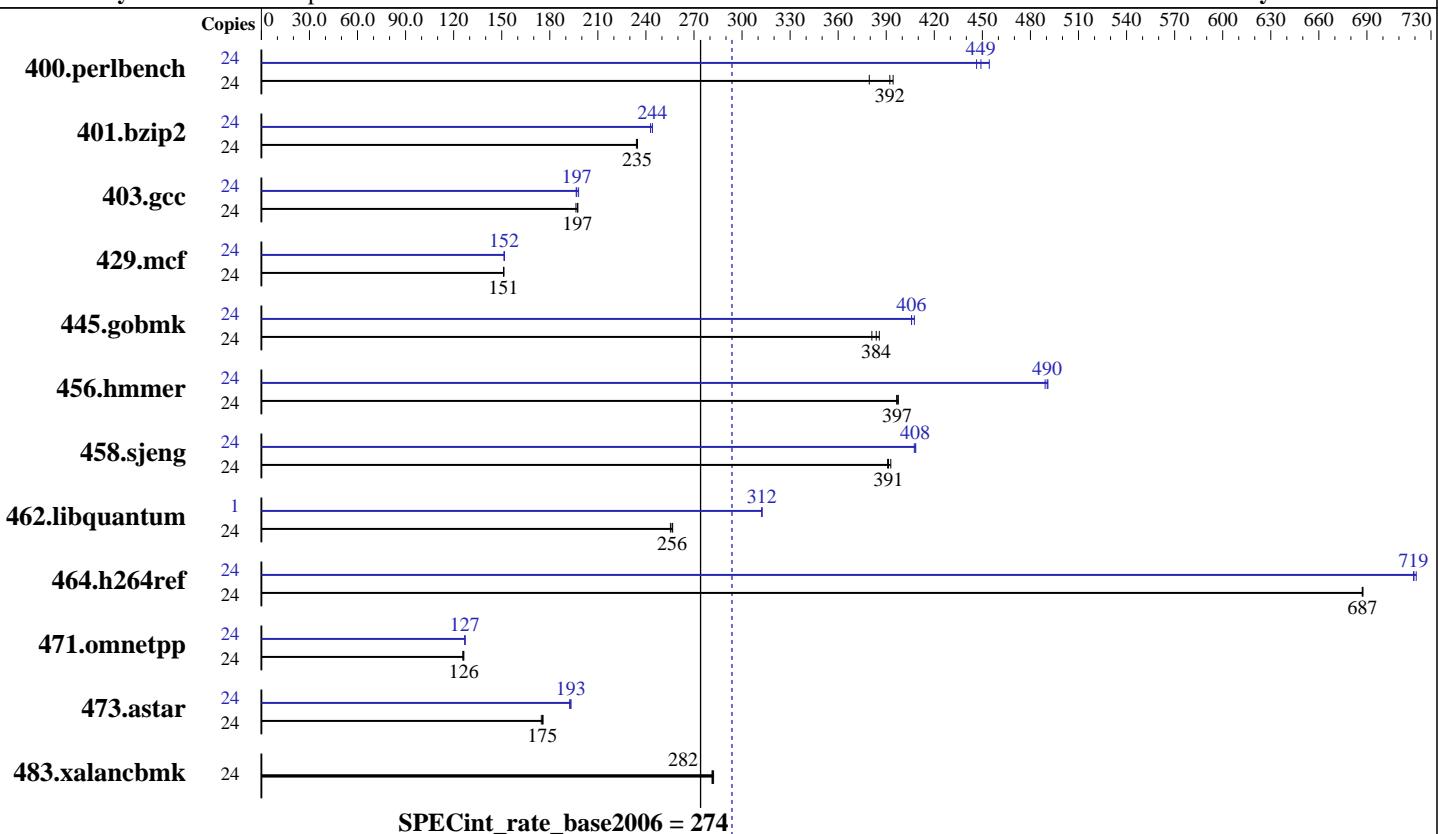

Hardware

CPU Name: Intel Xeon X7460
 CPU Characteristics:
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16 x 4 GB PC2-5300P)
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 294

IBM System x3850 M2 (Intel Xeon X7460)

SPECint_rate_base2006 = 274

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	618	379	598	392	595	394	24	522	449	516	454	525	446
401.bzip2	24	989	234	987	235	987	235	24	949	244	949	244	954	243
403.gcc	24	984	196	979	197	978	197	24	981	197	983	197	976	198
429.mcf	24	1448	151	1447	151	1446	151	24	1444	152	1445	152	1443	152
445.gobmk	24	661	381	653	386	656	384	24	618	408	620	406	620	406
456.hammer	24	563	398	564	397	565	396	24	458	489	456	491	457	490
458.sjeng	24	742	391	743	391	739	393	24	711	408	712	408	713	408
462.libquantum	24	1948	255	1940	256	1937	257	1	66.3	312	66.3	312	66.3	312
464.h264ref	24	773	687	773	687	773	687	24	739	719	737	721	738	719
471.omnetpp	24	1193	126	1188	126	1188	126	24	1181	127	1181	127	1180	127
473.astar	24	958	176	964	175	960	175	24	872	193	876	192	873	193
483.xalancbmk	24	588	282	587	282	589	281	24	588	282	587	282	589	281

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

taskset was used to bind processes to cores except for 462.libquantum peak

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode

OMP_NUM_THREADS set to number of processors

KMP_AFFINITY set to "physical,0"

KMP_STACKSIZE set to 64M

Hardware Prefetch Disabled, Adjacent Sector Prefetch Disabled

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 294

IBM System x3850 M2 (Intel Xeon X7460)

SPECint_rate_base2006 = 274

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmr: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 294

IBM System x3850 M2 (Intel Xeon X7460)

SPECint_rate_base2006 = 274

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
            -no-prec-div -ansi-alias

456.hmmr: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll12
            -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
            -no-prec-div -static -unroll14

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
                -opt-malloc-options=3 -parallel -par-runtime-control
                -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
              -no-prec-div -static -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
              -no-prec-div -ansi-alias -opt-ra-region-strategy=block
              -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
            -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
            -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 294

IBM System x3850 M2 (Intel Xeon X7460)

SPECint_rate_base2006 = 274

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.html>
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.04.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:51:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 October 2008.