



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

**SPECint®2006 = 30.2**

## Supermicro X7DB8+ (Intel Xeon X5270)

**SPECint\_base2006 = 26.5**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

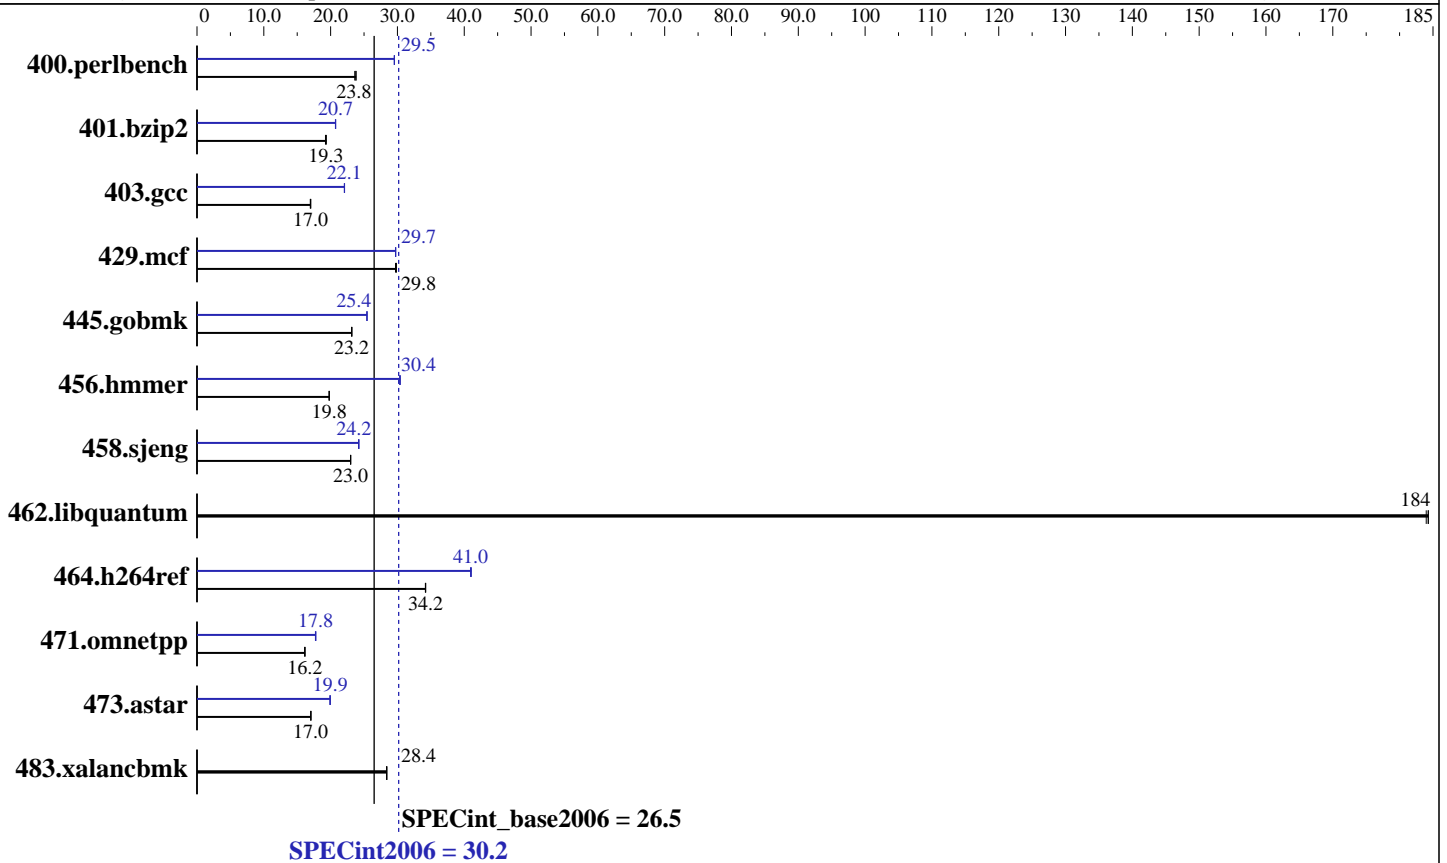

### Hardware

CPU Name: Intel Xeon X5270  
 CPU Characteristics:  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB(8x2 GB Samsung 5300F, CL5-5-5, 2 rank, ECC)  
 Disk Subsystem: 36.4 GB HP SCSI, 15K RPM  
 Other Hardware: None

### Software

Operating System: SuSe Linux SLES10 SP2  
 Compiler: Intel C++ Compiler 11.0 for Linux  
 Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 30.2

Supermicro X7DB8+ (Intel Xeon X5270)

SPECint\_base2006 = 26.5

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	410	23.8	<b><u>411</u></b>	<b><u>23.8</u></b>	414	23.6	331	29.5	331	29.6	<b><u>331</u></b>	<b><u>29.5</u></b>
401.bzip2	499	19.4	502	19.2	<b><u>500</u></b>	<b><u>19.3</u></b>	<b><u>465</u></b>	<b><u>20.7</u></b>	465	20.8	466	20.7
403.gcc	473	17.0	475	17.0	<b><u>474</u></b>	<b><u>17.0</u></b>	365	22.1	364	22.1	<b><u>365</u></b>	<b><u>22.1</u></b>
429.mcf	307	29.7	306	29.8	<b><u>306</u></b>	<b><u>29.8</u></b>	307	29.7	<b><u>307</u></b>	<b><u>29.7</u></b>	307	29.7
445.gobmk	453	23.1	453	23.2	<b><u>453</u></b>	<b><u>23.2</u></b>	412	25.4	412	25.4	<b><u>412</u></b>	<b><u>25.4</u></b>
456.hmmmer	471	19.8	472	19.8	<b><u>471</u></b>	<b><u>19.8</u></b>	308	30.3	<b><u>307</u></b>	<b><u>30.4</u></b>	307	30.4
458.sjeng	526	23.0	<b><u>526</u></b>	<b><u>23.0</u></b>	527	23.0	<b><u>500</u></b>	<b><u>24.2</u></b>	500	24.2	499	24.2
462.libquantum	113	184	<b><u>112</u></b>	<b><u>184</u></b>	112	184	113	184	<b><u>112</u></b>	<b><u>184</u></b>	112	184
464.h264ref	646	34.2	647	34.2	<b><u>647</u></b>	<b><u>34.2</u></b>	<b><u>540</u></b>	<b><u>41.0</u></b>	540	41.0	539	41.1
471.omnetpp	386	16.2	388	16.1	<b><u>387</u></b>	<b><u>16.2</u></b>	353	17.7	<b><u>352</u></b>	<b><u>17.8</u></b>	352	17.8
473.astar	<b><u>412</u></b>	<b><u>17.0</u></b>	412	17.0	411	17.1	353	19.9	<b><u>352</u></b>	<b><u>19.9</u></b>	352	20.0
483.xalancbmk	<b><u>243</u></b>	<b><u>28.4</u></b>	243	28.4	243	28.4	<b><u>243</u></b>	<b><u>28.4</u></b>	243	28.4	243	28.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer,  
 for peak, are compiled in 64-bit mode  
 OMP\_NUM\_THREADS set to number of processors  
 KMP\_AFFINITY set to "physical,0"  
 Adjacent Cache Line Prefetcher: Enabled

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 30.2

Supermicro X7DB8+ (Intel Xeon X5270)

SPECint\_base2006 = 26.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

## Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

```
456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

C++ benchmarks:

icpc

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
401.bzip2: -DSPEC_CPU_LP64  
456.hmmer: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 30.2

Supermicro X7DB8+ (Intel Xeon X5270)

SPECint\_base2006 = 26.5

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.06.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 30.2

Supermicro X7DB8+ (Intel Xeon X5270)

SPECint\_base2006 = 26.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.06.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:04:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 October 2008.