



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint®_rate2006 = 289

Sun Fire X4450 (Intel Xeon X7460 2.66GHz)

SPECint_rate_base2006 = 266

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

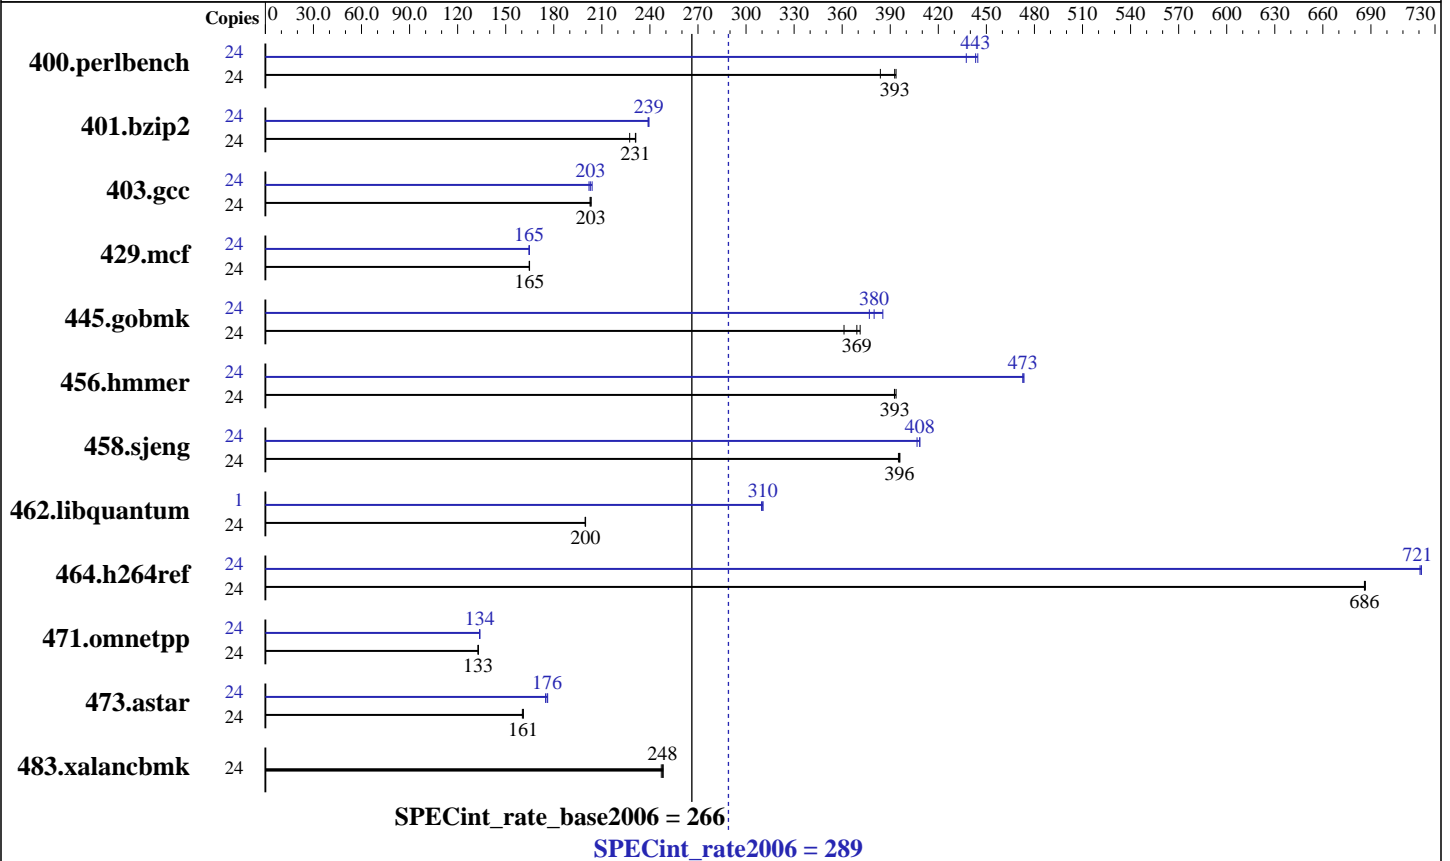

Hardware

CPU Name: Intel Xeon X7460
 CPU Characteristics:
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1xSAS, 72 GB, 10K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502
 Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 289

Sun Fire X4450 (Intel Xeon X7460 2.66GHz)

SPECint_rate_base2006 = 266

CPU2006 license: 6

Test date: Aug-2008

Test sponsor: Sun Microsystems

Hardware Availability: Sep-2008

Tested by: Sun Microsystems

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	611	384	<u>597</u>	<u>393</u>	596	394	24	527	445	<u>529</u>	<u>443</u>	536	437
401.bzip2	24	1019	227	1002	231	<u>1003</u>	<u>231</u>	24	<u>968</u>	<u>239</u>	970	239	968	239
403.gcc	24	953	203	<u>952</u>	<u>203</u>	950	203	24	957	202	947	204	<u>953</u>	<u>203</u>
429.mcf	24	<u>1329</u>	<u>165</u>	1327	165	1329	165	24	<u>1329</u>	<u>165</u>	1329	165	1329	165
445.gobmk	24	697	361	678	371	<u>682</u>	<u>369</u>	24	<u>663</u>	<u>380</u>	653	385	668	377
456.hmmmer	24	569	394	570	393	<u>570</u>	<u>393</u>	24	<u>474</u>	<u>473</u>	474	473	473	473
458.sjeng	24	735	395	<u>734</u>	<u>396</u>	733	396	24	714	407	711	408	<u>711</u>	<u>408</u>
462.libquantum	24	2492	200	<u>2489</u>	<u>200</u>	2488	200	1	66.7	311	<u>66.7</u>	<u>310</u>	66.9	310
464.h264ref	24	774	686	774	687	<u>774</u>	<u>686</u>	24	736	721	<u>736</u>	<u>721</u>	737	721
471.omnetpp	24	1130	133	1128	133	<u>1129</u>	<u>133</u>	24	1122	134	<u>1121</u>	<u>134</u>	1121	134
473.astar	24	<u>1047</u>	<u>161</u>	1050	160	1047	161	24	956	176	<u>958</u>	<u>176</u>	963	175
483.xalancbmk	24	<u>668</u>	<u>248</u>	667	248	670	247	24	<u>668</u>	<u>248</u>	667	248	670	247

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

taskset was used to bind processes to cores except for 462.libquantum peak

'ulimit -s unlimited' was used to set the stacksize to unlimited

OMP_NUM_THREADS set to number of cores.

KMP_STACKSIZE set to 64M

KMP_AFFINITY set to physical,0

Platform Notes

Default BIOS settings were used.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 289

Sun Fire X4450 (Intel Xeon X7460 2.66GHz)

SPECint_rate_base2006 = 266

CPU2006 license: 6

Test date: Aug-2008

Test sponsor: Sun Microsystems

Hardware Availability: Sep-2008

Tested by: Sun Microsystems

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 289

Sun Fire X4450 (Intel Xeon X7460 2.66GHz)

SPECint_rate_base2006 = 266

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
 -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
 -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
 -opt-malloc-options=3 -parallel -par-runtime-control
 -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -ansi-alias -opt-ra-region-strategy=block
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 289

Sun Fire X4450 (Intel Xeon X7460 2.66GHz)

SPECint_rate_base2006 = 266

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.07.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.07.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:49:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 October 2008.