



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = Not Run

PowerEdge 1950 III (Intel Xeon X5470, 3.33 GHz)

SPECint\_rate\_base2006 = 139

CPU2006 license: 55


Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

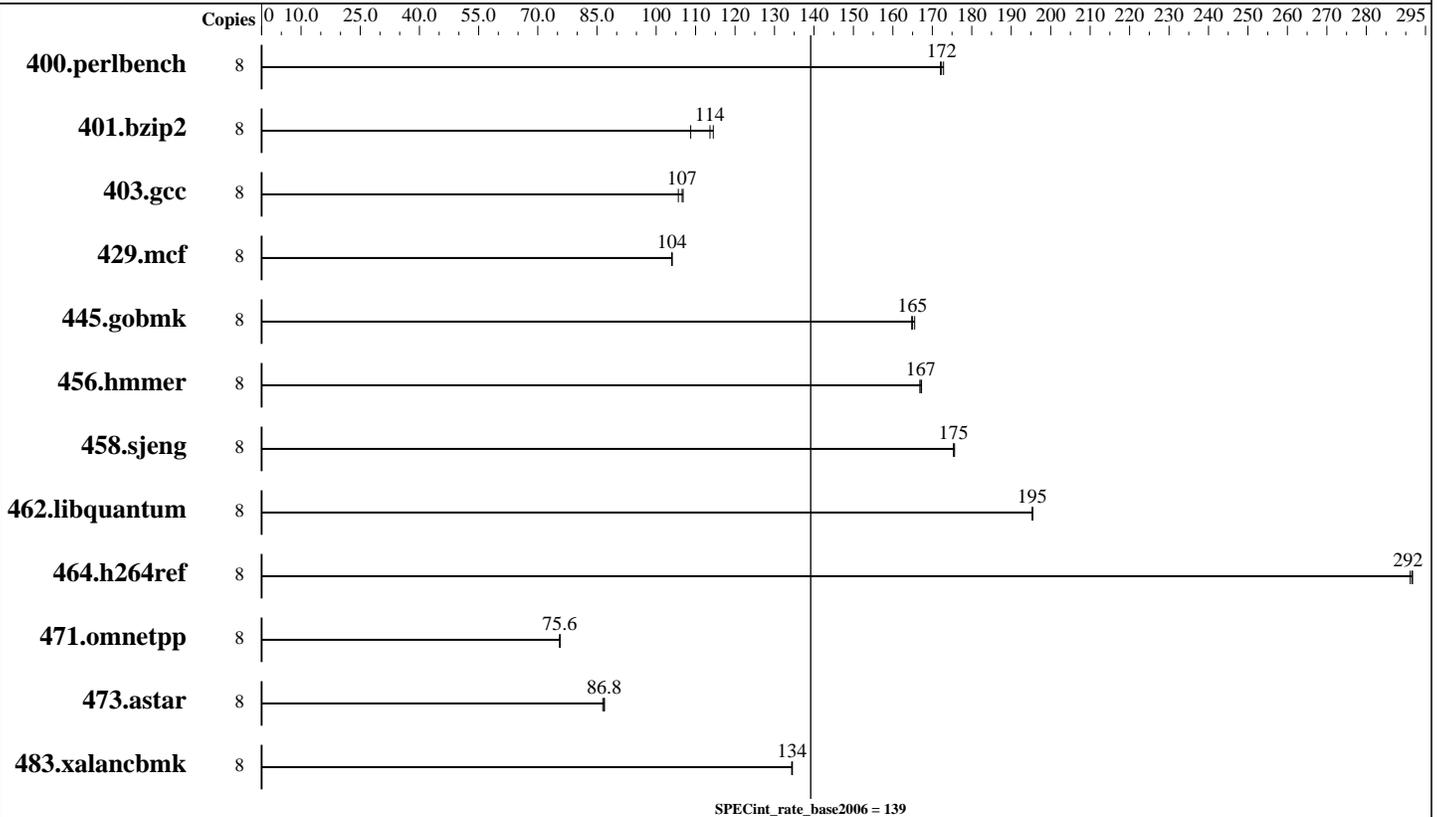

## Hardware

CPU Name: Intel Xeon X5470  
 CPU Characteristics: 3333  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2GB 667 MHz ECC CL5 FB-DIMM)  
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: Binutils 2.18.50.0.7.20080502, Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge 1950 III (Intel Xeon X5470, 3.33 GHz)

SPECint\_rate\_base2006 = 139

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>454</b>	<b>172</b>	454	172	452	173							
401.bzip2	8	710	109	674	114	<b>679</b>	<b>114</b>							
403.gcc	8	<b>604</b>	<b>107</b>	603	107	610	106							
429.mcf	8	702	104	<b>701</b>	<b>104</b>	701	104							
445.gobmk	8	<b>509</b>	<b>165</b>	507	166	509	165							
456.hmmmer	8	<b>447</b>	<b>167</b>	446	167	447	167							
458.sjeng	8	<b>552</b>	<b>175</b>	551	176	552	175							
462.libquantum	8	<b>849</b>	<b>195</b>	849	195	848	195							
464.h264ref	8	<b>607</b>	<b>292</b>	607	292	608	291							
471.omnetpp	8	662	75.6	<b>661</b>	<b>75.6</b>	661	75.6							
473.astar	8	646	86.9	649	86.5	<b>647</b>	<b>86.8</b>							
483.xalancbmk	8	410	135	411	134	<b>410</b>	<b>134</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 462.libquantum peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

BIOS Settings:  
Hardware Prefetcher = Disabled (Default = Enabled)  
Adjacent Cache Line Prefetch = Disabled (Default = Enabled)

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer,  
for peak, are compiled in 64-bit mode

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge 1950 III (Intel Xeon X5470, 3.33 GHz)

SPECint\_rate\_base2006 = 139

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge 1950 III (Intel Xeon X5470, 3.33 GHz)

SPECint\_rate\_base2006 = 139

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 22:13:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 October 2008.