



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 70.3

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 65.4

CPU2006 license: 55


Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

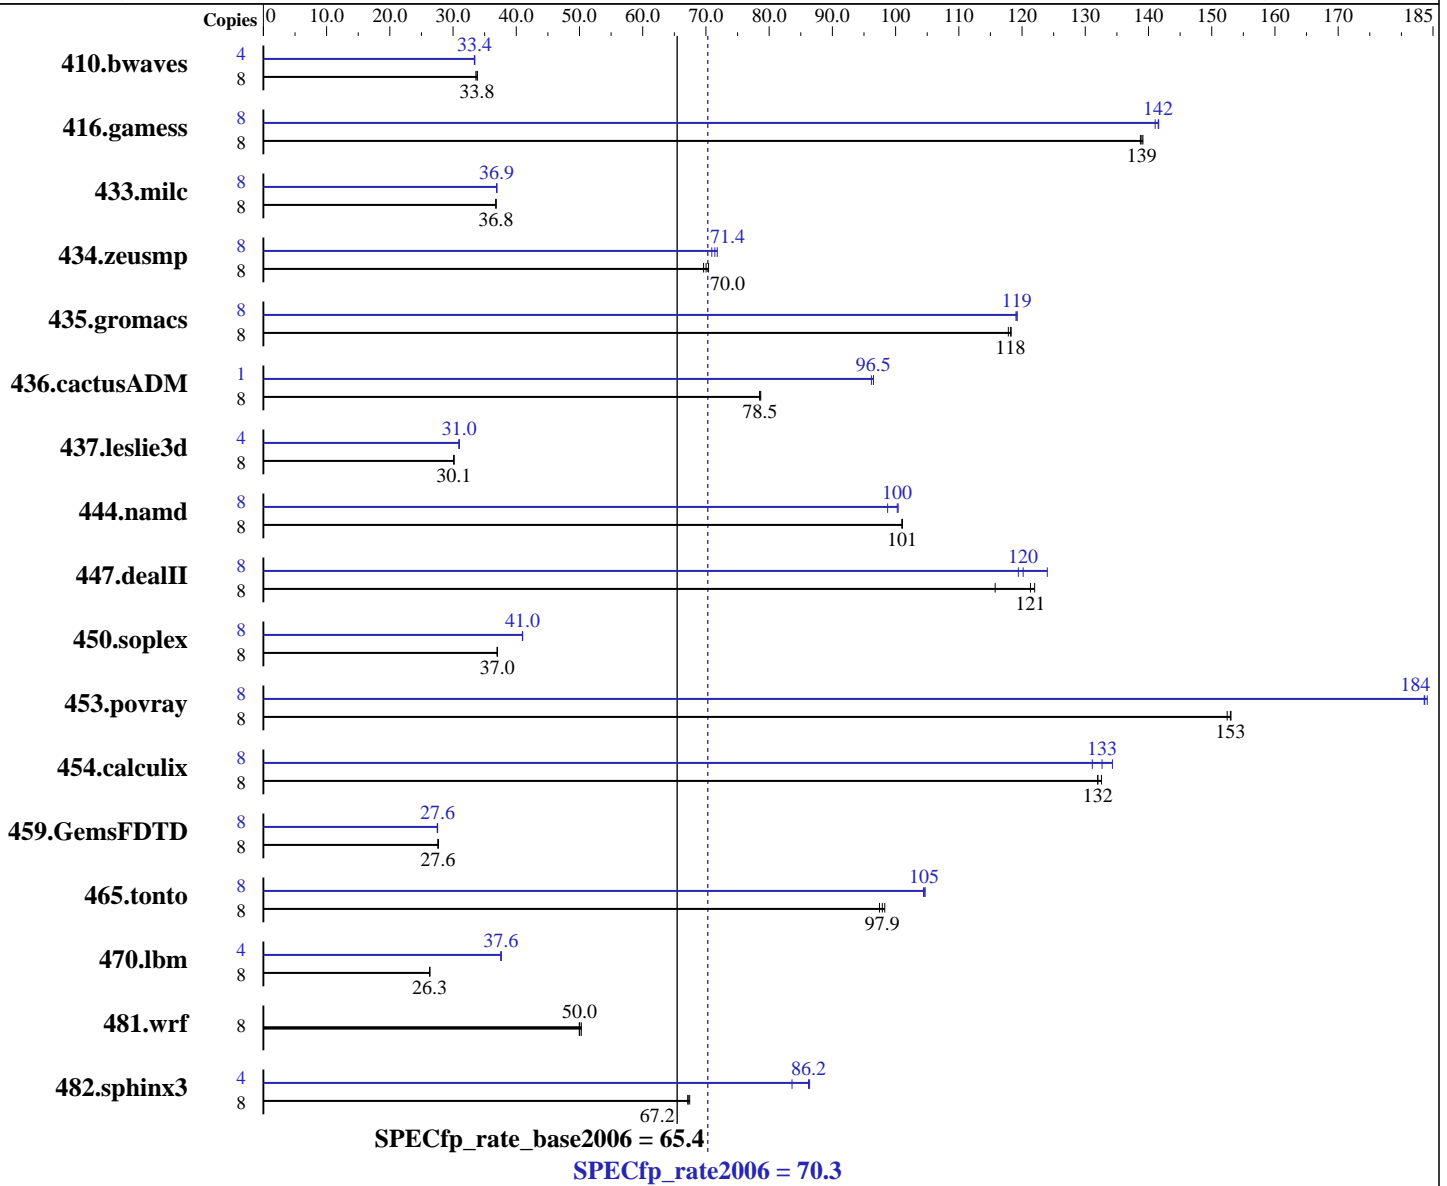

Hardware

CPU Name: Intel Xeon E5410
 CPU Characteristics: 2333
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cc_b_11.0.042, l_fc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.3

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 65.4

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4 GB, DDR2-667 MHz, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 80 GB SATA 5400 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3235	33.6	3213	33.8	3216	33.8	4	1625	33.4	1627	33.4	1629	33.4
416.gamess	8	1129	139	1126	139	1127	139	8	1110	141	1106	142	1107	142
433.milc	8	1996	36.8	1996	36.8	1996	36.8	8	1989	36.9	1990	36.9	1990	36.9
434.zeusmp	8	1034	70.4	1046	69.6	1040	70.0	8	1019	71.4	1014	71.8	1026	70.9
435.gromacs	8	485	118	483	118	483	118	8	479	119	480	119	479	119
436.cactusADM	8	1217	78.5	1215	78.7	1218	78.5	1	124	96.5	124	96.5	124	96.2
437.leslie3d	8	2495	30.1	2496	30.1	2494	30.1	4	1216	30.9	1213	31.0	1214	31.0
444.namd	8	635	101	635	101	635	101	8	639	100	650	98.7	640	100
447.dealII	8	750	122	754	121	791	116	8	766	119	762	120	738	124
450.soplex	8	1804	37.0	1802	37.0	1804	37.0	8	1629	41.0	1628	41.0	1627	41.0
453.povray	8	278	153	279	152	278	153	8	232	184	232	184	231	184
454.calculix	8	500	132	498	133	500	132	8	503	131	498	133	491	134
459.GemsFDTD	8	3071	27.6	3066	27.7	3075	27.6	8	3087	27.5	3081	27.6	3080	27.6
465.tonto	8	808	97.5	804	97.9	801	98.3	8	753	105	752	105	754	104
470.lbm	8	4182	26.3	4176	26.3	4175	26.3	4	1461	37.6	1462	37.6	1463	37.6
481.wrf	8	1777	50.3	1789	50.0	1786	50.0	8	1777	50.3	1789	50.0	1786	50.0
482.sphinx3	8	2312	67.4	2323	67.1	2320	67.2	4	902	86.4	904	86.2	932	83.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

BIOS Settings:

Hardware Prefetcher = Disabled (Default = Enabled)

Adjacent Cache Line Prefetch = Disabled (Default = Enabled)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.3

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 65.4

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex and 482.sphinx3, at peak, are compiled in 32-bit mode
taskset was used to bind processes to cores except for 436.cactusADM peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.3

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 65.4

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.3

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 65.4

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -fno-alias
 470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
 -auto-ilp32
 482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -fno-alias -auto-ilp32
 447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
 450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-malloc-options=3
 453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
 416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll2 -Ob0 -ansi-alias
 -scalar-rep-
 434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static
 437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.3

PowerEdge M600 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate_base2006 = 65.4

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:14:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 October 2008.