



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 236

PowerEdge R900 (Intel Xeon L7455, 2.13 GHz)

SPECint_rate_base2006 = 222

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

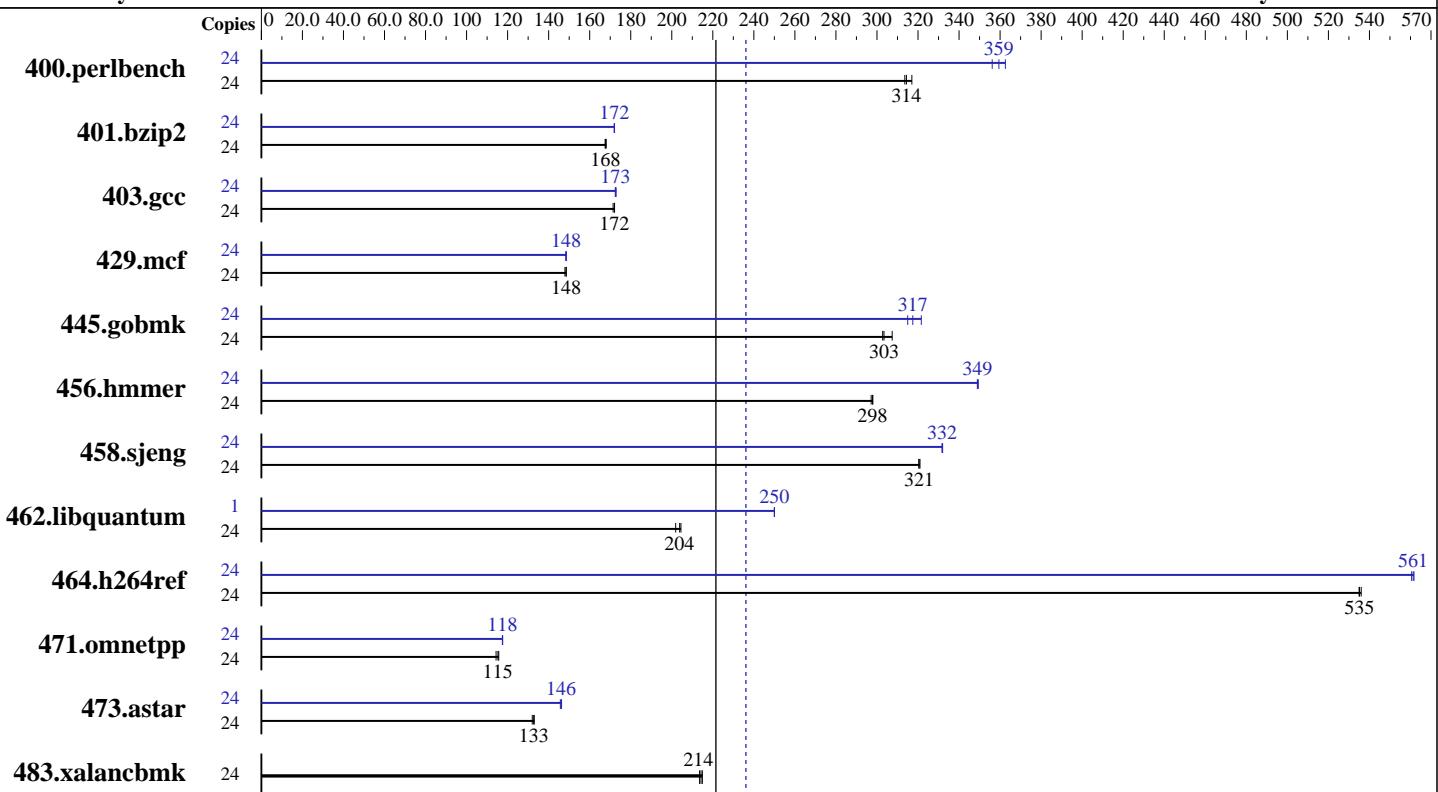

Hardware

CPU Name: Intel Xeon L7455
 CPU Characteristics:
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4GB DDR2-667 FBDIMM)
 Disk Subsystem: 2x36GB SAS 15000 RPM (RAID-0) for OS, 1x73GB SAS 10000 RPM for Benchmark
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 236

PowerEdge R900 (Intel Xeon L7455, 2.13 GHz)

SPECint_rate_base2006 = 222

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	748	314	746	314	740	317	24	647	363	652	359	658	356
401.bzip2	24	1383	168	1378	168	1381	168	24	1346	172	1347	172	1346	172
403.gcc	24	1127	171	1123	172	1123	172	24	1120	172	1120	173	1117	173
429.mcf	24	1480	148	1474	148	1473	149	24	1474	148	1475	148	1473	149
445.gobmk	24	819	307	830	303	831	303	24	783	322	799	315	793	317
456.hammer	24	753	297	751	298	752	298	24	641	349	642	349	642	349
458.sjeng	24	906	320	906	321	905	321	24	875	332	875	332	875	332
462.libquantum	24	2463	202	2440	204	2432	204	1	82.9	250	82.9	250	82.9	250
464.h264ref	24	991	536	993	535	992	535	24	946	561	948	561	946	562
471.omnetpp	24	1312	114	1301	115	1297	116	24	1277	117	1276	118	1276	118
473.astar	24	1276	132	1270	133	1267	133	24	1152	146	1156	146	1153	146
483.xalancbmk	24	775	214	773	214	771	215	24	775	214	773	214	771	215

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

BIOS Settings:

Hardware Prefetcher = Disabled (Default = Enabled)

Adjacent Cache Line Prefetch = Disabled (Default = Enabled)

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode
taskset was used to bind processes to cores except for 462.libquantum peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R900 (Intel Xeon L7455, 2.13 GHz)

SPECint_rate2006 = 236

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmr: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R900 (Intel Xeon L7455, 2.13 GHz)

SPECint_rate2006 = 236

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll12
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll12 -ansi-alias

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R900 (Intel Xeon L7455, 2.13 GHz)

SPECint_rate2006 = 236

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:18:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 October 2008.