



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


SPECint®_rate2006 = 363

IBM Power 560 Express (3.6 GHz, 16 core)

SPECint_rate_base2006 = 289

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

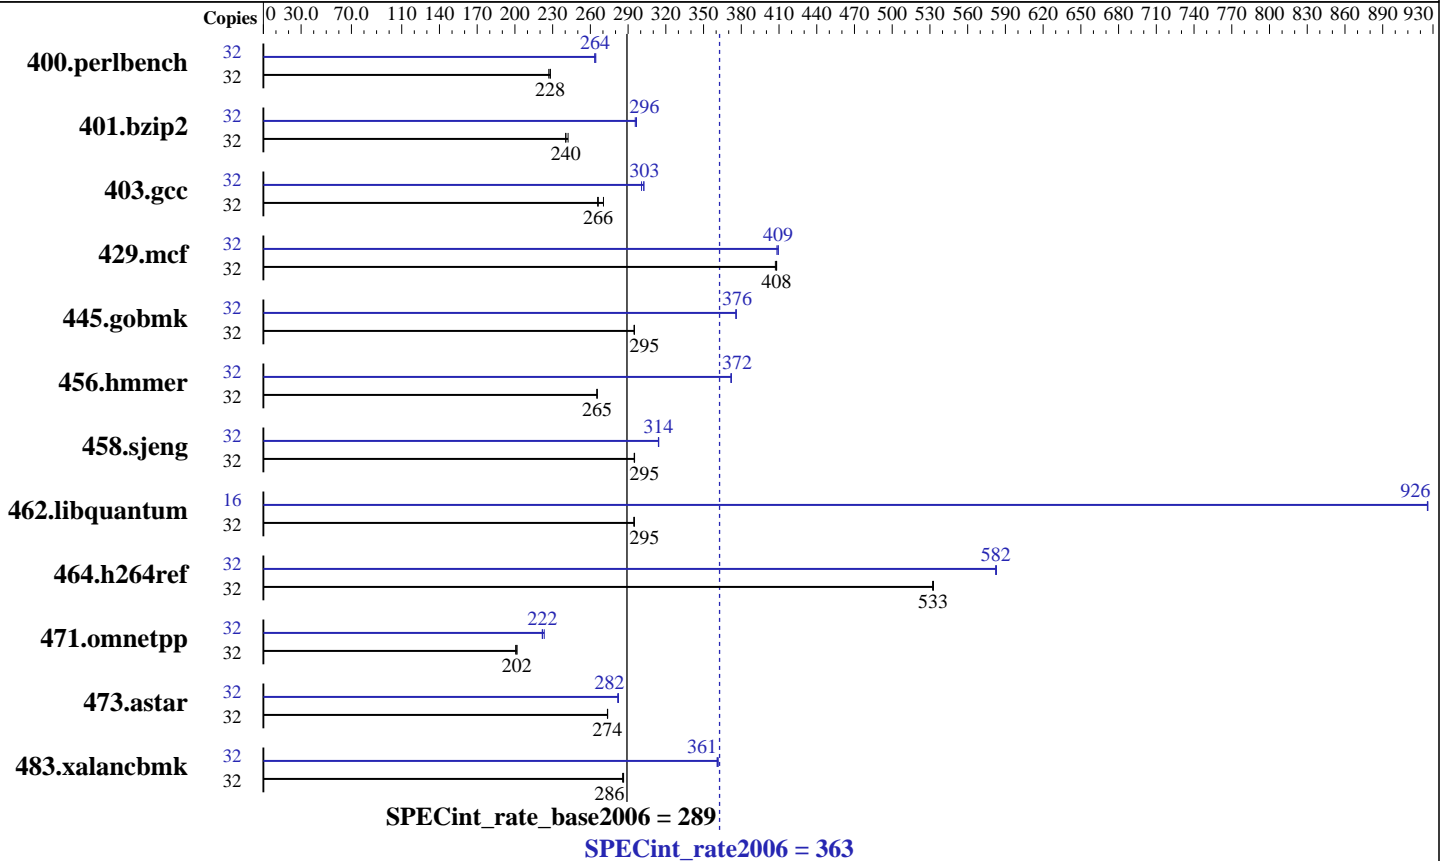

Hardware

CPU Name: POWER6+
 CPU Characteristics: 3600
 CPU MHz: Integrated
 FPU: 16 cores, 8 chips, 2 cores/chip, 2 threads/core
 CPU(s) enabled: 4,8,16 cores
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 4 MB I+D on chip per core
 Secondary Cache: 32 MB I+D off chip per chip
 L3 Cache: None
 Other Cache: 64 GB (32x2 GB) DDR2 667 MHz
 Memory: 4x146 GB SAS 15K RPM
 Disk Subsystem: None
 Other Hardware:

Software

Operating System: IBM AIX V6.1
 with the 6100-02 Technology Level
 IBM XL C/C++ V10.1 for AIX
 Compiler: No
 Auto Parallel: AIX/JFS2
 File System: Multi-user
 System State: 32-bit
 Base Pointers: 32/64-bit
 Peak Pointers: None
 Other Software:



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 363

IBM Power 560 Express (3.6 GHz, 16 core)

SPECint_rate_base2006 = 289

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	32	1370	228	1378	227	<u>1371</u>	<u>228</u>	32	1183	264	<u>1185</u>	<u>264</u>	1187	263		
401.bzip2	32	1275	242	1284	240	<u>1284</u>	<u>240</u>	32	1041	297	1044	296	<u>1042</u>	<u>296</u>		
403.gcc	32	<u>967</u>	<u>266</u>	969	266	953	270	32	857	301	852	303	<u>852</u>	<u>303</u>		
429.mcf	32	715	408	<u>715</u>	<u>408</u>	717	407	32	<u>713</u>	<u>409</u>	715	408	713	409		
445.gobmk	32	1138	295	<u>1138</u>	<u>295</u>	1138	295	32	893	376	<u>893</u>	<u>376</u>	893	376		
456.hmmer	32	1125	265	<u>1125</u>	<u>265</u>	1125	265	32	802	372	803	372	<u>802</u>	<u>372</u>		
458.sjeng	32	<u>1312</u>	<u>295</u>	1313	295	1312	295	32	1233	314	<u>1232</u>	<u>314</u>	1232	314		
462.libquantum	32	2251	295	<u>2249</u>	<u>295</u>	2247	295	16	<u>358</u>	<u>926</u>	358	926	358	926		
464.h264ref	32	1331	532	1329	533	<u>1330</u>	<u>533</u>	32	<u>1216</u>	<u>582</u>	1216	582	1215	583		
471.omnetpp	32	997	201	<u>992</u>	<u>202</u>	992	202	32	<u>901</u>	<u>222</u>	896	223	902	222		
473.astar	32	821	274	<u>821</u>	<u>274</u>	821	274	32	<u>796</u>	<u>282</u>	797	282	796	282		
483.xalancbmk	32	773	286	771	286	<u>771</u>	<u>286</u>	32	612	361	610	362	<u>612</u>	<u>361</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for 400.perlbench 401.bzip2 403.gcc 456.hmmer 458.sjeng
464.h264ref 471.omnetpp 473.astar 483.xalancbmk
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 445.gobmk
with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 429.mcf
with options -kr -lap -lro -nop -nopr -RC -tb -tlo -vro -lu 9 -rt 0.95 -sdpla 8
-sdpms 512 -shci 15 -si -sidf 45 -siht 10 -lun 13 -m ppc405 -vrox -gcpyp
fdpr binary optimization tool used for 462.libquantum
with options -bf -bp -dp -hr -kr -las -lro -nop -RC -RD -tlo -vro -A 32 -isf 12
-lu 9 -rt 0.00 -ihf 20 -sdp 9 -shci 90 -si -sidf 50 -vrox -dce

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
3200 16M large pages defined with vmo command



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 363

IBM Power 560 Express (3.6 GHz, 16 core)

SPECint_rate_base2006 = 289

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Platform Notes

System set to "Enhanced" mode when defining partition on HMC.

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY_AFFINITY = "MCM"

XLFRTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi
-qalloca -blpdata

C++ benchmarks:

-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Base Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 363

IBM Power 560 Express (3.6 GHz, 16 core)

SPECint_rate_base2006 = 289

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalanbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qalias=noansi -qfdpr -blpdata
401.bzip2: -bmaxdata:0x4fffffff -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qfdpr -blpdata
403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qalloca -qfdpr -blpdata
429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-blpdata
445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -D_ILS_MACROS -qfdpr -blpdata
456.hmmer: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qenablevmx -qvecnvol
-D_ILS_MACROS -qfdpr -bdatapsize:64K -bstacksize:64K
-btextpsize:64K
458.sjeng: -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS
-qfdpr -blpdata
462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata
464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr
-bdatapsize:64K -bstacksize:64K -btextpsize:64K

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 363

IBM Power 560 Express (3.6 GHz, 16 core)

SPECint_rate_base2006 = 289

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qalign=natural
-qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata

473.astar: -bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-qenablevmx -qvecnvml -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qinlglue
-D__IBM_FAST_VECTOR -blpdata

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-AIX.html>

<http://www.spec.org/cpu2006/flags/IBM-XL.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-AIX.xml>

<http://www.spec.org/cpu2006/flags/IBM-XL.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:34:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 October 2008.