



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 544

IBM Power 570 (5.0 GHz, 16 core)

SPECfp_rate_base2006 = 465

CPU2006 license: 11


Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

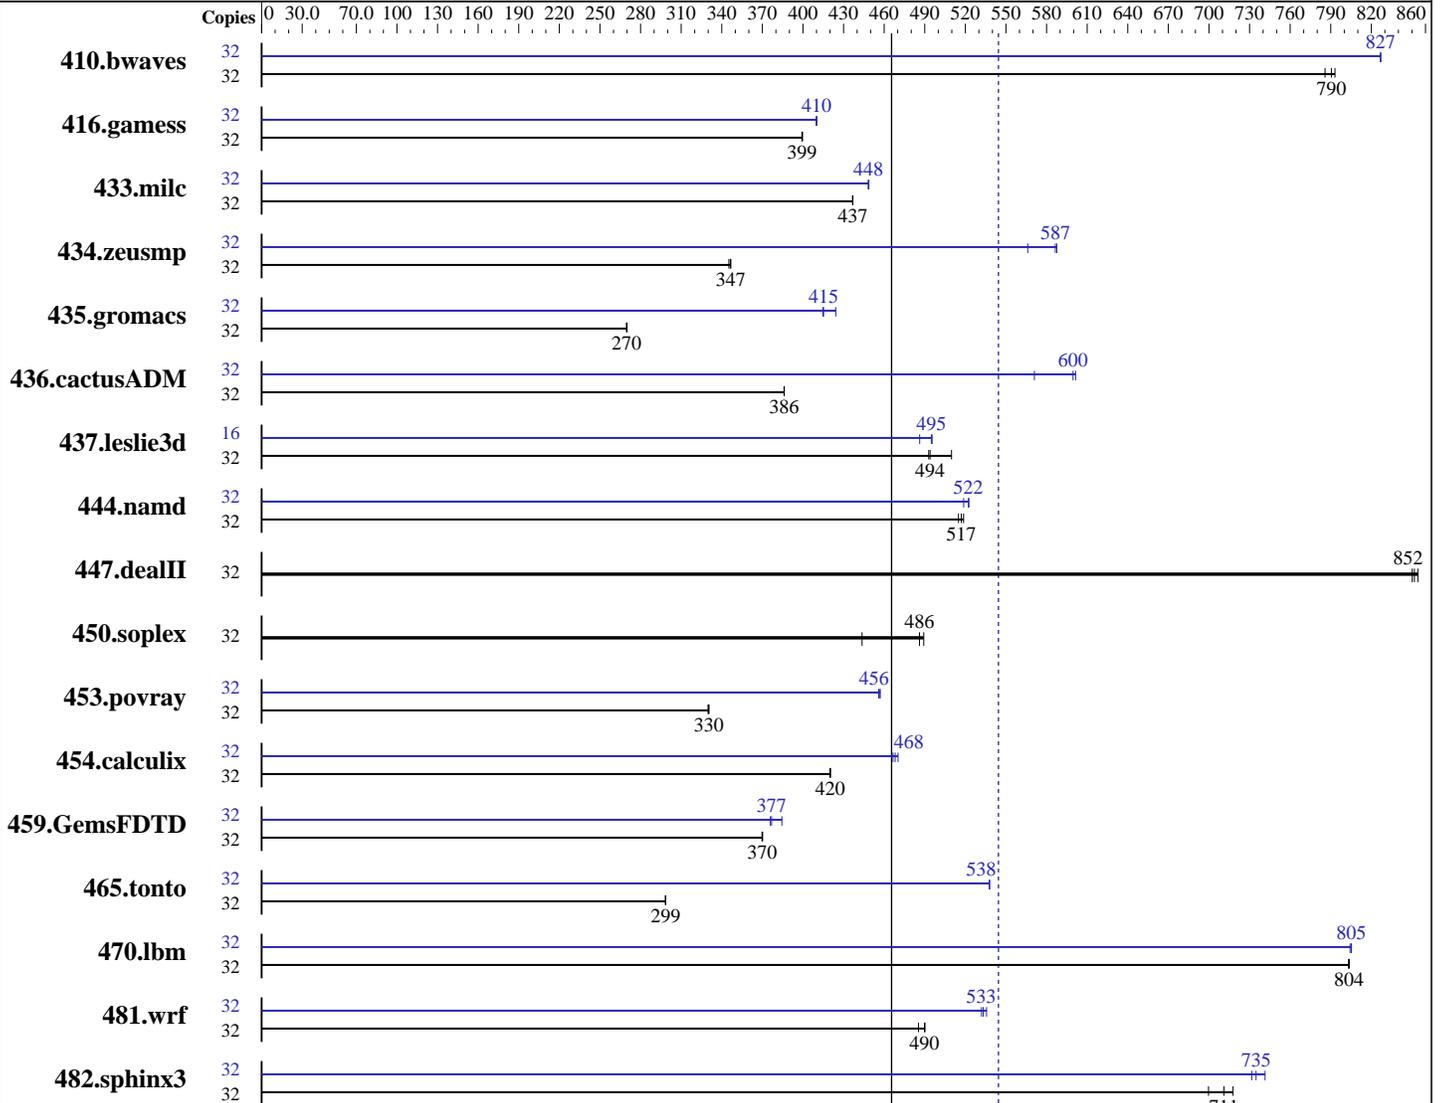

SPECfp_rate_base2006 = 465

SPECfp_rate2006 = 544

Hardware

CPU Name: POWER6+
 CPU Characteristics: 5000
 CPU MHz: Integrated
 FPU: 16 cores, 8 chips, 2 cores/chip, 2 threads/core
 CPU(s) enabled: 2,4,8,12,16 cores
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 4 MB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: IBM AIX V6.1
 with the 6100-02 Technology Level
 Compiler: IBM XL C/C++ V10.1 for AIX
 IBM XL Fortran V12.1 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 544

IBM Power 570 (5.0 GHz, 16 core)

SPECfp_rate_base2006 = 465

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 128 GB (64x2 GB) DDR2 667 MHz
Disk Subsystem: 4x73 GB 4x146 GB SAS 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	553	786	548	793	550	790	32	526	827	526	827	526	827		
416.gamess	32	1568	400	1569	399	1569	399	32	1528	410	1528	410	1529	410		
433.milc	32	672	437	673	437	672	437	32	655	448	655	449	655	448		
434.zeusmp	32	840	347	843	345	840	347	32	514	566	496	587	496	588		
435.gromacs	32	846	270	847	270	847	270	32	550	415	539	424	551	415		
436.cactusADM	32	991	386	990	386	990	386	32	670	571	638	600	636	601		
437.leslie3d	32	590	510	610	493	609	494	16	304	495	309	486	304	495		
444.namd	32	495	519	496	517	498	515	32	491	523	495	519	491	522		
447.dealII	32	430	852	428	854	431	850	32	430	852	428	854	431	850		
450.soplex	32	602	444	545	489	549	486	32	602	444	545	489	549	486		
453.povray	32	515	330	516	330	515	330	32	372	457	373	456	373	456		
454.calculix	32	628	420	628	420	629	420	32	566	467	564	468	561	470		
459.GemsFDTD	32	917	370	918	370	918	370	32	903	376	883	384	901	377		
465.tonto	32	1056	298	1055	299	1055	299	32	586	538	585	538	585	538		
470.lbm	32	547	803	547	804	547	804	32	546	805	547	804	546	805		
481.wrf	32	729	490	730	490	736	485	32	672	532	670	533	667	536		
482.sphinx3	32	891	700	877	711	869	718	32	849	735	841	741	852	732		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for 410.bwaves

with options -bf -bp -ece -lap -las -nop -nopr -pto -RC -RD -rmte -so -tlo -A 64

-lu 6 -rt 0.10 -ihf 60 -sdpla 32 -sdpms 32 -shci 10 -si -siht 15 -lun 32

fdpr binary optimization tool used for 433.milc 435.gromacs 437.leslie3d 453.povray

454.calculix 481.wrf 482.sphinx3

with options -O4 -vrox -pbsi

fdpr binary optimization tool used for 434.zeusmp 470.lbm

with options -O3 -vrox -sdp 9

fdpr binary optimization tool used for 459.GemsFDTD

with options -bf -bp -ece -hr -lap -nop -pca -RC -rmte -si -tb -tlo -vro -A 32 -rt 0.80

-hrf 0.05 -sdp 5 -sdpms 512 -shci 90 -lun 27 -rcctf 0.70 -rccrf 0.80 -rcaf 2



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 544

IBM Power 570 (5.0 GHz, 16 core)

SPECfp_rate_base2006 = 465

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
3200 16M large pages defined with vmo command

Platform Notes

System set to "Enhanced" mode when defining partition on HMC.

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 544

IBM Power 570 (5.0 GHz, 16 core)

SPECfp_rate_base2006 = 465

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap
-qalias=nostd -blpdata

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata

Base Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 544

IBM Power 570 (5.0 GHz, 16 core)

SPECfp_rate_base2006 = 465

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
 416.gamess: -qfixed
 434.zeusmp: -qfixed
 435.gromacs: -qfixed -qextname
 436.cactusADM: -qfixed -qextname
 437.leslie3d: -qfixed
 454.calculix: -qfixed -qextname
 481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
 482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -qfdpr -blpdata

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -blpdata

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS
-qalign=natural -qfdpr

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 544

IBM Power 570 (5.0 GHz, 16 core)

SPECfp_rate_base2006 = 465

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1
-qxlf90=nosignedzero -qfdpr -blpdata

437.leslie3d: -O5 -qlargepage -qenablevmx -qvecnv1 -qfdpr -blpdata

459.GemsFDTD: -O4 -qlargepage -q64 -qfdpr -blpdata

465.tonto: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-bdatapsize:64K -bstacksize:64K -btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qenablevmx -qvecnv1
-D_ILS_MACROS -qfdpr -qnostrict -bdatapsize:64K
-bstacksize:64K -btextpsize:64K

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

481.wrf: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 544

IBM Power 570 (5.0 GHz, 16 core)

SPECfp_rate_base2006 = 465

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-AIX.html>

<http://www.spec.org/cpu2006/flags/IBM-XL.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-AIX.xml>

<http://www.spec.org/cpu2006/flags/IBM-XL.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:35:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 October 2008.