



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S4, Intel Xeon X5470, 3.33 GHz

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 139

CPU2006 license: 22


Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

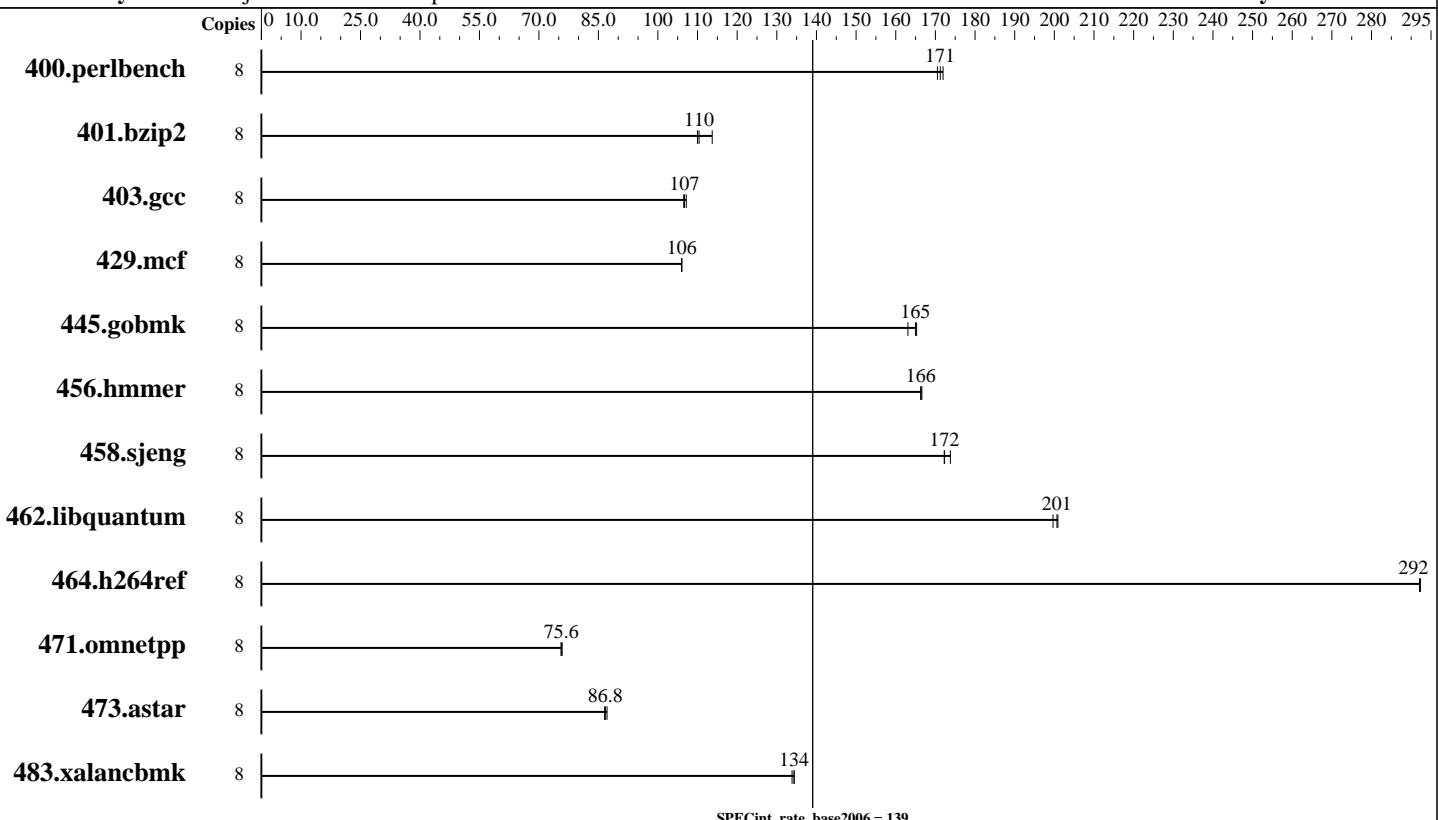

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x SATA, 160 GB, 7200 rpm
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap Library, Version 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S4, Intel Xeon X5470, 3.33 GHz

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 139

CPU2006 license: 22

Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|------------|-------------|------------|------------|------------|-------------|--------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 8 | 456 | 171 | 455 | 172 | 458 | 171 | | | | | | | |
| 401.bzip2 | 8 | 702 | 110 | 699 | 110 | 679 | 114 | | | | | | | |
| 403.gcc | 8 | 603 | 107 | 601 | 107 | 605 | 107 | | | | | | | |
| 429.mcf | 8 | 688 | 106 | 688 | 106 | 688 | 106 | | | | | | | |
| 445.gobmk | 8 | 515 | 163 | 509 | 165 | 508 | 165 | | | | | | | |
| 456.hmmer | 8 | 449 | 166 | 449 | 166 | 448 | 167 | | | | | | | |
| 458.sjeng | 8 | 557 | 174 | 562 | 172 | 562 | 172 | | | | | | | |
| 462.libquantum | 8 | 830 | 200 | 826 | 201 | 825 | 201 | | | | | | | |
| 464.h264ref | 8 | 606 | 292 | 606 | 292 | 606 | 292 | | | | | | | |
| 471.omnetpp | 8 | 661 | 75.6 | 659 | 75.9 | 661 | 75.6 | | | | | | | |
| 473.astar | 8 | 644 | 87.2 | 649 | 86.6 | 647 | 86.8 | | | | | | | |
| 483.xalancbmk | 8 | 411 | 134 | 411 | 134 | 412 | 134 | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset has been used to bind processes to cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
Memory Throttling = Enable

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S4, Intel Xeon X5470, 3.33 GHz

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 139

Test date: Oct-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc`

Base Portability Flags

`400.perlbench: -DSPEC_CPU_LINUX_IA32`

`462.libquantum: -DSPEC_CPU_LINUX`

`483.xalancbmk: -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch`

C++ benchmarks:

`-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.12.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.12.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:26:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 November 2008.