



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp®\_rate2006 = 56.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_rate\_base2006 = 54.3

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2008

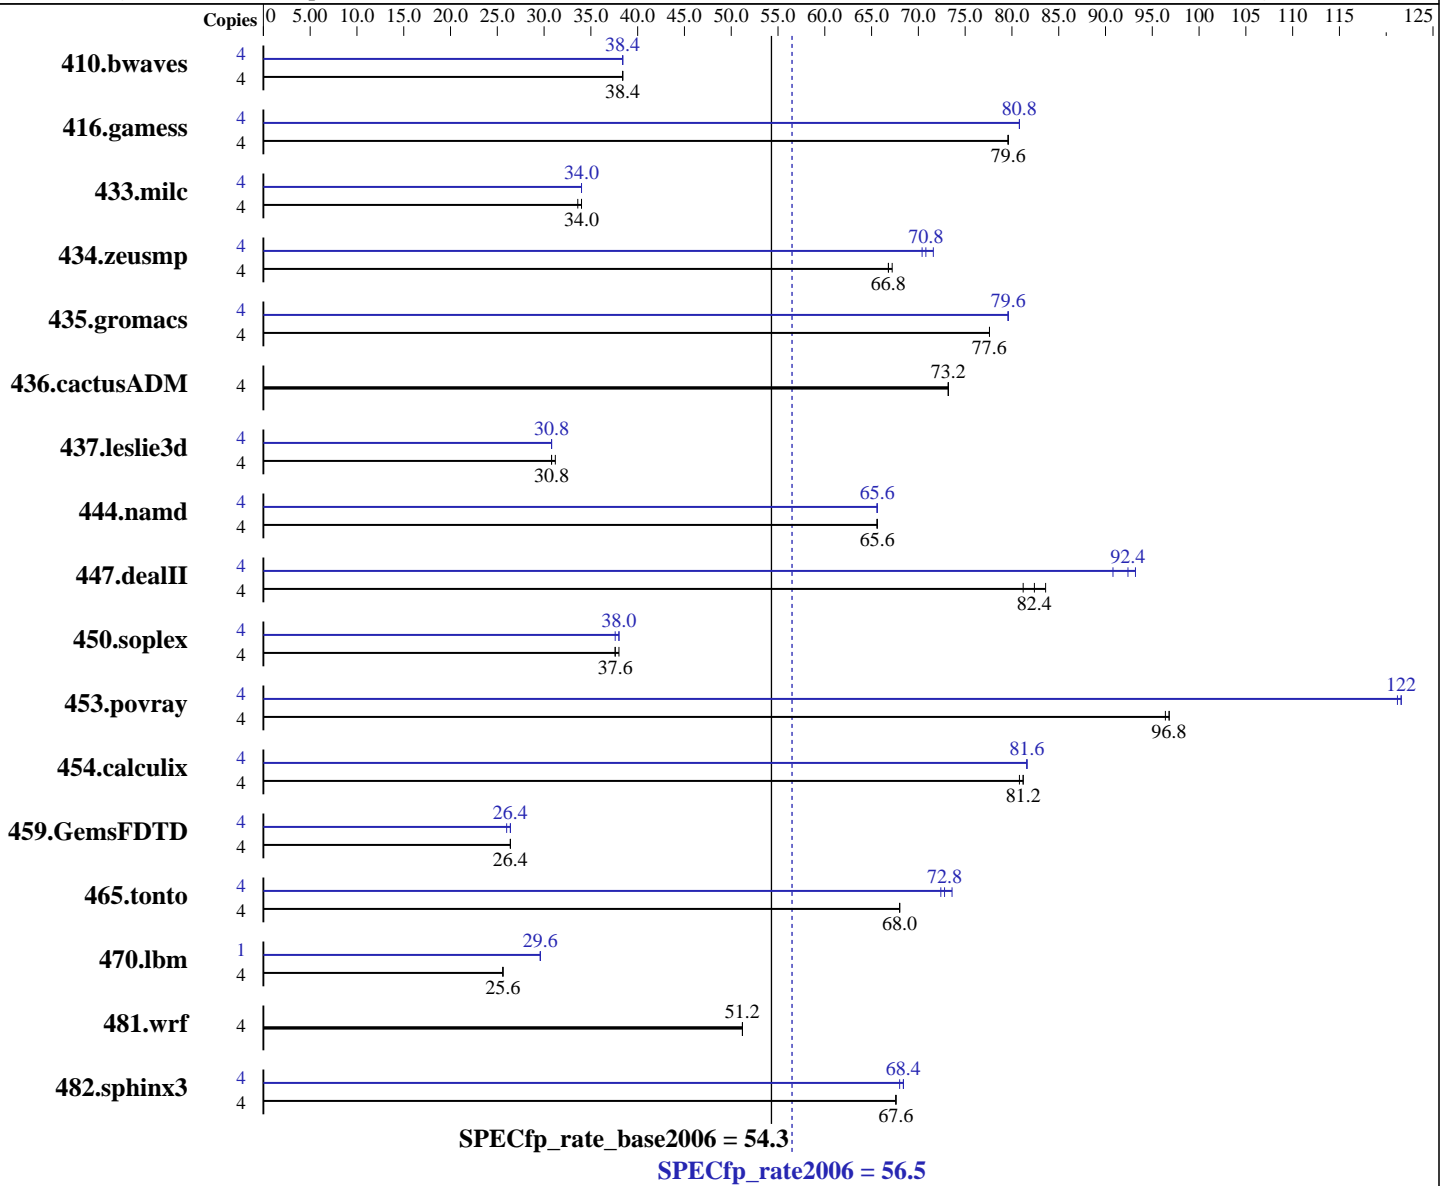

## Hardware

CPU Name: Intel Core 2 Extreme QX9770  
 CPU Characteristics:  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

## Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)  
 Compiler: Intel C++ Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cproc\_p\_11.0.054  
 Intel Visual Fortran Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cprof\_p\_11.0.054  
 Microsoft Visual Studio 2008 (for libraries)  
 Auto Parallel: No  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 56.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_rate\_base2006 = 54.3

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 4 GB (4 x 1GB Corsair CM3X1024-1333C9DHX DDR3-1333 CL9)  
Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive  
Other Hardware: None

System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1411	38.4	<b>1411</b>	<b>38.4</b>	1411	38.4	4	1411	38.4	1411	38.4	<b>1411</b>	<b>38.4</b>
416.gamess	4	985	79.6	<b>986</b>	<b>79.6</b>	986	79.6	4	970	80.8	<b>971</b>	<b>80.8</b>	971	80.8
433.milc	4	1086	33.6	1086	34.0	<b>1086</b>	<b>34.0</b>	4	<b>1083</b>	<b>34.0</b>	1083	34.0	1083	34.0
434.zeusmp	4	546	66.8	542	67.2	<b>544</b>	<b>66.8</b>	4	517	70.4	<b>515</b>	<b>70.8</b>	509	71.6
435.gromacs	4	367	77.6	<b>367</b>	<b>77.6</b>	367	77.6	4	359	79.6	359	79.6	<b>359</b>	<b>79.6</b>
436.cactusADM	4	653	73.2	<b>654</b>	<b>73.2</b>	654	73.2	4	653	73.2	<b>654</b>	<b>73.2</b>	654	73.2
437.leslie3d	4	<b>1214</b>	<b>30.8</b>	1212	31.2	1216	30.8	4	1215	30.8	1216	30.8	<b>1216</b>	<b>30.8</b>
444.namd	4	<b>488</b>	<b>65.6</b>	488	65.6	488	65.6	4	488	65.6	488	65.6	<b>488</b>	<b>65.6</b>
447.dealII	4	547	83.6	<b>555</b>	<b>82.4</b>	564	81.2	4	505	90.8	491	93.2	<b>495</b>	<b>92.4</b>
450.soplex	4	881	38.0	<b>883</b>	<b>37.6</b>	885	37.6	4	<b>882</b>	<b>38.0</b>	882	38.0	883	37.6
453.povray	4	220	96.4	220	96.8	<b>220</b>	<b>96.8</b>	4	175	122	<b>175</b>	<b>122</b>	175	121
454.calculix	4	406	81.2	408	80.8	<b>406</b>	<b>81.2</b>	4	<b>404</b>	<b>81.6</b>	404	81.6	404	81.6
459.GemsFDTD	4	1608	26.4	<b>1611</b>	<b>26.4</b>	1611	26.4	4	1616	26.4	1630	26.0	<b>1619</b>	<b>26.4</b>
465.tonto	4	580	68.0	<b>580</b>	<b>68.0</b>	579	68.0	4	536	73.6	543	72.4	<b>540</b>	<b>72.8</b>
470.lbm	4	2144	25.6	<b>2144</b>	<b>25.6</b>	2144	25.6	1	465	29.6	<b>465</b>	<b>29.6</b>	465	29.6
481.wrf	4	876	51.2	871	51.2	<b>875</b>	<b>51.2</b>	4	876	51.2	871	51.2	<b>875</b>	<b>51.2</b>
482.sphinx3	4	1151	67.6	<b>1152</b>	<b>67.6</b>	1154	67.6	4	1144	68.0	1139	68.4	<b>1143</b>	<b>68.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply  
The system bus runs at 1600 MHz  
System was configured with nVidia GTX 280 discrete graphics card  
Binaries were built on Windows Vista Ultimate (32-bit)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 56.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_rate\_base2006 = 54.3

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2008

## Base Compiler Invocation

C benchmarks:  
icl -Qvc9 -Qc99  
C++ benchmarks:  
icl -Qvc9  
Fortran benchmarks:  
ifort  
Benchmarks using both Fortran and C:  
icl -Qvc9 -Qc99 ifort

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000  
C++ benchmarks:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F1000000000 shlw32m.lib -link /FORCE:MULTIPLE  
Fortran benchmarks:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000  
Benchmarks using both Fortran and C:  
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc9 -Qc99  
C++ benchmarks:  
icl -Qvc9

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 56.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_rate\_base2006 = 54.3

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2008

## Peak Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc9 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F1000000000

482.sphinx3: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

447.dealII: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
-Qscalar-rep- /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

450.soplex: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000  
shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 56.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp\_rate\_base2006 = 54.3

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Oct-2008  
Hardware Availability: Apr-2008  
Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

416.gamess: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- /F1000000000

437.leslie3d: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

459.GemsFDTD: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch /F1000000000

465.tonto: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.1(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.1 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.html>  
<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
(Test Sponsor: Intel Corporation)

**SPECfp\_rate2006 = 56.5**

**Asus P5E3 Premium (Intel Core 2 Extreme QX9770)**

**SPECfp\_rate\_base2006 = 54.3**

**CPU2006 license:** 13  
**Test sponsor:** Intel Corporation  
**Tested by:** Intel Corporation

**Test date:** Oct-2008  
**Hardware Availability:** Apr-2008  
**Software Availability:** Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:16:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 November 2008.