



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 109

Asus P6T Deluxe (Intel Core i7-920)

SPECint_rate_base2006 = 102

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

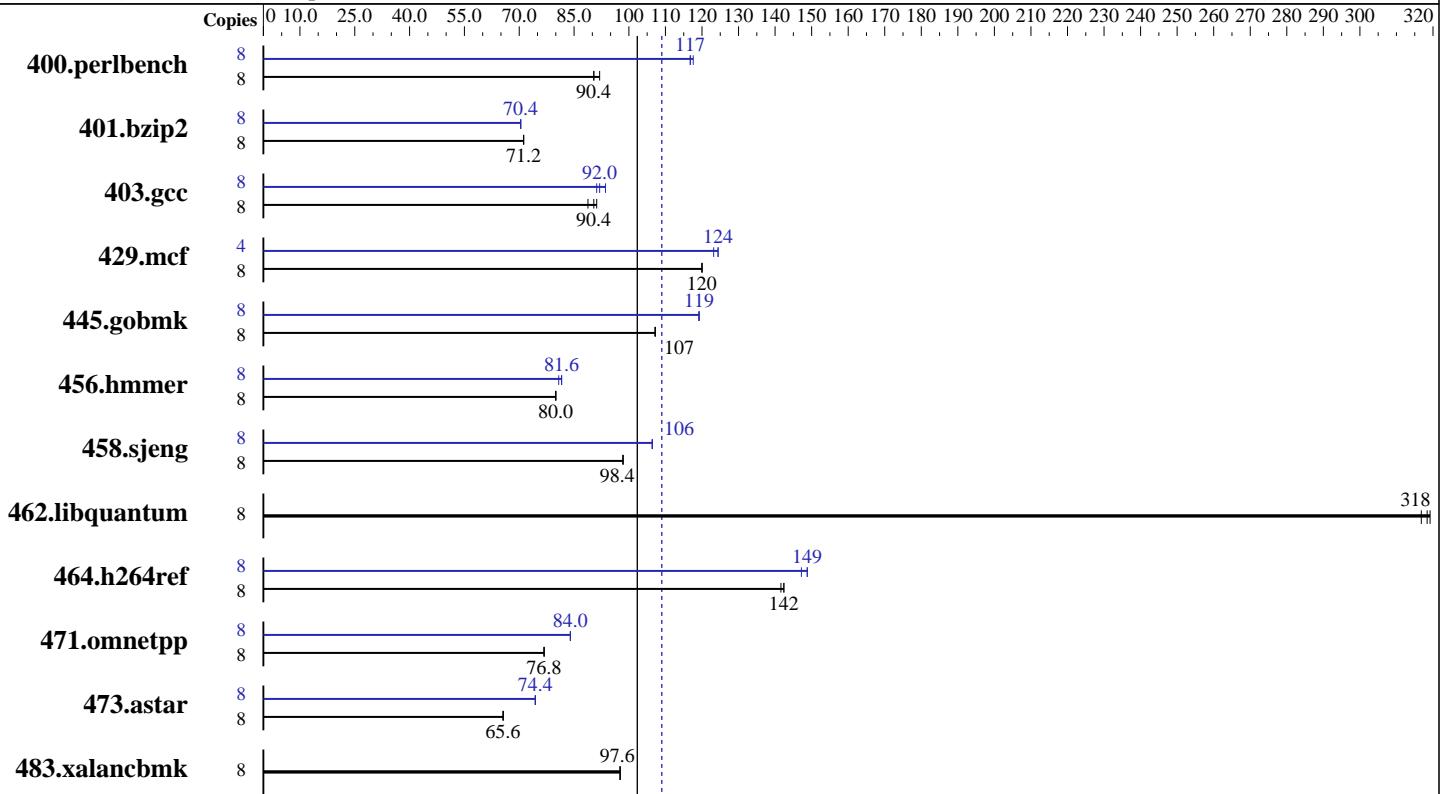

SPECint_rate_base2006 = 102

SPECint_rate2006 = 109

Hardware

CPU Name:	Intel Core i7-920
CPU Characteristics:	Intel Turbo Boost Technology up to 2.93 GHz
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
Disk Subsystem:	80 GB Intel X-25M SATA Solid-State Drive
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None SmartHeap Library Version 8.1 from http://www.microquill.com/



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 109

Asus P6T Deluxe (Intel Core i7-920)

SPECint_rate_base2006 = 102

CPU2006 license: 13

Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	863	90.4	852	92.0	863	90.4	8	665	118	668	117	671	117
401.bzip2	8	1090	71.2	1090	71.2	1088	71.2	8	1093	70.4	1096	70.4	1094	70.4
403.gcc	8	707	91.2	714	90.4	729	88.8	8	691	93.6	707	91.2	698	92.0
429.mcf	8	609	120	609	120	608	120	4	296	123	294	124	294	124
445.gobmk	8	784	107	784	107	784	107	8	703	119	703	119	703	119
456.hmmer	8	932	80.0	933	80.0	933	80.0	8	919	81.6	921	80.8	919	81.6
458.sjeng	8	981	98.4	981	98.4	981	98.4	8	908	106	908	106	908	106
462.libquantum	8	520	319	523	317	520	318	8	520	319	523	317	520	318
464.h264ref	8	1248	142	1247	142	1247	142	8	1190	149	1192	149	1203	147
471.omnetpp	8	651	76.8	651	76.8	651	76.8	8	594	84.0	594	84.0	594	84.0
473.astar	8	853	65.6	853	65.6	854	65.6	8	756	74.4	757	74.4	756	74.4
483.xalancbmk	8	565	97.6	565	97.6	565	97.6	8	565	97.6	565	97.6	565	97.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with nVidia GTX 280 discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)

Base Compiler Invocation

C benchmarks:

 icl -Qvc9 -Qc99

C++ benchmarks:

 icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 109

Asus P6T Deluxe (Intel Core i7-920)

SPECint_rate_base2006 = 102

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

C++ benchmarks:

```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F5120000000 shlw32m.lib -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

C++ benchmarks:

```
icl -Qvc9
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F5120000000 shlw32m.lib -link /FORCE:MULTIPLE
```

```
401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000
```

```
403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 109

Asus P6T Deluxe (Intel Core i7-920)

SPECint_rate_base2006 = 102

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias
/F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll14 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F5120000000 shlw32m.lib
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine /F5120000000 shlw32m.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.html>
<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.xml>
<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 109

Asus P6T Deluxe (Intel Core i7-920)

SPECint_rate_base2006 = 102

CPU2006 license: 13

Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:09:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2008.