



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = Not Run

PRIMERGY RX200 S4, Intel Xeon L5430, 2.67 GHz

SPECint_rate_base2006 = 123

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

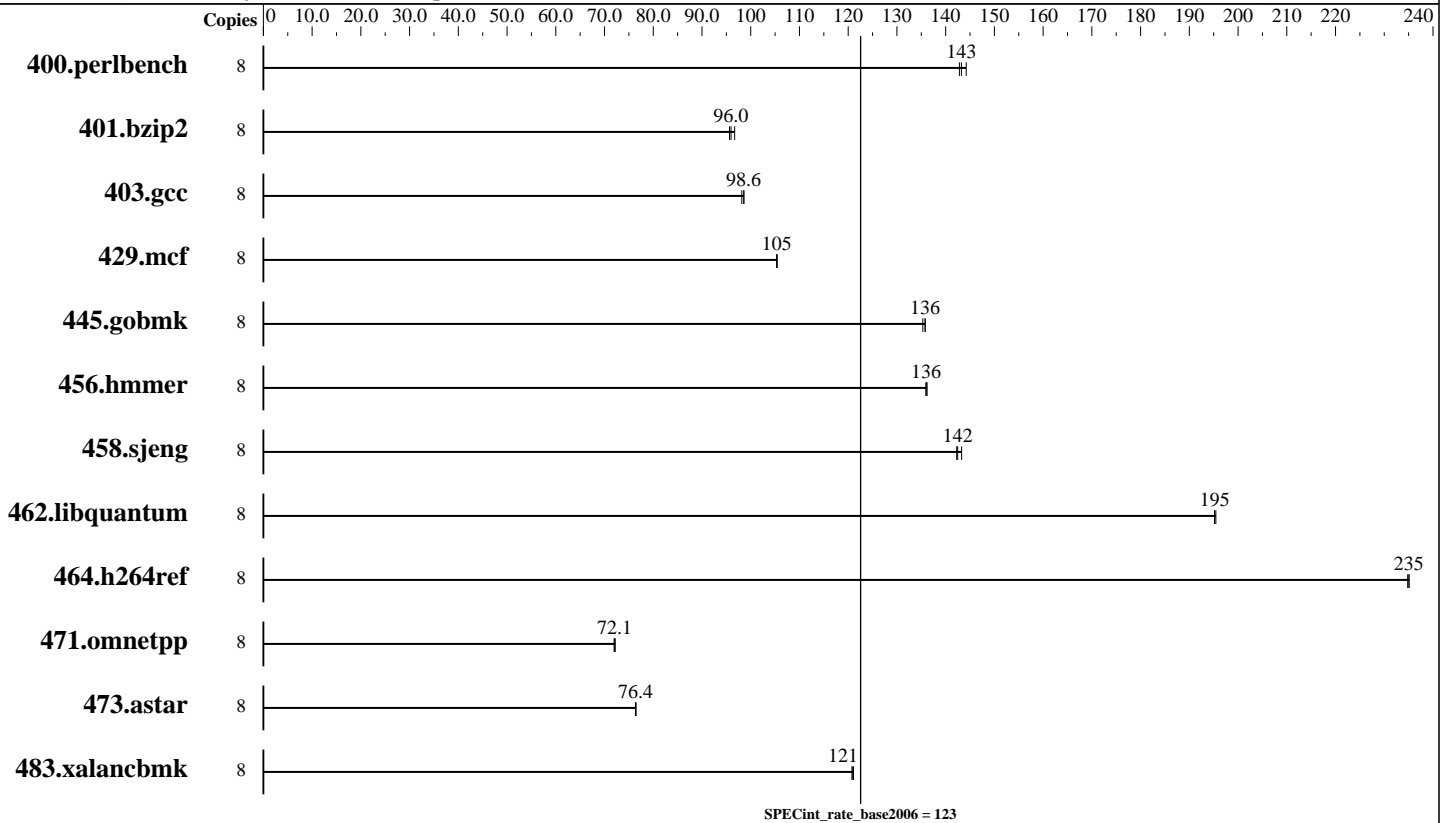

Hardware

CPU Name: Intel Xeon L5430
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x SAS, 73 GB, 15000 rpm
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: Microquill SmartHeap Library, Version 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = Not Run

PRIMERGY RX200 S4, Intel Xeon L5430, 2.67 GHz

SPECint_rate_base2006 = 123

CPU2006 license: 22

Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	542	144	<u>546</u>	<u>143</u>	547	143							
401.bzip2	8	798	96.7	807	95.6	<u>805</u>	<u>96.0</u>							
403.gcc	8	656	98.2	<u>653</u>	<u>98.6</u>	653	98.6							
429.mcf	8	693	105	692	105	<u>692</u>	<u>105</u>							
445.gobmk	8	620	135	618	136	<u>618</u>	<u>136</u>							
456.hammer	8	<u>549</u>	<u>136</u>	548	136	549	136							
458.sjeng	8	<u>679</u>	<u>142</u>	676	143	680	142							
462.libquantum	8	848	195	849	195	<u>849</u>	<u>195</u>							
464.h264ref	8	753	235	<u>753</u>	<u>235</u>	754	235							
471.omnetpp	8	693	72.2	695	72.0	<u>694</u>	<u>72.1</u>							
473.astar	8	736	76.4	734	76.5	<u>735</u>	<u>76.4</u>							
483.xalancbmk	8	<u>456</u>	<u>121</u>	457	121	456	121							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset has been used to bind processes to cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
Memory Throttling = Enable

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = Not Run

PRIMERGY RX200 S4, Intel Xeon L5430, 2.67 GHz

SPECint_rate_base2006 = 123

CPU2006 license: 22

Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.16.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.16.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:48:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.