



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint[®]2006 = 20.8

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_base2006 = 17.2

CPU2006 license: 3


Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

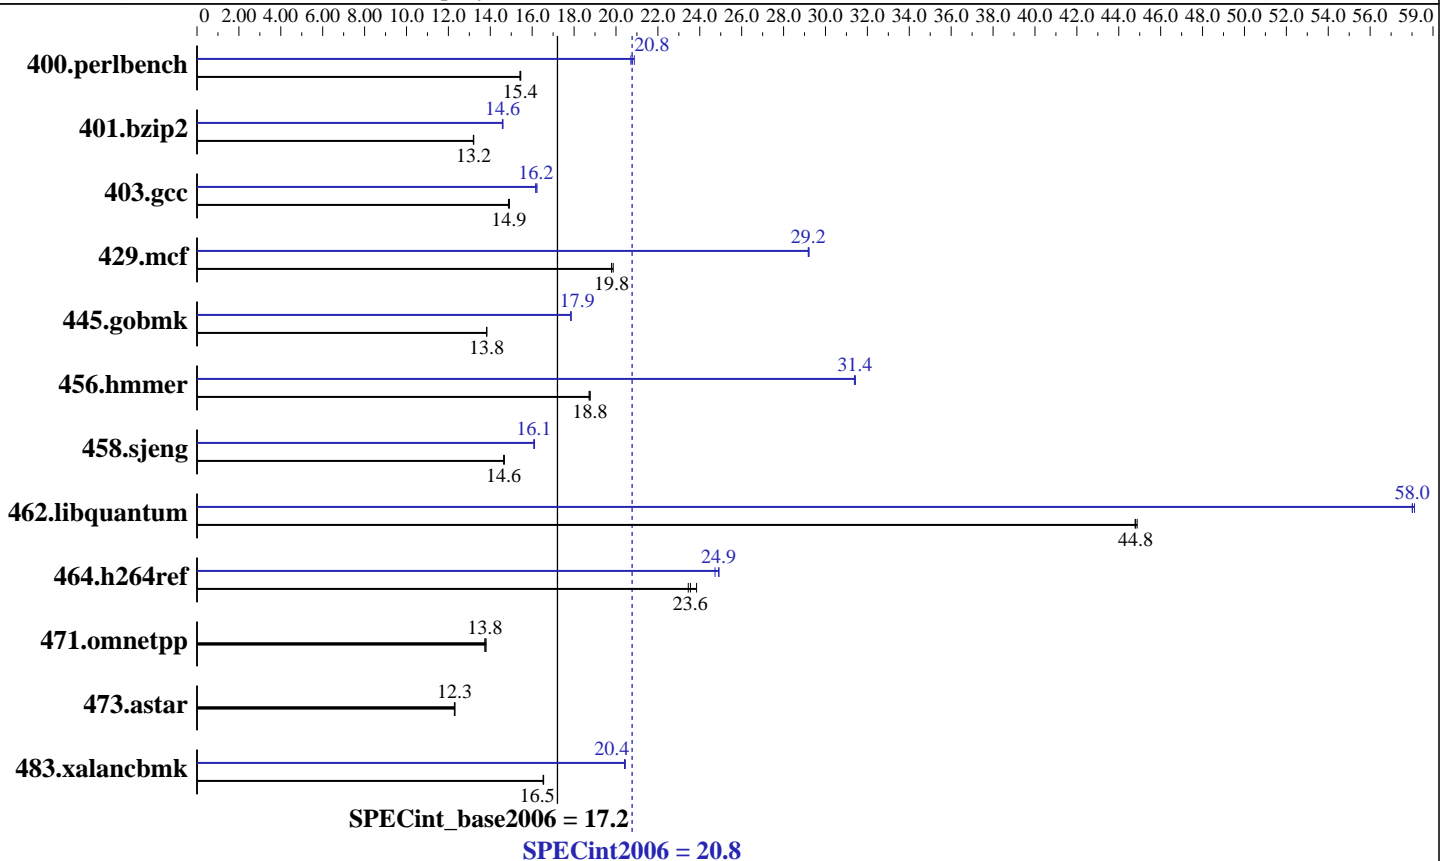

Hardware

CPU Name: AMD Opteron 2384
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4x4 GB, PC2-6400P CL5)
 Disk Subsystem: 2x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.17.50
 32-bit and 64-bit libhugetlbfs libraries
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **20.8**

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_base2006 = **17.2**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Jun-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	632	15.5	634	15.4	633	15.4	470	20.8	468	20.9	472	20.7
401.bzip2	731	13.2	730	13.2	732	13.2	661	14.6	662	14.6	661	14.6
403.gcc	540	14.9	541	14.9	540	14.9	496	16.2	497	16.2	498	16.2
429.mcf	461	19.8	461	19.8	459	19.9	312	29.2	312	29.2	313	29.2
445.gobmk	758	13.8	759	13.8	759	13.8	588	17.8	587	17.9	588	17.9
456.hammer	498	18.8	499	18.7	497	18.8	297	31.4	297	31.4	297	31.4
458.sjeng	826	14.6	825	14.7	826	14.6	752	16.1	751	16.1	752	16.1
462.libquantum	462	44.9	463	44.8	462	44.8	357	58.1	357	58.0	357	58.0
464.h264ref	944	23.5	940	23.6	928	23.8	895	24.7	889	24.9	888	24.9
471.omnetpp	455	13.7	454	13.8	453	13.8	455	13.7	454	13.8	453	13.8
473.astar	570	12.3	571	12.3	571	12.3	570	12.3	571	12.3	571	12.3
483.xalancbmk	417	16.5	418	16.5	417	16.5	337	20.4	338	20.4	338	20.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 3584.
NCPUS set to number of cores

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.8

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_base2006 = 17.2

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic_pgi

```

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.8

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_base2006 = 17.2

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
-IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
-CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
-OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
-m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
-LNO:trip_count=256 -LNO:prefetch_ahead=10
-CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-L/usr/lib -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.8

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_base2006 = 17.2

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/cpu2006/SmartHeap_8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

456.hmmcr: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 20.8

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_base2006 = 17.2

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):
-Mipa=jobs:4

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:00:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 November 2008.