



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55


Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

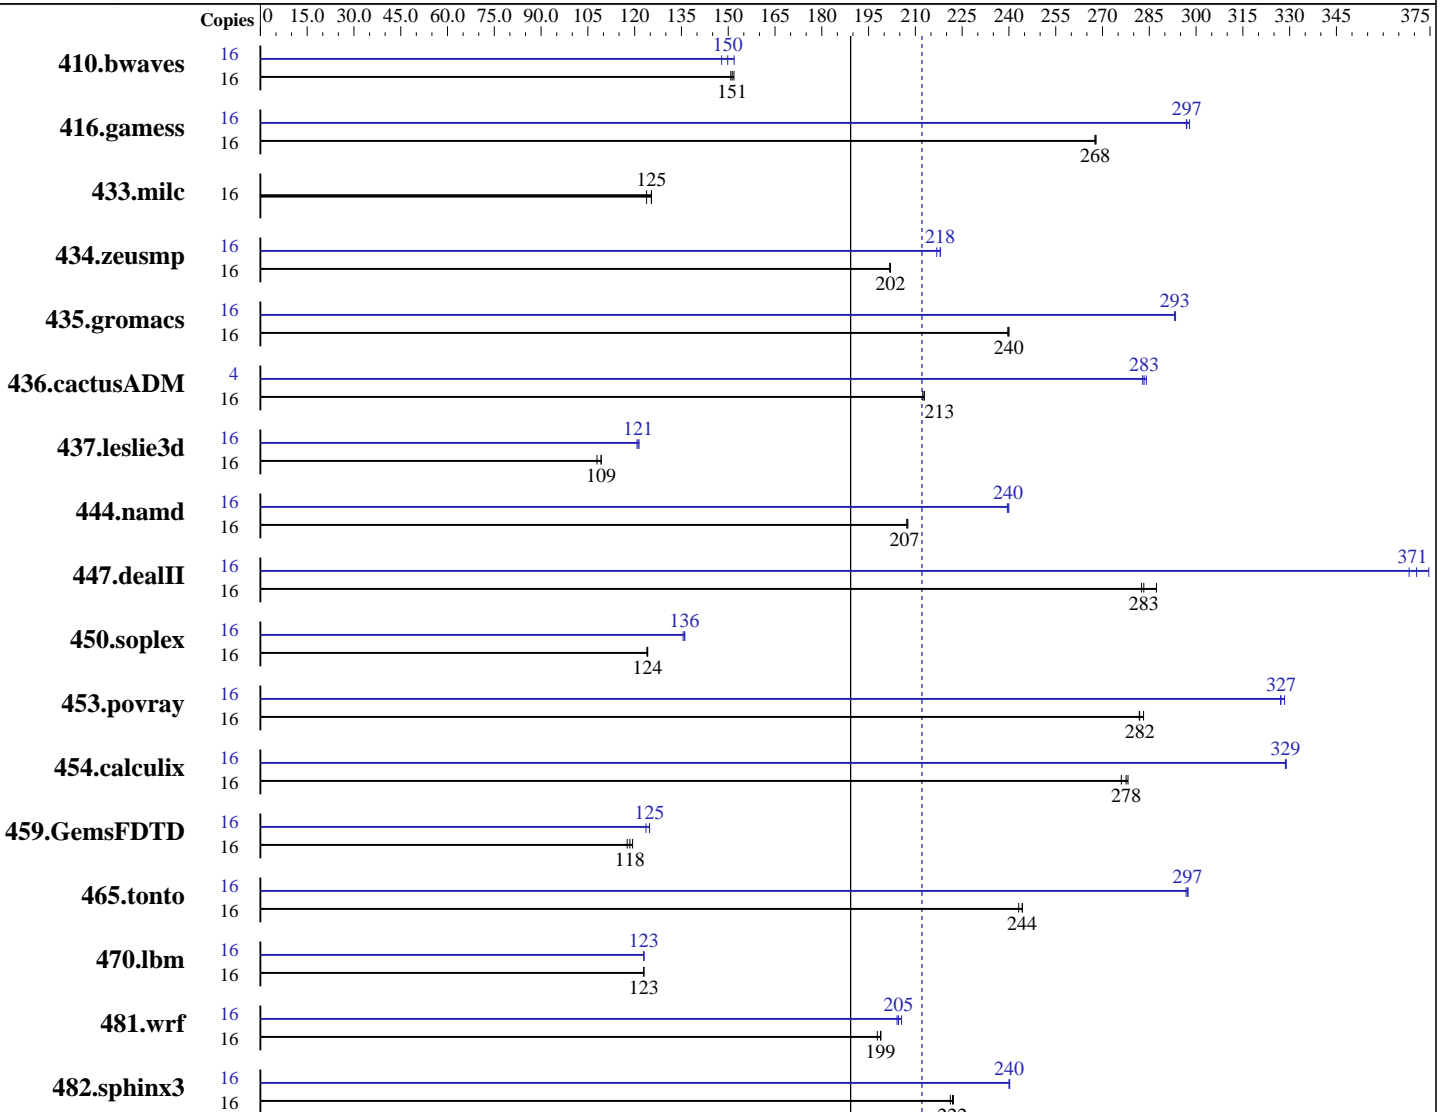

SPECfp\_rate\_base2006 = 189

SPECfp\_rate2006 = 212

### Hardware

CPU Name: AMD Opteron 8384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB DDR2-800)  
 Disk Subsystem: 1 x 36 GB 15000 RPM SAS (OS), 1 x 73 GB 10000 RPM SAS (CPU2006)  
 Other Hardware: None

Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1432	152	<b>1437</b>	<b>151</b>	1442	151	16	1470	148	<b>1451</b>	<b>150</b>	1431	152		
416.gamess	16	1171	268	<b>1170</b>	<b>268</b>	1169	268	16	<b>1055</b>	<b>297</b>	1052	298	1055	297		
433.milc	16	<b>1172</b>	<b>125</b>	1171	125	1186	124	16	<b>1172</b>	<b>125</b>	1171	125	1186	124		
434.zeusmp	16	721	202	722	202	<b>721</b>	<b>202</b>	16	668	218	<b>668</b>	<b>218</b>	671	217		
435.gromacs	16	477	240	<b>476</b>	<b>240</b>	476	240	16	389	293	390	293	<b>390</b>	<b>293</b>		
436.cactusADM	16	898	213	<b>898</b>	<b>213</b>	900	212	4	169	283	168	284	<b>169</b>	<b>283</b>		
437.leslie3d	16	1394	108	<b>1377</b>	<b>109</b>	1376	109	16	<b>1242</b>	<b>121</b>	1239	121	1245	121		
444.namd	16	619	207	618	208	<b>619</b>	<b>207</b>	16	536	240	535	240	<b>535</b>	<b>240</b>		
447.dealII	16	637	287	<b>646</b>	<b>283</b>	648	283	16	489	375	<b>494</b>	<b>371</b>	497	368		
450.soplex	16	1077	124	1074	124	<b>1075</b>	<b>124</b>	16	985	136	<b>981</b>	<b>136</b>	981	136		
453.povray	16	301	283	<b>302</b>	<b>282</b>	302	282	16	260	327	<b>260</b>	<b>327</b>	259	328		
454.calculix	16	475	278	478	276	<b>476</b>	<b>278</b>	16	401	329	<b>402</b>	<b>329</b>	402	329		
459.GemsFDTD	16	1444	118	<b>1433</b>	<b>118</b>	1422	119	16	1360	125	1373	124	<b>1361</b>	<b>125</b>		
465.tonto	16	<b>645</b>	<b>244</b>	644	244	648	243	16	529	297	530	297	<b>530</b>	<b>297</b>		
470.lbm	16	<b>1788</b>	<b>123</b>	1788	123	1788	123	16	<b>1788</b>	<b>123</b>	1788	123	1788	123		
481.wrf	16	<b>899</b>	<b>199</b>	904	198	898	199	16	869	206	876	204	<b>874</b>	<b>205</b>		
482.sphinx3	16	1410	221	<b>1405</b>	<b>222</b>	1403	222	16	1298	240	1299	240	<b>1299</b>	<b>240</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
 mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_MORECORE = "yes"

LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"

NCPUS = "4"

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deall: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-fno-exceptions -m32

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3  
-INLINE:aggressive=on -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-OPT:malloc\_alg=1 -CG:load\_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc  
-Mprefetch=nta -Mfprefaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprefaxed  
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge  
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse  
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0  
-Mfprefaxed -tp barcelona-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:prefer\_lru\_reg=off  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-OPT:malloc\_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

## Peak Other Flags

C benchmarks:  
-Mipa=jobs:4(pass 2)

C++ benchmarks:  
444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):  
-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 212

PowerEdge M905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 189

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:28:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 November 2008.