



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 154

Dell Precision T7400 (Intel Xeon X5492, 3.40 GHz)

SPECint\_rate\_base2006 = 143

CPU2006 license: 55


Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

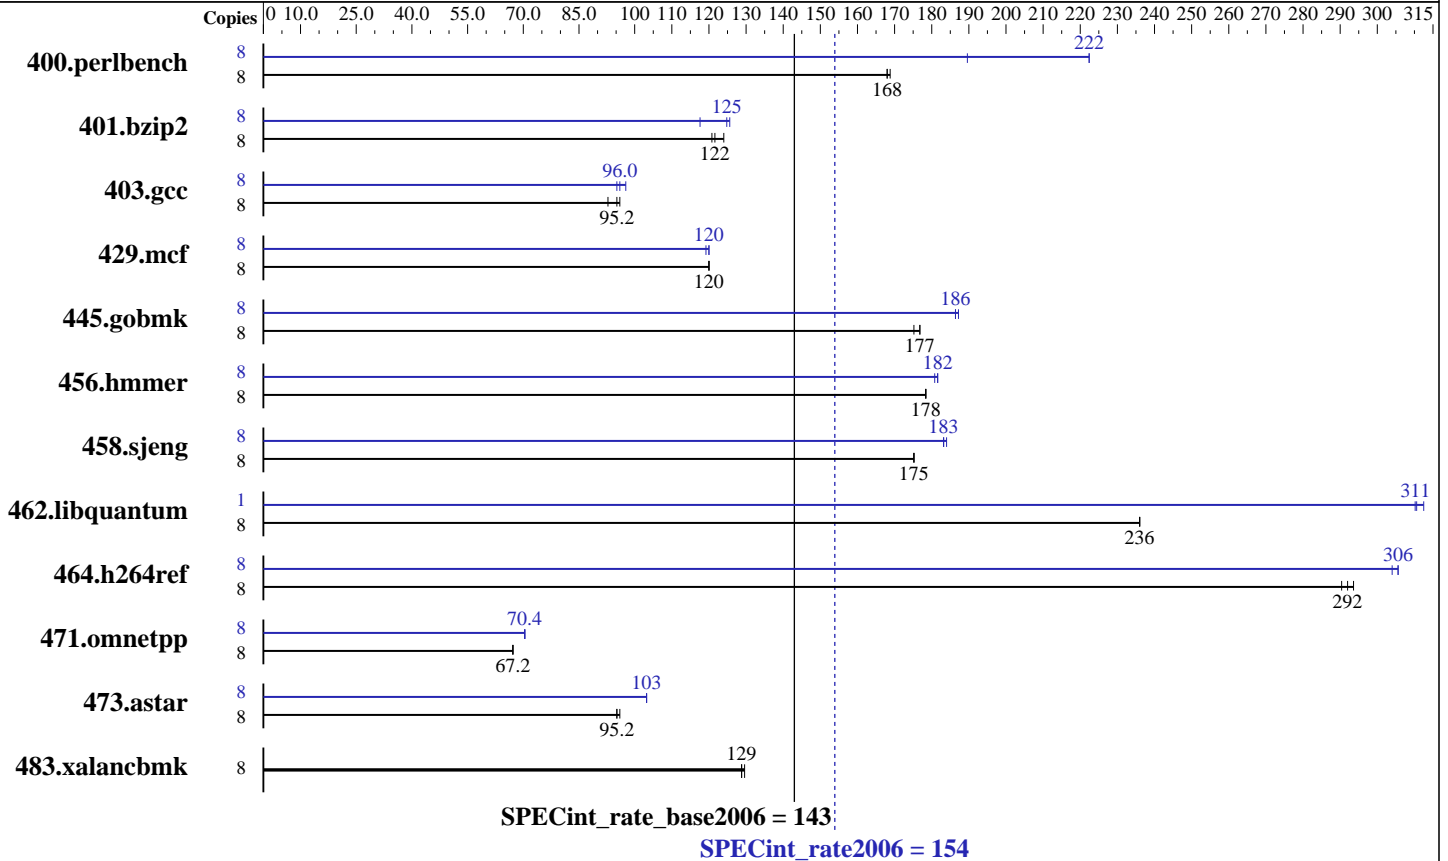

### Hardware

CPU Name: Intel Xeon X5492  
 CPU Characteristics: 1600 MHz Bus Speed  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB DDR2-800 FB-DIMM, CL5)  
 Disk Subsystem: 1 x 80 GB SATA 7200 RPM  
 Other Hardware: None

### Software

Operating System: Windows Vista Business SP1 (64-bit)  
 Compiler: Intel C++ Compiler for IA-32, Version 11.0  
 Build 20080930 Package ID: w\_cproc\_p\_11.0.061  
 Microsoft Visual Studio 2008 SP1  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 154

Dell Precision T7400 (Intel Xeon X5492, 3.40 GHz)

SPECint\_rate\_base2006 = 143

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	465	168	<b>464</b>	<b>168</b>	463	169	8	412	190	351	222	<b>352</b>	<b>222</b>
401.bzip2	8	638	121	622	124	<b>636</b>	<b>122</b>	8	615	126	655	118	<b>619</b>	<b>125</b>
403.gcc	8	<b>678</b>	<b>95.2</b>	694	92.8	672	96.0	8	<b>673</b>	<b>96.0</b>	675	95.2	662	97.6
429.mcf	8	<b>608</b>	<b>120</b>	607	120	609	120	8	613	119	<b>608</b>	<b>120</b>	607	120
445.gobmk	8	<b>475</b>	<b>177</b>	474	177	478	175	8	<b>449</b>	<b>186</b>	450	186	449	187
456.hammer	8	<b>418</b>	<b>178</b>	419	178	418	178	8	413	181	<b>412</b>	<b>182</b>	411	182
458.sjeng	8	<b>552</b>	<b>175</b>	552	175	552	175	8	<b>527</b>	<b>183</b>	529	183	527	184
462.libquantum	8	702	236	704	236	<b>703</b>	<b>236</b>	1	66.8	310	66.3	313	<b>66.7</b>	<b>311</b>
464.h264ref	8	609	290	<b>606</b>	<b>292</b>	603	294	8	<b>580</b>	<b>306</b>	583	304	579	306
471.omnetpp	8	743	67.2	<b>743</b>	<b>67.2</b>	744	67.2	8	707	70.4	<b>708</b>	<b>70.4</b>	708	70.4
473.astar	8	591	95.2	587	96.0	<b>590</b>	<b>95.2</b>	8	<b>543</b>	<b>103</b>	543	103	545	103
483.xalancbmk	8	<b>428</b>	<b>129</b>	428	129	427	130	8	<b>428</b>	<b>129</b>	428	129	427	130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

## Base Compiler Invocation

C benchmarks:  
 icl -Qvc9 -Qstd=c99

C++ benchmarks:  
 icl -Qvc9

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
 464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
 483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
 -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 154

Dell Precision T7400 (Intel Xeon X5492, 3.40 GHz)

SPECint\_rate\_base2006 = 143

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Base Optimization Flags (Continued)

C++ benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof\_gen(pass 1) -QxSSE4.1(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: -Qprof\_gen(pass 1) -QxSSE4.1(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000

403.gcc: -Qprof\_gen(pass 1) -QxSSE4.1 -Qprof\_use(pass 2) -Qipo -O3  
-Qprec-div- /F512000000

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 154

Dell Precision T7400 (Intel Xeon X5492, 3.40 GHz)

SPECint\_rate\_base2006 = 143

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

445.gobmk: -Qprof\_gen(pass 1) -QxSSE4.1(pass 2) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
/F512000000

458.sjeng: -Qprof\_gen(pass 1) -QxSSE4.1(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
-Qparallel -Qpar-runtime-control -Qvec-guard-write  
/F512000000

464.h264ref: -Qprof\_gen(pass 1) -QxSSE4.1(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -Qprof\_gen(pass 1) -QxSSE4.1(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

473.astar: -Qprof\_gen(pass 1) -QxSSE4.1(pass 2) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 154

Dell Precision T7400 (Intel Xeon X5492, 3.40 GHz)

SPECint\_rate\_base2006 = 143

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:23:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 December 2008.