



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon X7460)

SPECfp®_rate2006 = 81.4

SPECfp_rate_base2006 = 73.8

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

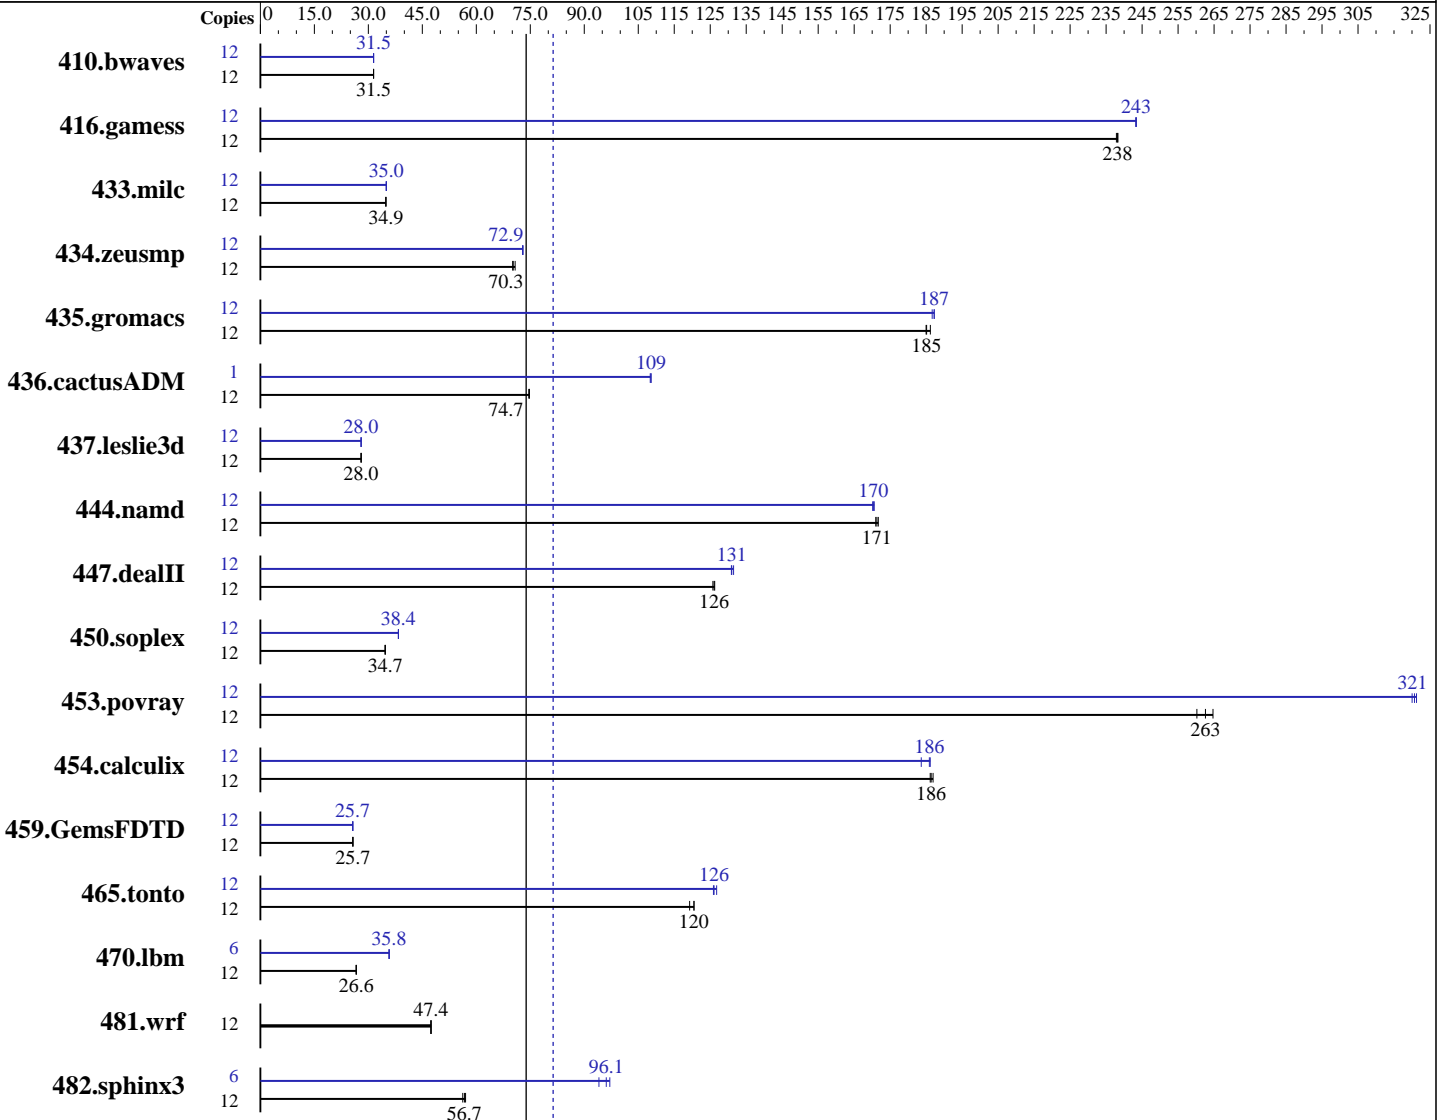

SPECfp_rate2006 = 81.4

SPECfp_rate_base2006 = 73.8

Hardware

CPU Name: Intel Xeon X7460
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.069, l_cprof_p_11.0.069
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon X7460)

SPECfp_rate2006 = 81.4

SPECfp_rate_base2006 = 73.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	5185	31.4	5185	31.5	5184	31.5	12	5184	31.5	5184	31.5	5184	31.5
416.gamess	12	986	238	988	238	987	238	12	966	243	965	243	966	243
433.milc	12	3159	34.9	3159	34.9	3158	34.9	12	3148	35.0	3148	35.0	3148	35.0
434.zeusmp	12	1554	70.3	1543	70.8	1558	70.1	12	1498	72.9	1496	73.0	1499	72.9
435.gromacs	12	460	186	463	185	463	185	12	458	187	458	187	459	187
436.cactusADM	12	1919	74.7	1922	74.6	1920	74.7	1	110	109	110	108	110	109
437.leslie3d	12	4026	28.0	4031	28.0	4031	28.0	12	4030	28.0	4027	28.0	4031	28.0
444.namd	12	562	171	563	171	561	172	12	566	170	565	170	564	171
447.dealII	12	1087	126	1092	126	1089	126	12	1044	131	1048	131	1049	131
450.soplex	12	2888	34.6	2884	34.7	2882	34.7	12	2609	38.4	2608	38.4	2610	38.3
453.povray	12	243	263	245	260	241	265	12	199	321	199	321	199	320
454.calculix	12	530	187	532	186	531	186	12	532	186	533	186	539	184
459.GemsFDTD	12	4954	25.7	4953	25.7	4953	25.7	12	4959	25.7	4958	25.7	4960	25.7
465.tonto	12	980	120	980	120	990	119	12	937	126	938	126	931	127
470.lbm	12	6190	26.6	6190	26.6	6189	26.6	6	2304	35.8	2305	35.8	2303	35.8
481.wrf	12	2826	47.4	2830	47.4	2825	47.4	12	2826	47.4	2830	47.4	2825	47.4
482.sphinx3	12	4102	57.0	4125	56.7	4159	56.2	6	1243	94.1	1204	97.1	1217	96.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except for 436.cactusADM peak
For peak modules using 1/2 the number of available cores, copies were each assigned to a single L2 cache using mysubmit.pl script.
See the flags description file for mysubmit.pl details.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon X7460)

SPECfp_rate2006 = 81.4

SPECfp_rate_base2006 = 73.8

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Platform Notes

Bios settings:
Hardware Prefetcher: Disabled
Adjacent Cache Line Prefetch: Disabled
FSB High Bandwidth Optimization: Enabled

General Notes

The NEC Express5800/R140a-4(Intel Xeon X7460) and the Bull NovaScale R480 E1(Intel Xeon X7460, 2.66 GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/R140a-4(Intel Xeon X7460) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon X7460)

SPECfp_rate2006 = 81.4

SPECfp_rate_base2006 = 73.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:

`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Fortran benchmarks:

`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc`

482.sphinx3: `/opt/intel/Compiler/11.0/069/bin/ia32/icc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include`

C++ benchmarks (except as noted below):

`icpc`

450.soplex: `/opt/intel/Compiler/11.0/069/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include`

Fortran benchmarks (except as noted below):

`ifort`

437.leslie3d: `/opt/intel/Compiler/11.0/069/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon X7460)

SPECfp_rate2006 = 81.4

SPECfp_rate_base2006 = 73.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -fno-alias

```

```

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
        -auto-ilp32

```

```

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

```

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -fno-alias -auto-ilp32

```

```

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

```

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -opt-malloc-options=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

```

```

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -unroll2 -Ob0 -ansi-alias
          -scalar-rep-

```

```

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R140a-4
(Intel Xeon X7460)

SPECfp_rate2006 = 81.4

SPECfp_rate_base2006 = 73.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:35:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 December 2008.