



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECfp®\_rate2006 = 116

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

### SPECfp\_rate\_base2006 = 104

CPU2006 license: 3


Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

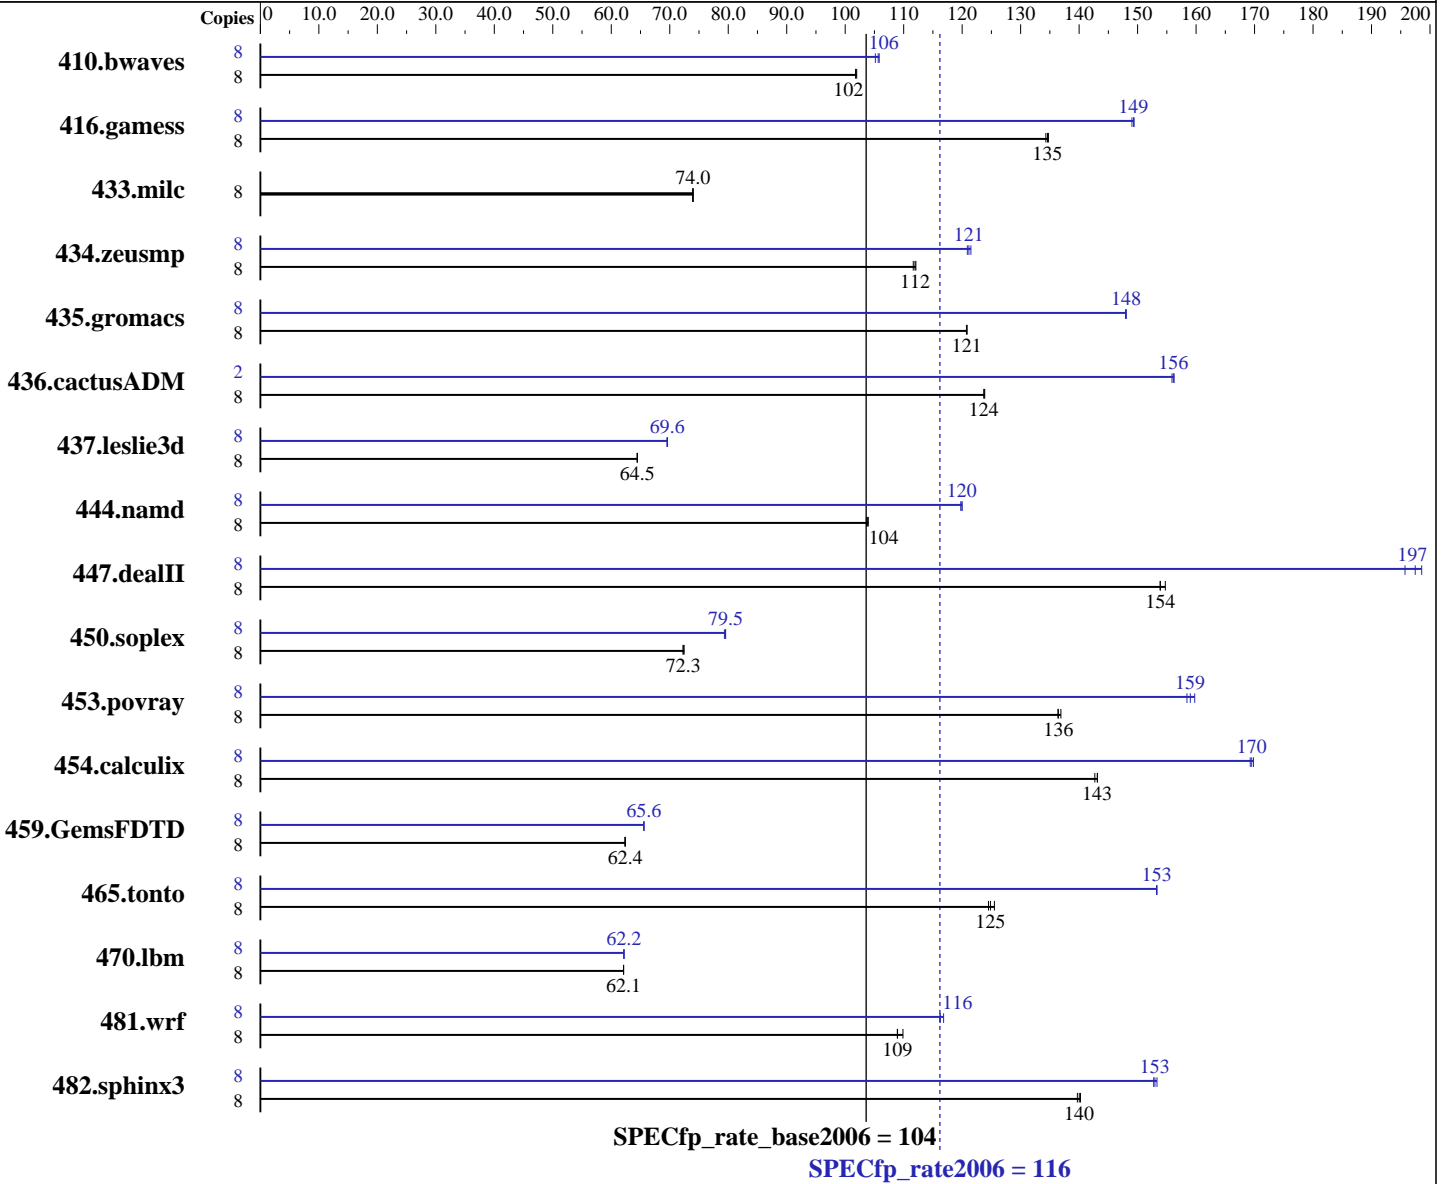

### Hardware

CPU Name: AMD Opteron 2384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 116

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

SPECfp\_rate\_base2006 = 104

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (8x4 GB, PC2-6400P CL5)  
Disk Subsystem: 1x72 GB 15 K SAS  
Other Hardware: None

Other Software: binutils 2.17.50.20070611-2  
32-bit and 64-bit libhugetlbfs libraries

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1068	102	1066	102	<b>1068</b>	<b>102</b>	8	1027	106	<b>1029</b>	<b>106</b>	1034	105
416.gamess	8	1162	135	<b>1164</b>	<b>135</b>	1166	134	8	1051	149	<b>1049</b>	<b>149</b>	1048	149
433.milc	8	992	74.0	993	73.9	<b>993</b>	<b>74.0</b>	8	992	74.0	993	73.9	<b>993</b>	<b>74.0</b>
434.zeusmp	8	652	112	650	112	<b>650</b>	<b>112</b>	8	599	121	602	121	<b>601</b>	<b>121</b>
435.gromacs	8	473	121	<b>473</b>	<b>121</b>	473	121	8	<b>386</b>	<b>148</b>	386	148	386	148
436.cactusADM	8	772	124	773	124	<b>773</b>	<b>124</b>	2	153	156	153	156	<b>153</b>	<b>156</b>
437.leslie3d	8	<b>1167</b>	<b>64.5</b>	1167	64.4	1166	64.5	8	<b>1081</b>	<b>69.6</b>	1080	69.6	1081	69.5
444.namd	8	619	104	617	104	<b>618</b>	<b>104</b>	8	535	120	<b>535</b>	<b>120</b>	536	120
447.dealII	8	<b>595</b>	<b>154</b>	591	155	595	154	8	461	199	<b>463</b>	<b>197</b>	468	196
450.soplex	8	923	72.3	921	72.5	<b>923</b>	<b>72.3</b>	8	841	79.3	839	79.6	<b>839</b>	<b>79.5</b>
453.povray	8	312	136	<b>312</b>	<b>136</b>	311	137	8	<b>268</b>	<b>159</b>	266	160	269	158
454.calculix	8	461	143	463	143	<b>461</b>	<b>143</b>	8	<b>389</b>	<b>170</b>	390	169	389	170
459.GemsFDTD	8	1360	62.4	<b>1360</b>	<b>62.4</b>	1362	62.3	8	1294	65.6	1295	65.6	<b>1294</b>	<b>65.6</b>
465.tonto	8	627	126	632	124	<b>631</b>	<b>125</b>	8	<b>514</b>	<b>153</b>	514	153	513	153
470.lbm	8	<b>1770</b>	<b>62.1</b>	1770	62.1	1770	62.1	8	1768	62.2	1768	62.2	<b>1768</b>	<b>62.2</b>
481.wrf	8	<b>820</b>	<b>109</b>	813	110	820	109	8	765	117	<b>769</b>	<b>116</b>	769	116
482.sphinx3	8	<b>1114</b>	<b>140</b>	1116	140	1112	140	8	<b>1019</b>	<b>153</b>	1021	153	1017	153

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 7168.  
NCPUS set to number of cores



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 116**

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

**SPECfp\_rate\_base2006 = 104**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Dec-2008  
**Hardware Availability:** Nov-2008  
**Software Availability:** Jun-2008

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"  
NCPUS = "4"

## Base Compiler Invocation

C benchmarks:  
pgcc  
  
C++ benchmarks:  
pgcpp  
  
Fortran benchmarks:  
pgf95  
  
Benchmarks using both Fortran and C:  
pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 116**

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

**SPECfp\_rate\_base2006 = 104**

**CPU2006 license:** 3

**Test date:** Dec-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Base Optimization Flags

C benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Fortran benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

## Base Other Flags

C benchmarks:

`-Mipa=jobs:4`

C++ benchmarks:

`-Mipa=jobs:4`

Fortran benchmarks:

`-Mipa=jobs:4`

Benchmarks using both Fortran and C:

`-Mipa=jobs:4`

## Peak Compiler Invocation

C benchmarks:

`pgcc`

C++ benchmarks (except as noted below):

`pathCC`

`444.namd: pgcpp`

Fortran benchmarks (except as noted below):

`pathf95`

`410.bwaves: pgf95`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 116**

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

**SPECfp\_rate\_base2006 = 104**

**CPU2006 license:** 3

**Test date:** Dec-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64

436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -Mnomain

459.GemsFDTD: -DSPEC\_CPU\_LP64

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge

-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 116**

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

**SPECfp\_rate\_base2006 = 104**

**CPU2006 license:** 3

**Test date:** Dec-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Optimization Flags (Continued)

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-fno-exceptions -m32

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3  
-INLINE:aggressive=on -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-OPT:malloc\_alg=1 -CG:load\_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc  
-Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed  
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge  
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse  
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0  
-Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:prefer\_lru\_reg=off  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 116**

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

**SPECfp\_rate\_base2006 = 104**

**CPU2006 license:** 3

**Test date:** Dec-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-OPT:malloc\_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL365 G5  
(2.7 GHz AMD Opteron 2384)

**SPECfp\_rate2006 = 116**

**SPECfp\_rate\_base2006 = 104**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Dec-2008  
**Hardware Availability:** Nov-2008  
**Software Availability:** Jun-2008

## Peak Other Flags (Continued)

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)  
[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)  
[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:29:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 December 2008.